


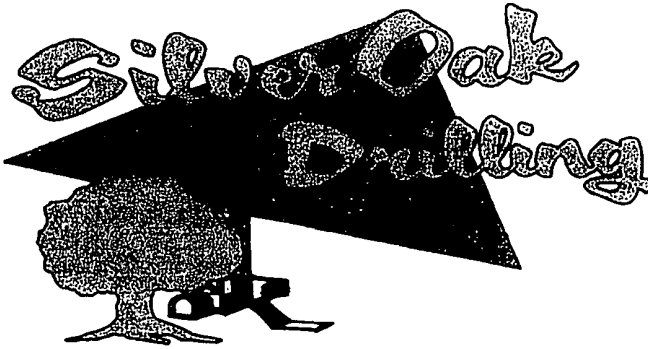

PO Box 1370
Artesia, NM 88211-1370
(575) 748-1288

15-38500

July 18, 2011

OGX Resources
PO box 11148
Midland, TX 79702

RE: Sidewinder 32 #1H
480' FSL & 480' FWL
Sec. 32, T26S, R29E
Eddy County, New Mexico

Dear Sir,


The attached is the Deviation Survey for the above captioned well.

Very truly yours,

Eddie C. LaRue
Operations Manager

State of New Mexico }
County of Eddy }

The foregoing was acknowledged before me this 18th day of July, 2011.

Notary Public

Pason DataHub Deviation Survey
Well Dossier 1309285290 - Sidewinder 1-H
#

#	Date	Depth	Deviation	Direction	TVD
	6/28/2011	2832	1.50	0.00	0
	6/29/2011	3315	0.50	0.00	0
	6/29/2011	3792	0.50	0.00	0
	6/29/2011	4300	0.20	0.00	0
	6/30/2011	4776	0.40	0.00	0
	6/30/2011	5253	0.70	0.00	0
	6/30/2011	5732	1.00	0.00	0
	7/3/2011	6260	1.30	184.50	0
	7/3/2011	6228	1.40	196.40	0
	7/3/2011	6353	3.90	128.20	0
	7/3/2011	6509	24.10	96.10	0
	7/4/2011	6540	22.90	97.40	0
	7/4/2011	6602	34.50	86.70	0
	7/4/2011	6665	42.40	85.50	0
	7/4/2011	6819	58.70	91.90	0
	7/5/2011	6852	61.30	91.40	0
	7/5/2011	6914	68.60	91.80	0
	7/5/2011	6946	72.00	92.00	0
	7/5/2011	7008	79.80	92.40	0
	7/6/2011	7459	87.70	91.10	0
	7/8/2011	8802	88.10	89.70	0
	7/10/2011	9762	88.60	91.90	0
	7/12/2011	10419	86.10	89.10	0
	7/12/2011	10961	90.30	92.80	6899
# EOF					



Western Drilling, Inc.
415 W. Wall Street, Suite 1750, Midland, TX 79701
Ph. (432) 683-1700 Fax (432) 683-1703

INCLINATION REPORT

DATE: 06/27/2011

WELL NAME AND NUMBER: Sidewinder #1H
API NUMBER: 30-015-38500
COUNTY: Eddy
STATE: New Mexico
LOCATION: Section 32-T26S-R29E
OPERATOR: OGX Resources, LLC
DRILLING CONTRACTOR: Western Drilling, Inc.

The undersigned hereby certifies that they are an authorized representative of the drilling contractor who drilled the above described well and that he has conducted deviation tests and obtained the following results:

DEV.: DIR.: DEPTH:

1.00	354'
0.75	460'
0.75	735'
1.00	1,035'
1.00	1,334'
1.00	1,619'
2.00	1,933'
1.75	2,191'


Drilling Contractor:


Western Drilling, Inc.

By: 

Marty K. Green
Contract Administrator

Subscribed and sworn to before me on this 27th day of June, 2011.

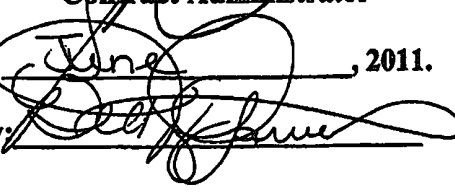By: 

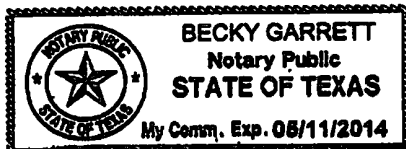



PHOENIX
TECHNOLOGY SERVICES

OGX Resources

Eddy County, New Mexico

Sidewinder # 1H

Job # 110354

Wellbore #1

Survey: Phoenix MWD Surveys

Phoenix Technology Surveys Report

13 July, 2011



Phoenix Technologies

Phoenix Technology Surveys Report

Company: OGX Resources
Project: Eddy County, New Mexico
Site: Sidewinder #1H
Well: Job # 110354
Wellbore: Wellbore #1
Design: Wellbore #1

Local Coordinate Reference: Well Job # 110354
NAD Reference: WELL @ 2907.00ft (RKB = 18')
MGRS Reference: WELL @ 2907.00ft (RKB = 18')
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: GCR3

Project: Eddy County, New Mexico

Map System: US State Plane 1927 (Exact solution)
Geo Datum: NAD 1927 (NADCON CONUS)
Map Zone: New Mexico East 3001

System Datum: Mean Sea Level

Site: Sidewinder #1H

Site Position: Northing: 364,345.20 ft Latitude: 32° 0' 4.66 N
From: Map Easting: 599,211.70 ft Longitude: 104° 0' 47.83 W
Position Uncertainty: 0.00 ft Slot Radius: " Grid Convergence: 0.17 °

Well: Job # 110354

Well Position: +N-S 0.00 ft Northing: 364,345.20 ft Latitude: 32° 0' 4.66 N
+E-W 0.00 ft Easting: 599,211.70 ft Longitude: 104° 0' 47.83 W
Position Uncertainty 0.00 ft Wellhead Elevation: 18.00 ft Ground Level: 2,889.00 ft

Wellbore: Wellbore #1

Magnetics	Magn Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(mT)
	IGRF2010_14	06/23/11	7.77	59.90	48,433

Design: Wellbore #1

Audit Notes:
Version: 1.0 Phase: ACTUAL Tie On Depth: 0.00

Vertical Section	Bath From FWD	N-S	E-W	Direction
	(ft)	(°)	(°)	(°)
	0.00	0.00	0.00	91.67



Phoenix Technologies

Phoenix Technology Surveys Report

Company	OGX Resources	Local Coordinate Reference	Well Job # 110354
Region	Eddy County, New Mexico	WVD Reference	WELL @ 2907.00ft (RKB = 18')
Site	Sidewinder #1H	MD Reference	WELL @ 2907.00ft (RKB = 18')
Well	Job # 110354	North Reference	Grid
Wellbore	Wellbore #1	Survey Calculation Method	Minimum Curvature
Design	Wellbore #1	Database	GCR3

Survey Program: Date: 07/13/11

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
100.00	6,162.00	Gyro Survey (Wellbore #1)	NS-GYRO-MS	North sensing gyrocompassing m/s
6,196.00	11,009.00	Phoenix MWD Surveys (Wellbore #1)	MWD	MWD - Standard

MD (ft)	Inc (°)	Azimuth (°)	TVSS (ft)	TVD (ft)	NS (ft)	EW (ft)	W. Sec (ft)	Depth (ft/100ft)	Northings (ft)	Eastings (ft)
6,162.00	1.17	203.63	-3,253.48	6,160.48	-68.98	12.97	14.97	0.00	364,276.22	599,224.67
6,196.00	1.10	194.20	-3,287.47	6,194.47	-69.62	12.75	14.77	0.59	364,275.58	599,224.45
6,228.00	1.40	196.40	-3,319.47	6,226.47	-70.29	12.56	14.61	0.95	364,274.91	599,224.26
6,260.00	1.30	184.50	-3,351.46	6,258.46	-71.03	12.43	14.49	0.93	364,274.17	599,224.13
6,291.00	1.20	185.10	-3,382.45	6,289.45	-71.70	12.37	14.45	0.33	364,273.50	599,224.07
6,353.00	3.90	128.20	-3,444.39	6,351.39	-73.65	13.97	16.11	5.48	364,271.55	599,225.67
6,385.00	8.20	114.40	-3,476.20	6,383.20	-75.27	16.90	19.09	14.09	364,269.93	599,228.60
6,416.00	12.40	107.50	-3,506.70	6,413.70	-77.18	22.09	24.33	14.10	364,268.02	599,233.79
6,447.00	16.20	102.00	-3,536.73	6,443.73	-79.09	29.50	31.79	13.00	364,266.11	599,241.20
6,478.00	20.40	99.00	-3,566.16	6,473.16	-80.83	39.07	41.41	13.88	364,264.37	599,250.77
6,509.00	24.10	96.10	-3,594.85	6,501.85	-82.35	50.71	53.08	12.45	364,262.85	599,262.41
6,540.00	27.70	92.20	-3,622.73	6,529.73	-83.30	64.20	66.60	12.84	364,261.90	599,275.90
6,571.00	30.70	89.30	-3,649.79	6,556.79	-83.48	79.32	81.72	10.70	364,261.72	599,291.02
6,602.00	34.50	86.70	-3,675.90	6,582.90	-82.88	96.01	98.38	13.06	364,262.32	599,307.71
6,634.00	38.30	85.40	-3,701.66	6,608.66	-81.56	114.94	117.27	12.12	364,263.64	599,326.64
6,665.00	42.40	85.50	-3,725.28	6,632.28	-79.97	134.95	137.22	13.23	364,265.23	599,346.65
6,696.00	45.20	86.80	-3,747.65	6,654.65	-78.53	156.35	158.58	9.49	364,266.67	599,368.05
6,727.00	48.40	88.70	-3,768.87	6,675.87	-77.66	178.93	181.12	11.25	364,267.54	599,390.63
6,758.00	51.40	90.60	-3,788.83	6,695.83	-77.52	202.64	204.81	10.75	364,267.68	599,414.34
6,790.00	55.10	91.40	-3,807.98	6,714.98	-77.97	228.27	230.44	11.73	364,267.23	599,439.97
6,821.00	58.70	91.90	-3,824.90	6,731.90	-78.72	254.22	256.41	11.69	364,266.48	599,465.92



Phoenix Technologies

Phoenix Technology Surveys Report

Company: OGX Resources
 Eddy County, New Mexico
 Sidewinder #1H
 Job # 110354
 Wellbore #1
 Wellbore #1

Local Coordinate Reference
 EVD Reference
 MDR Reference
 North Reference
 Survey Calculation Method
 Drape

Well Job # 110354
 WELL @ 2907.00R (RKB = 18')
 WELL @ 2907.00R (RKB = 18')
 Grid
 Minimum Curvature
 GCR3

Survey

MDP (ft)	In (ft)	Azi (azim) (ft)	TVBSS (ft)	TVB (ft)	N/S (ft)	EW (ft)	VaSec (ft)	Dip (%/100ft)	Northing (ft)	Easting (ft)
6,852.00	61.30	91.40	-3,840.40	6,747.40	-79.49	281.06	283.25	8.50	364,265.71	599,492.76
6,883.00	65.40	91.70	-3,854.31	6,761.31	-80.24	308.75	310.95	13.25	364,264.96	599,520.45
6,914.00	68.60	91.80	-3,866.42	6,773.42	-81.12	337.26	339.49	10.33	364,264.08	599,548.96
6,946.00	72.00	92.00	-3,877.20	6,784.20	-82.11	367.37	369.61	10.64	364,263.09	599,579.07
6,977.00	76.00	92.60	-3,885.74	6,792.74	-83.31	397.14	399.40	13.04	364,261.89	599,608.84
7,008.00	79.80	92.40	-3,892.24	6,799.24	-84.63	427.42	429.70	12.27	364,260.57	599,639.12
7,023.00	81.20	90.70	-3,894.72	6,801.72	-85.03	442.20	444.49	14.56	364,260.17	599,653.90
7,054.00	84.70	91.30	-3,898.52	6,805.52	-85.57	472.96	475.25	11.45	364,259.63	599,684.66
7,116.00	88.50	90.20	-3,902.20	6,809.20	-86.38	534.83	537.12	6.38	364,258.82	599,746.53
7,209.00	87.60	89.40	-3,905.36	6,812.36	-86.06	627.78	630.02	1.29	364,259.15	599,839.48
7,304.00	89.30	92.60	-3,907.93	6,814.93	-87.71	722.71	724.96	3.81	364,257.49	599,934.41
7,397.00	88.40	91.30	-3,909.80	6,816.80	-90.88	815.64	817.94	1.70	364,254.32	600,027.34
7,491.00	87.60	91.20	-3,913.08	6,820.08	-92.93	909.56	911.88	0.86	364,252.27	600,121.25
7,584.00	89.20	90.00	-3,915.68	6,822.68	-93.90	1,002.51	1,004.82	2.15	364,251.30	600,214.21
7,678.00	89.80	90.20	-3,916.50	6,823.50	-94.06	1,096.51	1,098.78	0.67	364,251.14	600,308.20
7,771.00	89.60	89.10	-3,916.98	6,823.98	-93.50	1,189.50	1,191.72	1.20	364,251.70	600,401.20
7,865.00	89.10	88.10	-3,918.05	6,825.05	-91.20	1,283.47	1,285.58	1.19	364,254.00	600,495.16
7,959.00	88.20	89.30	-3,920.27	6,827.27	-89.07	1,377.41	1,379.42	1.60	364,256.13	600,589.11
8,052.00	88.60	88.10	-3,922.86	6,829.86	-86.96	1,470.35	1,472.26	1.36	364,258.24	600,682.05
8,146.00	90.00	93.00	-3,924.01	6,831.01	-87.86	1,564.31	1,566.20	5.42	364,257.34	600,776.01
8,239.00	89.80	92.30	-3,924.17	6,831.17	-92.16	1,657.21	1,659.19	0.78	364,253.04	600,868.91
8,334.00	89.10	91.50	-3,925.09	6,832.09	-95.31	1,752.15	1,754.18	1.12	364,249.89	600,963.85
8,428.00	88.00	90.50	-3,927.46	6,834.46	-96.95	1,846.10	1,848.14	1.58	364,248.25	601,057.80
8,521.00	88.10	90.30	-3,930.63	6,837.63	-97.60	1,939.05	1,941.07	0.24	364,247.80	601,150.74
8,615.00	87.90	89.30	-3,933.91	6,840.91	-97.27	2,032.99	2,034.96	1.08	364,247.93	601,244.68
8,708.00	88.00	89.30	-3,937.24	6,844.24	-96.14	2,125.92	2,127.82	0.11	364,249.06	601,337.62
8,802.00	88.10	89.70	-3,940.43	6,847.43	-95.32	2,219.86	2,221.70	0.44	364,249.88	601,431.56



Phoenix Technologies Phoenix Technology Surveys Report

Company: OGX Resources
Project: Eddy County, New Mexico
Site: Sidewinder #1H
Well: Job # 110354
Wellbore: Wellbore #1
Design: Wellbore #1

Local Co-ordinate Reference: Well Job # 110354
NAD Reference: WELL @ 2907.00R (RKB = 18')
MD Reference: WELL @ 2907.00R (RKB = 18')
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: GCR3

MP (ft)	Inc (°)	Az (azimuth) (°)	TV/DSS (ft)	MP (ft)	N/S (ft)	EW (ft)	V-Seg (ft)	Depth (ft/100ft)	Northings (ft)	Easting (ft)
8,895.00	87.80	89.30	-3,943.76	6,850.76	-94.50	2,312.80	2,314.57	0.54	364,250.70	601,524.50
8,989.00	86.90	91.00	-3,948.11	6,855.11	-94.75	2,406.70	2,408.43	2.04	364,250.45	601,618.39
9,083.00	88.90	92.20	-3,951.55	6,858.55	-97.37	2,500.59	2,502.36	2.48	364,247.83	601,712.28
9,177.00	88.40	91.10	-3,953.77	6,860.77	-100.08	2,594.52	2,596.34	1.29	364,245.12	601,806.22
9,296.00	89.30	92.00	-3,956.16	6,863.16	-103.30	2,713.45	2,715.31	1.07	364,241.90	601,925.15
9,390.00	89.40	91.40	-3,957.22	6,864.22	-106.09	2,807.40	2,809.30	0.65	364,239.11	602,019.10
9,483.00	89.70	91.20	-3,957.95	6,864.95	-108.20	2,900.38	2,902.30	0.39	364,237.00	602,112.07
9,577.00	89.50	90.90	-3,958.61	6,865.61	-109.92	2,994.36	2,996.29	0.38	364,235.28	602,206.05
9,670.00	89.90	91.40	-3,959.10	6,866.10	-111.78	3,087.34	3,089.28	0.69	364,233.42	602,299.03
9,764.00	88.60	91.90	-3,960.33	6,867.33	-114.49	3,181.29	3,183.27	1.48	364,230.71	602,392.98
9,858.00	88.40	91.10	-3,962.79	6,869.79	-116.95	3,275.22	3,277.24	0.88	364,228.25	602,486.92
9,952.00	88.70	92.20	-3,965.16	6,872.16	-119.66	3,369.15	3,371.21	1.21	364,225.54	602,580.85
10,045.00	88.90	90.70	-3,967.11	6,874.11	-122.01	3,462.10	3,464.19	1.63	364,223.19	602,673.79
10,139.00	87.40	89.90	-3,970.15	6,877.15	-122.50	3,556.05	3,558.11	1.81	364,222.70	602,767.74
10,233.00	87.10	89.30	-3,974.66	6,881.66	-121.85	3,649.94	3,651.94	0.71	364,223.35	602,861.63
10,327.00	86.40	89.20	-3,979.99	6,886.99	-120.62	3,743.78	3,745.70	0.75	364,224.58	602,955.47
10,419.00	86.10	89.10	-3,986.00	6,893.00	-119.26	3,835.57	3,837.42	0.34	364,225.94	603,047.26
10,513.00	86.10	91.00	-3,992.40	6,899.40	-119.34	3,929.35	3,931.16	2.02	364,225.86	603,141.04
10,607.00	90.10	92.80	-3,995.51	6,902.51	-122.45	4,023.22	4,025.08	4.67	364,222.75	603,234.91
10,700.00	90.80	92.80	-3,994.78	6,901.78	-127.00	4,116.11	4,118.06	0.75	364,218.20	603,327.80
10,889.00	90.40	92.80	-3,992.80	6,899.80	-136.23	4,304.87	4,307.01	0.21	364,208.97	603,516.56
10,961.00	90.30	92.80	-3,992.36	6,899.36	-139.75	4,376.78	4,379.00	0.14	364,205.45	603,588.47
11,009.00	90.30	92.80	-3,992.11	6,899.11	-142.09	4,424.72	4,426.99	0.00	364,203.11	603,636.42

Checked By: _____ Approved By: _____ Date: _____