

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-39427
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Mewbourne Oil Company		6. State Oil & Gas Lease No. VB-996, VB-1008
3. Address of Operator PO Box 5270, Hobbs, NM 88240		7. Lease Name or Unit Agreement Name Cooksey 36 State Com
4. Well Location Unit Letter <u>P</u> : <u>330'</u> feet from the <u>South</u> line and <u>500'</u> feet from the <u>East</u> line Section <u>36</u> Township <u>25S</u> Range <u>27E</u> NMPM <u>SE4/SE4</u> County <u>Eddy</u>		8. Well Number <u>2H</u>
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3085' - GL		9. OGRID Number <u>14744</u>
		10. Pool name or Wildcat Delaware River Bone Spring

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐


OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Mewbourne Oil Company has an approved APD on the above subject well. MOC would like to change the well name from Cooksey 36 State Com #2H to Cooksey 36 PA State Com #1H. Mewbourne Oil Company would also like to change proposed depth to 12,336' MD (Bone Springs 2nd Sands). 7" casing TD will be @ 8160' and cement volume will increase to 1200 sacks. Other casing, mud & BOP will not change. Please see new attached directional plan.

*prop code 39922
iff 5-1-13*

Provide C102 w/ new well name



Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Bradley Bishop TITLE Regulatory DATE 5-17-2013
Type or print name BRADLEY BISHOP E-mail address: _____ PHONE: 575-393-5905
For State Use Only
APPROVED BY: RDade TITLE Dist. At Spewison DATE 5/24/13
Conditions of Approval (if any): _____

Mewbourne Oil Co

Eddy County, New Mexico

Sec 36, T25S, R27E


Cooksey 36 PA State Com #1H

Wellbore #1

Plan: Design #2

DDC Well Planning Report

14 May, 2013



DDC

Well Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Cooksey 36 PA State Com #1H
Company:	Mewbourne Oil Co	TVD Reference:	WELL @ 3105.0usft (Patterson #75)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3105.0usft (Patterson #75)
Site:	Sec 36, T25S, R27E	North Reference:	Grid
Well:	Cooksey 36 PA State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #2		

Project	Eddy County, New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Sec 36, T25S, R27E		
Site Position:		Northing:	392,778.32 usft
From:	Map	Easting:	561,175.38 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 4' 46.954 N
		Longitude:	104° 8' 8.949 W
		Grid Convergence:	0.10 °

Well	Cooksey 36 PA State Com #1H		
Well Position	+N/-S	-0.2 usft	Northing: 392,778.08 usft
	+E/-W	-169.9 usft	Easting: 561,005.50 usft
Position Uncertainty	0.0 usft	Wellhead Elevation:	Latitude: 32° 4' 46.954 N
			Longitude: 104° 8' 10.923 W
			Ground Level: 3,085.0 usft

Wellbore	Wellbore #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF2010	4/18/2013	(°)
			7.61
			Dip Angle
			(°)
			59.91
			Field Strength
			(nT)
			48,285

Design	Design #2		
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth: 0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.0	0.0	0.0
			Direction
			(°)
			359.81

Plan Sections										
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)	
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)		
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
7,407.5	0.00	0.00	7,407.5	0.0	0.0	0.00	0.00	0.00	0.00	
8,157.5	90.00	359.81	7,885.0	477.5	-1.6	12.00	12.00	-0.03	359.81	
12,336.0	90.00	359.81	7,885.0	4,656.0	-15.7	0.00	0.00	0.00	0.00	PBHL Cooksey 36 Str

DDC

Well Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Cooksey 36 PA State Com #1H
Company:	Mewbourne Oil Co	TVD Reference:	WELL @ 3105.0usft (Patterson #75)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3105.0usft (Patterson #75)
Site:	Sec 36, T25S, R27E	North Reference:	Grid
Well:	Cooksey 36 PA State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #2		

Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00

DDC

Well Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Cooksey 36 PA State Com #1H
Company:	Mewbourne Oil Co	TVD Reference:	WELL @ 3105.0usft (Patterson #75)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3105.0usft (Patterson #75)
Site:	Sec 36, T25S, R27E	North Reference:	Grid
Well:	Cooksey 36 PA State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #2		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00
5,700.0	0.00	0.00	5,700.0	0.0	0.0	0.0	0.00	0.00	0.00
5,800.0	0.00	0.00	5,800.0	0.0	0.0	0.0	0.00	0.00	0.00
5,900.0	0.00	0.00	5,900.0	0.0	0.0	0.0	0.00	0.00	0.00
6,000.0	0.00	0.00	6,000.0	0.0	0.0	0.0	0.00	0.00	0.00
6,100.0	0.00	0.00	6,100.0	0.0	0.0	0.0	0.00	0.00	0.00
6,200.0	0.00	0.00	6,200.0	0.0	0.0	0.0	0.00	0.00	0.00
6,300.0	0.00	0.00	6,300.0	0.0	0.0	0.0	0.00	0.00	0.00
6,400.0	0.00	0.00	6,400.0	0.0	0.0	0.0	0.00	0.00	0.00
6,500.0	0.00	0.00	6,500.0	0.0	0.0	0.0	0.00	0.00	0.00
6,600.0	0.00	0.00	6,600.0	0.0	0.0	0.0	0.00	0.00	0.00
6,700.0	0.00	0.00	6,700.0	0.0	0.0	0.0	0.00	0.00	0.00
6,800.0	0.00	0.00	6,800.0	0.0	0.0	0.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,900.0	0.0	0.0	0.0	0.00	0.00	0.00
7,000.0	0.00	0.00	7,000.0	0.0	0.0	0.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,100.0	0.0	0.0	0.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,200.0	0.0	0.0	0.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,300.0	0.0	0.0	0.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,400.0	0.0	0.0	0.0	0.00	0.00	0.00
Build @ 12°/100'									
7,407.5	0.00	0.00	7,407.5	0.0	0.0	0.0	0.00	0.00	0.00
7,500.0	11.10	359.81	7,499.4	8.9	0.0	8.9	12.00	12.00	0.00
7,600.0	23.10	359.81	7,594.8	38.3	-0.1	38.3	12.00	12.00	0.00
7,700.0	35.10	359.81	7,682.0	86.8	-0.3	86.8	12.00	12.00	0.00
7,800.0	47.10	359.81	7,757.3	152.4	-0.5	152.4	12.00	12.00	0.00
7,900.0	59.10	359.81	7,817.2	232.3	-0.8	232.3	12.00	12.00	0.00
8,000.0	71.10	359.81	7,859.2	322.8	-1.1	322.8	12.00	12.00	0.00
8,100.0	83.10	359.81	7,881.5	420.1	-1.4	420.1	12.00	12.00	0.00
EOB @ 90° Inc / 359.81° Azm / 7885' TVD									
8,157.5	90.00	359.81	7,885.0	477.5	-1.6	477.5	12.00	12.00	0.00
8,200.0	90.00	359.81	7,885.0	520.0	-1.8	520.0	0.00	0.00	0.00
8,300.0	90.00	359.81	7,885.0	620.0	-2.1	620.0	0.00	0.00	0.00
8,400.0	90.00	359.81	7,885.0	720.0	-2.4	720.0	0.00	0.00	0.00
8,500.0	90.00	359.81	7,885.0	820.0	-2.8	820.0	0.00	0.00	0.00
8,600.0	90.00	359.81	7,885.0	920.0	-3.1	920.0	0.00	0.00	0.00
8,700.0	90.00	359.81	7,885.0	1,020.0	-3.4	1,020.0	0.00	0.00	0.00
8,800.0	90.00	359.81	7,885.0	1,120.0	-3.8	1,120.0	0.00	0.00	0.00
8,900.0	90.00	359.81	7,885.0	1,220.0	-4.1	1,220.0	0.00	0.00	0.00
9,000.0	90.00	359.81	7,885.0	1,320.0	-4.4	1,320.0	0.00	0.00	0.00
9,100.0	90.00	359.81	7,885.0	1,420.0	-4.8	1,420.0	0.00	0.00	0.00
9,200.0	90.00	359.81	7,885.0	1,520.0	-5.1	1,520.0	0.00	0.00	0.00
9,300.0	90.00	359.81	7,885.0	1,620.0	-5.5	1,620.0	0.00	0.00	0.00
9,400.0	90.00	359.81	7,885.0	1,720.0	-5.8	1,720.0	0.00	0.00	0.00
9,500.0	90.00	359.81	7,885.0	1,820.0	-6.1	1,820.0	0.00	0.00	0.00
9,600.0	90.00	359.81	7,885.0	1,920.0	-6.5	1,920.0	0.00	0.00	0.00
9,700.0	90.00	359.81	7,885.0	2,020.0	-6.8	2,020.0	0.00	0.00	0.00
9,800.0	90.00	359.81	7,885.0	2,120.0	-7.1	2,120.0	0.00	0.00	0.00
9,900.0	90.00	359.81	7,885.0	2,220.0	-7.5	2,220.0	0.00	0.00	0.00
10,000.0	90.00	359.81	7,885.0	2,320.0	-7.8	2,320.0	0.00	0.00	0.00
10,100.0	90.00	359.81	7,885.0	2,420.0	-8.1	2,420.0	0.00	0.00	0.00
10,200.0	90.00	359.81	7,885.0	2,520.0	-8.5	2,520.0	0.00	0.00	0.00

DDC

Well Planning Report

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well Cooksey 36 PA State Com #1H
Company:	Mewbourne Oil Co	TVD Reference:	WELL @ 3105.0usft (Patterson #75)
Project:	Eddy County, New Mexico	MD Reference:	WELL @ 3105.0usft (Patterson #75)
Site:	Sec 36 T25S R27E	North Reference:	Grid
Well:	Cooksey 36 PA State Com #1H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Wellbore #1		
Design:	Design #2		



Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
10,300.0	90.00	359.81	7,885.0	2,619.9	-8.8	2,620.0	0.00	0.00	0.00	
10,400.0	90.00	359.81	7,885.0	2,719.9	-9.2	2,720.0	0.00	0.00	0.00	
10,500.0	90.00	359.81	7,885.0	2,819.9	-9.5	2,820.0	0.00	0.00	0.00	
10,600.0	90.00	359.81	7,885.0	2,919.9	-9.8	2,920.0	0.00	0.00	0.00	
10,700.0	90.00	359.81	7,885.0	3,019.9	-10.2	3,020.0	0.00	0.00	0.00	
10,800.0	90.00	359.81	7,885.0	3,119.9	-10.5	3,120.0	0.00	0.00	0.00	
10,900.0	90.00	359.81	7,885.0	3,219.9	-10.8	3,220.0	0.00	0.00	0.00	
11,000.0	90.00	359.81	7,885.0	3,319.9	-11.2	3,320.0	0.00	0.00	0.00	
11,100.0	90.00	359.81	7,885.0	3,419.9	-11.5	3,420.0	0.00	0.00	0.00	
11,200.0	90.00	359.81	7,885.0	3,519.9	-11.8	3,520.0	0.00	0.00	0.00	
11,300.0	90.00	359.81	7,885.0	3,619.9	-12.2	3,620.0	0.00	0.00	0.00	
11,400.0	90.00	359.81	7,885.0	3,719.9	-12.5	3,720.0	0.00	0.00	0.00	
11,500.0	90.00	359.81	7,885.0	3,819.9	-12.9	3,820.0	0.00	0.00	0.00	
11,600.0	90.00	359.81	7,885.0	3,919.9	-13.2	3,920.0	0.00	0.00	0.00	
11,700.0	90.00	359.81	7,885.0	4,019.9	-13.5	4,020.0	0.00	0.00	0.00	
11,800.0	90.00	359.81	7,885.0	4,119.9	-13.9	4,120.0	0.00	0.00	0.00	
11,900.0	90.00	359.81	7,885.0	4,219.9	-14.2	4,220.0	0.00	0.00	0.00	
12,000.0	90.00	359.81	7,885.0	4,319.9	-14.5	4,320.0	0.00	0.00	0.00	
12,100.0	90.00	359.81	7,885.0	4,419.9	-14.9	4,420.0	0.00	0.00	0.00	
12,200.0	90.00	359.81	7,885.0	4,519.9	-15.2	4,520.0	0.00	0.00	0.00	
12,300.0	90.00	359.81	7,885.0	4,619.9	-15.5	4,620.0	0.00	0.00	0.00	
TD @ 12336' MD / 7885' TVD										
12,336.0	90.00	359.81	7,885.0	4,656.0	-15.7	4,656.0	0.00	0.00	0.00	

Design Targets										
Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
hit/miss target										
- Shape										
PBHL Cooksey 36 State	0.00	0.01	7,885.0	4,656.0	-15.7	397,434.05	560,989.83	32° 5' 33.033 N	104° 8' 11.007 W	
- plan hits target center										
- Point										

Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
7,407.5	7,407.5	0.0	0.0	Build @ 12°/100'	
8,157.5	7,885.0	477.5	-1.6	EOB @ 90° Inc / 359.81° Azm / 7885' TVD	
12,336.0	7,885.0	4,656.0	-15.7	TD @ 12336' MD / 7885' TVD	

Mewbourne Oil Company

Eddy County, New Mexico
Cooksey 36 PA State Com #1H
Quote 130359
Design #2

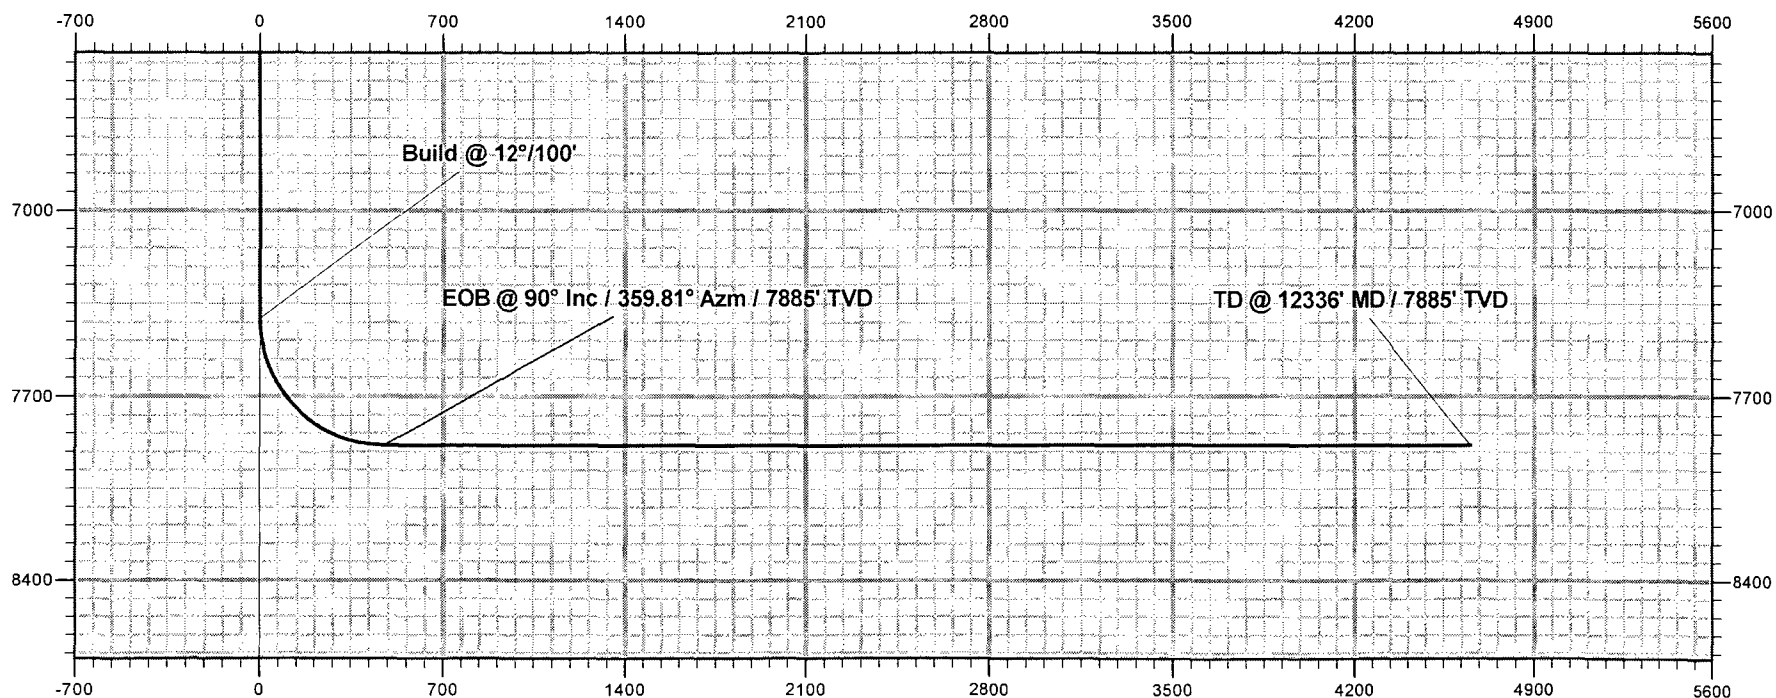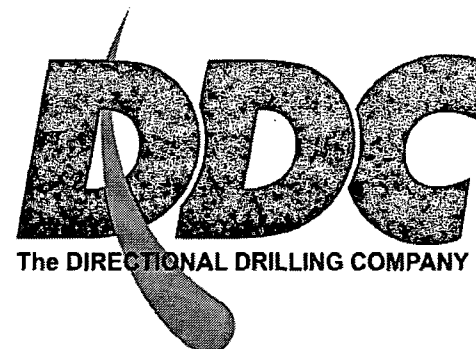

Vertical Section at 359.81° (700 usft/in)

Mewbourne Oil Company

Eddy County, New Mexico
Cooksey 36 PA State Com #1H
Quote 130359
Design #2

