

**NM OIL CONSERVATION
ARTESIA DISTRICT**

MAR 19 2019

RECEIVED



**PERCUSSION
PETROLEUM
LLC**

Percussion Petroleum, LLC

Eddy County, NM

Rose

#8H

OH

30-015 45805

Plan: Plan #2

Standard Plan With Toolface

13 March, 2019



Wellbenders
Standard Plan With Toolface

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Project	Eddy County, NM		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		Rose									
Site Position:		Northing:		611,332.70 usft		Latitude:		32.680563			
From:		Map		Easting:		512,404.20 usft		Longitude:		-104.427371	
Position Uncertainty:		0.00 usft		Slot Radius:		13.200 in		Grid Convergence:		-0.051 °	

Well		#8H				
Well Position	+N-S	0.00 usft	Northing:	611,571.90 usft	Latitude:	32.681221
	+E-W	0.00 usft	Easting:	512,600.00 usft	Longitude:	-104.426736
Position Uncertainty	0.00 usft	Wellhead Elevation:	usft	Ground Level:	3,377.00 usft	

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	3/11/2019	7.198	60.322	47,938.67301342

Design	Plan #2			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	270.31

Survey Tool Program		Date 3/13/2019		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	9,324.20	Plan #2 (OH)	MWD+IGRF	OWSG MWD + IGRF or WMM



Wellbenders Standard Plan With Toolface

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000
Rose 8H: SHL (420' FNL & 901' FWL)											
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.000
350.00	3.00	196.45	349.98	-1.26	-0.37	0.36	6.00	6.00	0.00	0.00	196.454
400.00	6.00	196.45	399.82	-5.02	-1.48	1.45	6.00	6.00	0.00	0.00	0.000
450.00	9.00	196.45	449.38	-11.28	-3.33	3.27	6.00	6.00	0.00	0.00	0.000
476.24	10.57	196.45	475.24	-15.55	-4.59	4.51	6.00	6.00	0.00	0.00	0.000
500.00	10.57	196.45	498.60	-19.73	-5.83	5.72	0.00	0.00	0.00	0.00	0.000
600.00	10.57	196.45	596.90	-37.33	-11.03	10.82	0.00	0.00	0.00	0.00	0.000
700.00	10.57	196.45	695.20	-54.93	-16.22	15.93	0.00	0.00	0.00	0.00	0.000
800.00	10.57	196.45	793.50	-72.53	-21.42	21.03	0.00	0.00	0.00	0.00	0.000
900.00	10.57	196.45	891.80	-90.13	-26.62	26.13	0.00	0.00	0.00	0.00	0.000
1,000.00	10.57	196.45	990.11	-107.73	-31.82	31.23	0.00	0.00	0.00	0.00	0.000
1,100.00	10.57	196.45	1,088.41	-125.33	-37.02	36.34	0.00	0.00	0.00	0.00	0.000
1,200.00	10.57	196.45	1,186.71	-142.93	-42.21	41.44	0.00	0.00	0.00	0.00	0.000
1,300.00	10.57	196.45	1,285.01	-160.53	-47.41	46.54	0.00	0.00	0.00	0.00	0.000
1,400.00	10.57	196.45	1,383.31	-178.13	-52.61	51.64	0.00	0.00	0.00	0.00	0.000
1,500.00	10.57	196.45	1,481.62	-195.73	-57.81	56.75	0.00	0.00	0.00	0.00	0.000
1,600.00	10.57	196.45	1,579.92	-213.33	-63.00	61.85	0.00	0.00	0.00	0.00	0.000
1,700.00	10.57	196.45	1,678.22	-230.93	-68.20	66.95	0.00	0.00	0.00	0.00	0.000
1,800.00	10.57	196.45	1,776.52	-248.53	-73.40	72.05	0.00	0.00	0.00	0.00	0.000
1,900.00	10.57	196.45	1,874.82	-266.13	-78.60	77.16	0.00	0.00	0.00	0.00	0.000
2,000.00	10.57	196.45	1,973.12	-283.73	-83.80	82.26	0.00	0.00	0.00	0.00	0.000
2,100.00	10.57	196.45	2,071.43	-301.33	-88.99	87.36	0.00	0.00	0.00	0.00	0.000
2,200.00	10.57	196.45	2,169.73	-318.93	-94.19	92.46	0.00	0.00	0.00	0.00	0.000



Wellbenders

Standard Plan With Toolface

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)
2,300.00	10.57	196.45	2,268.03	-336.53	-99.39	97.57	0.00	0.00	0.00	0.000
2,400.00	10.57	196.45	2,366.33	-354.13	-104.59	102.67	0.00	0.00	0.00	0.000
2,500.00	10.57	196.45	2,464.63	-371.73	-109.78	107.77	0.00	0.00	0.00	0.000
2,600.00	10.57	196.45	2,562.93	-389.33	-114.98	112.87	0.00	0.00	0.00	0.000
2,647.48	10.57	196.45	2,609.61	-397.69	-117.45	115.30	0.00	0.00	0.00	0.000
2,650.00	10.59	197.27	2,612.08	-398.13	-117.58	115.43	6.00	0.60	32.51	84.661
2,700.00	11.31	212.66	2,661.19	-406.64	-121.60	119.39	6.00	1.43	30.78	83.855
2,750.00	12.70	225.48	2,710.10	-414.63	-128.16	125.92	6.00	2.79	25.63	68.741
2,800.00	14.58	235.43	2,758.69	-422.05	-137.27	134.98	6.00	3.76	19.90	56.202
2,850.00	16.78	242.99	2,806.83	-428.91	-148.88	146.56	6.00	4.41	15.12	46.532
2,900.00	19.20	248.77	2,854.39	-435.16	-162.98	160.62	6.00	4.83	11.56	39.253
2,950.00	21.75	253.27	2,901.23	-440.81	-179.52	177.13	6.00	5.11	9.00	33.754
3,000.00	24.41	256.85	2,947.23	-445.83	-198.46	196.04	6.00	5.31	7.16	29.537
3,050.00	27.13	259.76	2,992.25	-450.21	-219.74	217.30	6.00	5.44	5.82	26.243
3,100.00	29.90	262.17	3,036.18	-453.94	-243.31	240.85	6.00	5.54	4.82	23.622
3,150.00	32.71	264.20	3,078.90	-457.00	-269.10	266.62	6.00	5.62	4.07	21.503
3,200.00	35.54	265.95	3,120.29	-459.39	-297.04	294.55	6.00	5.67	3.49	19.764
3,250.00	38.40	267.46	3,160.23	-461.11	-327.06	324.56	6.00	5.72	3.03	18.319
3,300.00	41.28	268.80	3,198.62	-462.14	-359.07	356.57	6.00	5.75	2.67	17.107
3,350.00	44.17	269.99	3,235.35	-462.49	-392.99	390.48	6.00	5.78	2.38	16.079
3,364.40	45.00	270.31	3,245.60	-462.46	-403.09	400.58	6.00	5.79	2.23	15.203
3,400.00	45.00	270.31	3,270.78	-462.32	-428.27	425.76	0.00	0.00	0.00	0.000
3,500.00	45.00	270.31	3,341.49	-461.94	-498.98	496.47	0.00	0.00	0.00	0.000
3,600.00	45.00	270.31	3,412.20	-461.55	-569.69	567.18	0.00	0.00	0.00	0.000
3,614.40	45.00	270.31	3,422.38	-461.50	-579.87	577.36	0.00	0.00	0.00	0.000
3,650.00	48.58	270.31	3,446.76	-461.35	-605.81	603.30	10.00	10.00	0.00	0.000
3,700.00	53.56	270.31	3,478.17	-461.14	-644.68	642.18	10.00	10.00	0.00	0.000



Wellbenders

Standard Plan With Toolface

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)	
3,750.00	58.56	270.31	3,506.08	-460.91	-686.15	683.65	10.00	10.00	0.00	0.000	
3,800.00	63.56	270.31	3,530.27	-460.68	-729.89	727.39	10.00	10.00	0.00	0.000	
3,850.00	68.56	270.31	3,550.55	-460.43	-775.58	773.07	10.00	10.00	0.00	0.000	
3,900.00	73.56	270.31	3,566.77	-460.17	-822.85	820.35	10.00	10.00	0.00	0.000	
3,950.00	78.56	270.31	3,578.81	-459.90	-871.37	868.86	10.00	10.00	0.00	0.000	
4,000.00	83.56	270.31	3,586.58	-459.63	-920.74	918.24	10.00	10.00	0.00	0.000	
4,050.00	88.56	270.31	3,590.02	-459.36	-970.61	968.11	10.00	10.00	0.00	0.000	
4,079.40	91.50	270.31	3,590.00	-459.20	-1,000.00	997.50	10.00	10.00	0.00	0.000	
Rose 8H: FTP (870' FNL & 100' FEL)											
4,100.00	91.50	270.31	3,589.46	-459.09	-1,020.60	1,018.10	0.00	0.00	0.00	0.000	
4,200.00	91.50	270.31	3,586.84	-458.54	-1,120.56	1,118.06	0.00	0.00	0.00	0.000	
4,300.00	91.50	270.31	3,584.23	-458.00	-1,220.52	1,218.03	0.00	0.00	0.00	0.000	
4,400.00	91.50	270.31	3,581.61	-457.45	-1,320.49	1,317.99	0.00	0.00	0.00	0.000	
4,500.00	91.50	270.31	3,578.99	-456.90	-1,420.45	1,417.96	0.00	0.00	0.00	0.000	
4,600.00	91.50	270.31	3,576.37	-456.36	-1,520.42	1,517.93	0.00	0.00	0.00	0.000	
4,700.00	91.50	270.31	3,573.75	-455.81	-1,620.38	1,617.89	0.00	0.00	0.00	0.000	
4,800.00	91.50	270.31	3,571.14	-455.26	-1,720.35	1,717.86	0.00	0.00	0.00	0.000	
4,900.00	91.50	270.31	3,568.52	-454.72	-1,820.31	1,817.82	0.00	0.00	0.00	0.000	
5,000.00	91.50	270.31	3,565.90	-454.17	-1,920.27	1,917.79	0.00	0.00	0.00	0.000	
5,100.00	91.50	270.31	3,563.28	-453.63	-2,020.24	2,017.75	0.00	0.00	0.00	0.000	
5,200.00	91.50	270.31	3,560.67	-453.08	-2,120.20	2,117.72	0.00	0.00	0.00	0.000	
5,300.00	91.50	270.31	3,558.05	-452.53	-2,220.17	2,217.69	0.00	0.00	0.00	0.000	
5,400.00	91.50	270.31	3,555.43	-451.99	-2,320.13	2,317.65	0.00	0.00	0.00	0.000	
5,500.00	91.50	270.31	3,552.81	-451.44	-2,420.10	2,417.62	0.00	0.00	0.00	0.000	
5,600.00	91.50	270.31	3,550.20	-450.90	-2,520.06	2,517.58	0.00	0.00	0.00	0.000	
5,700.00	91.50	270.31	3,547.58	-450.35	-2,620.02	2,617.55	0.00	0.00	0.00	0.000	
5,800.00	91.50	270.31	3,544.96	-449.80	-2,719.99	2,717.51	0.00	0.00	0.00	0.000	



Wellbenders

Standard Plan With Toolface

Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Bulld (°/100ft)	Turn (°/100ft)	TFace (°)	
5,900.00	91.50	270.31	3,542.34	-449.26	-2,819.95	2,817.48	0.00	0.00	0.00	0.000	
6,000.00	91.50	270.31	3,539.72	-448.71	-2,919.92	2,917.45	0.00	0.00	0.00	0.000	
6,100.00	91.50	270.31	3,537.11	-448.17	-3,019.88	3,017.41	0.00	0.00	0.00	0.000	
6,200.00	91.50	270.31	3,534.49	-447.62	-3,119.85	3,117.38	0.00	0.00	0.00	0.000	
6,300.00	91.50	270.31	3,531.87	-447.07	-3,219.81	3,217.34	0.00	0.00	0.00	0.000	
6,400.00	91.50	270.31	3,529.25	-446.53	-3,319.77	3,317.31	0.00	0.00	0.00	0.000	
6,500.00	91.50	270.31	3,526.64	-445.98	-3,419.74	3,417.27	0.00	0.00	0.00	0.000	
6,582.75	91.50	270.31	3,524.47	-445.53	-3,502.46	3,500.00	0.00	0.00	0.00	0.000	
Rose 8H: LTGT											
6,607.75	92.00	270.31	3,523.71	-445.39	-3,527.45	3,524.99	2.00	2.00	0.00	0.000	
6,700.00	92.00	270.31	3,520.49	-444.89	-3,619.64	3,617.18	0.00	0.00	0.00	0.000	
6,800.00	92.00	270.31	3,517.00	-444.34	-3,719.58	3,717.12	0.00	0.00	0.00	0.000	
6,900.00	92.00	270.31	3,513.51	-443.80	-3,819.51	3,817.06	0.00	0.00	0.00	0.000	
7,000.00	92.00	270.31	3,510.02	-443.25	-3,919.45	3,917.00	0.00	0.00	0.00	0.000	
7,100.00	92.00	270.31	3,506.53	-442.71	-4,019.39	4,016.93	0.00	0.00	0.00	0.000	
7,200.00	92.00	270.31	3,503.04	-442.16	-4,119.33	4,116.87	0.00	0.00	0.00	0.000	
7,300.00	92.00	270.31	3,499.55	-441.61	-4,219.26	4,216.81	0.00	0.00	0.00	0.000	
7,400.00	92.00	270.31	3,496.06	-441.07	-4,319.20	4,316.75	0.00	0.00	0.00	0.000	
7,500.00	92.00	270.31	3,492.57	-440.52	-4,419.14	4,416.69	0.00	0.00	0.00	0.000	
7,600.00	92.00	270.31	3,489.08	-439.98	-4,519.08	4,516.63	0.00	0.00	0.00	0.000	
7,700.00	92.00	270.31	3,485.59	-439.43	-4,619.01	4,616.57	0.00	0.00	0.00	0.000	
7,800.00	92.00	270.31	3,482.10	-438.88	-4,718.95	4,716.51	0.00	0.00	0.00	0.000	
7,900.00	92.00	270.31	3,478.61	-438.34	-4,818.89	4,816.45	0.00	0.00	0.00	0.000	
8,000.00	92.00	270.31	3,475.12	-437.79	-4,918.83	4,916.39	0.00	0.00	0.00	0.000	
8,100.00	92.00	270.31	3,471.63	-437.25	-5,018.76	5,016.33	0.00	0.00	0.00	0.000	
8,200.00	92.00	270.31	3,468.14	-436.70	-5,118.70	5,116.26	0.00	0.00	0.00	0.000	
8,300.00	92.00	270.31	3,464.65	-436.15	-5,218.64	5,216.20	0.00	0.00	0.00	0.000	



Wellbenders
Standard Plan With Toolface


Company:	Percussion Petroleum, LLC	Local Co-ordinate Reference:	Well #8H
Project:	Eddy County, NM	TVD Reference:	RKB=16' @ 3393.00usft (Akita)
Site:	Rose	MD Reference:	RKB=16' @ 3393.00usft (Akita)
Well:	#8H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Plan #2	Database:	WBDS_SQL_2

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100ft)	Build (°/100ft)	Turn (°/100ft)	TFace (°)	
8,400.00	92.00	270.31	3,461.16	-435.61	-5,318.58	5,316.14	0.00	0.00	0.00	0.000	
8,500.00	92.00	270.31	3,457.67	-435.06	-5,418.52	5,416.08	0.00	0.00	0.00	0.000	
8,600.00	92.00	270.31	3,454.18	-434.52	-5,518.45	5,516.02	0.00	0.00	0.00	0.000	
8,700.00	92.00	270.31	3,450.69	-433.97	-5,618.39	5,615.96	0.00	0.00	0.00	0.000	
8,800.00	92.00	270.31	3,447.20	-433.42	-5,718.33	5,715.90	0.00	0.00	0.00	0.000	
8,900.00	92.00	270.31	3,443.71	-432.88	-5,818.27	5,815.84	0.00	0.00	0.00	0.000	
9,000.00	92.00	270.31	3,440.22	-432.33	-5,918.20	5,915.78	0.00	0.00	0.00	0.000	
9,100.00	92.00	270.31	3,436.73	-431.79	-6,018.14	6,015.72	0.00	0.00	0.00	0.000	
9,200.00	92.00	270.31	3,433.24	-431.24	-6,118.08	6,115.66	0.00	0.00	0.00	0.000	
9,244.15	92.00	270.31	3,431.70	-431.00	-6,162.20	6,159.78	0.00	0.00	0.00	0.000	
Rose 8H: LTP (870' FNL & 100' FWL)											
9,300.00	92.00	270.31	3,429.75	-430.70	-6,218.02	6,215.59	0.00	0.00	0.00	0.000	
9,324.20	92.00	270.31	3,428.91	-430.56	-6,242.20	6,239.78	0.00	0.00	0.00	0.000	
Rose 8H: PBHL (870' FNL & 20' FWL)											

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



Company: Percussion Petroleum, LLC
Project: Eddy County, NM
Site: Rose
Well: RBH
Wellbore: OH
Rig: Akita
Design: Plan #2 / 8:08, March 13 2019

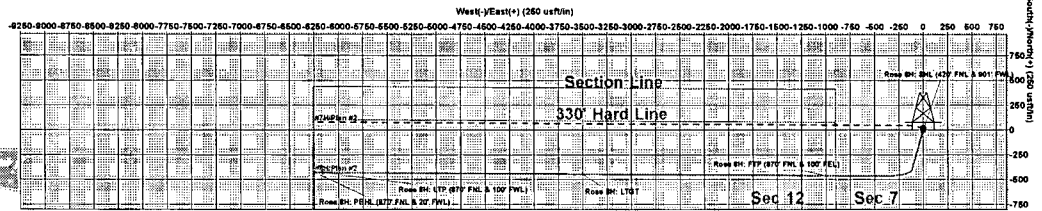

DESIGN TARGET DETAILS

Name	TVD	+N-S	+E-W	Northing	Eastng	Latitude	Longitude
Rose BH: SHL (420' FNL & 90' FWL)	0.00	0.00	0.00	81157.90	51600.00	32.881231	-104.428738
Rose BH: PHL (870' FNL & 20' FWL)	3428.81	-430.80	-8242.20	81141.30	50637.80	32.880020	-104.447022
Rose BH: LTP (870' FNL & 100' FWL)	3431.76	-431.80	-8162.20	81140.30	50643.80	32.880020	-104.446892
Rose BH: LTO	3524.47	-445.53	-8052.44	81138.17	50907.54	32.879857	-104.438118
Rose BH: FTP (870' FNL & 100' FWL)	3590.36	-459.20	-1000.00	81112.70	51100.00	32.879554	-104.429884

TOTAL CORRECTION
To convert a Magnetic Direction to a Grid Direction, Add 7.249°

WELL DETAILS: RBH

RWB-18 @ 3182.00usd (AMH)						
3377.00						
+N-S	+E-W	Northing	Eastng	Latitude	Longitude	
0.00	0.00	81157.90	51600.00	32.881231	-104.428738	

SECTION DETAILS


Sec	MD	Inc	App	TVD	+N-S	+E-W	Diag	Vbact
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2	300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00
3	478.24	10.57	196.45	478.24	15.55	-4.58	0.00	4.51
4	2647.48	18.57	196.45	3008.81	-387.03	-117.45	0.00	115.30
5	3284.40	45.86	270.31	3245.88	-482.48	-403.09	0.00	488.58
6	3614.40	45.86	270.31	3422.38	-481.50	-379.87	0.00	577.26
7	4079.60	91.58	270.31	3580.50	-459.20	-1000.00	10.00	987.50
8	6882.75	91.58	270.31	3524.47	-445.53	-3507.48	0.00	3500.00
9	6887.75	92.00	270.31	3523.71	-445.20	-3507.45	2.00	3514.99
10	8244.10	92.00	270.31	3428.70	-431.80	-4162.20	0.00	4169.79
11	8224.28	92.00	270.31	3428.91	-430.54	-4162.20	0.00	4239.79





Geographic Field
Strength: 47035.7 uT
Clock Angle: 85.37°
Date: 3/11/2019
Model: G2012013

Geoid: System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico System Zone
System Datum: Mean Sea Level

PROJECT DETAILS: Eddy County, NM

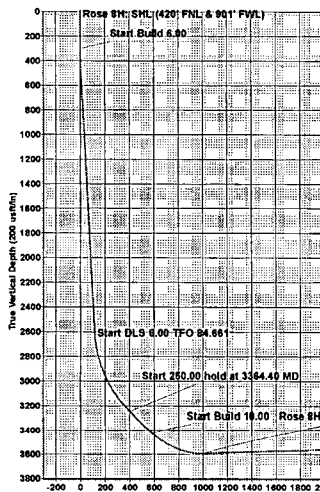

Vertical Section at 270.31° (200 us/ft)

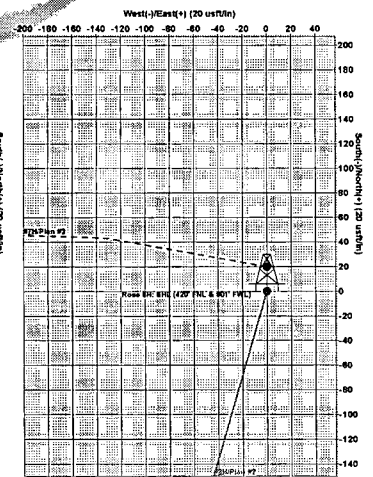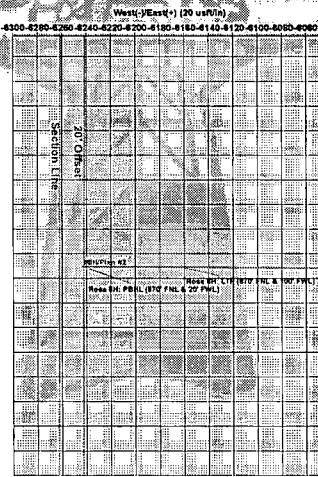

Disclaimer:
All data is subject to change without notice.
This document is for informational purposes only.
It is not to be used for any other purpose.
Without the written consent of the company.

Plan: Plan #2 (RBH/OH) Akita

Created By: Derek Stephens Date: 8:08, March 13 2019