

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

OCD Received
Date: 3/31/2020

Form C-104
Revised August 1, 2011

Submit one copy to appropriate District Office

☐ AMENDED REPORT

I. REQUEST FOR ALLOWABLE AND AUTHORIZATION TO TRANSPORT

¹ Operator name and Address TAP ROCK OPERATING, LLC 602 PARK POINT DRIVE, SUITE 200 GOLDEN, CO 80401		² OGRID Number 372043	
		³ Reason for Filing Code/ Effective Date RT	
⁴ API Number 30 - 0 15-46220	⁵ Pool Name PURPLE SAGE, WOLFCAMP		⁶ Pool Code 98220
⁷ Property Code 326031	⁸ Property Name MONEY GRAHAM FED COM		⁹ Well Number 218H

II. ¹⁰ Surface Location

UI or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South Line	Feet from the	East/West line	County
H	32	26S	29E	4	250	SOUTH	854	EAST	EDDY

¹¹ Bottom Hole Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	29	26S	29E		211	NORTH	592	EAST	EDDY
¹² Lse Code F	¹³ Producing Method Code F		¹⁴ Gas Connection Date		¹⁵ C-129 Permit Number		¹⁶ C-129 Effective Date		¹⁷ C-129 Expiration Date

III. Oil and Gas Transporters

¹⁸ Transporter OGRID	¹⁹ Transporter Name and Address		²⁰ O/G/W
373554	SALT CREEK MIDSTREAM, LLC 20329 STATE HIGHWAY 249 HOUSTON, TX U.S.A 77070		O
373554	SALT CREEK MIDSTREAM, LLC 20329 STATE HIGHWAY 249 HOUSTON, TX U.S.A 77070		G

IV. Well Completion Data

²¹ Spud Date 9/24/19	²² Ready Date 2/22/2020	²³ TD 17046'	²⁴ PBTD 16940'	²⁵ Perforations 9555'-16833'	²⁶ DHC, MC	
²⁷ Hole Size		²⁸ Casing & Tubing Size		²⁹ Depth Set		³⁰ Sacks Cement
17 1/2"		13 3/8"		597'		650
12 1/4"		9 5/8"		2909'		1026
8 3/4"		7 5/8"		9267'		711
6 3/4		5 1/2", 5"		8815', 17026'		981

V. Well Test Data

³¹ Date New Oil	³² Gas Delivery Date	³³ Test Date	³⁴ Test Length	³⁵ Tbg. Pressure	³⁶ Csg. Pressure
³⁷ Choke Size	³⁸ Oil	³⁹ Water	⁴⁰ Gas		⁴¹ Test Method
⁴² I hereby certify that the rules of the Oil Conservation Division have been complied with and that the information given above is true and complete to the best of my knowledge and belief. Signature: 			OIL CONSERVATION DIVISION		
Printed name: Bill Ramsey			Approved by: DENIED		
Title: Regulatory Analyst			Title:		
E-mail Address: bramsey@taprk.com			Approval Date:		
Date: 3/18/2020			Phone: 720-360-4028		
RT EXPIRED: 5/22/2020					

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

FORM C-102

Revised August 1, 2011

Submit one copy to appropriate

District Office

☐ AMENDED REPORT
AS-DRILLED

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-46220	² Pool Code 98220	³ Pool Name PURPLE SAGE, WOLFAMP (GAS)
⁴ Property Code 326031	⁵ Property Name MONEY GRAM FED COM	⁶ Well Number 218H
⁷ OGRID No. 372043	⁸ Operator Name TAP ROCK OPERATING, LLC.	⁹ Elevation 2866'

¹⁰Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	32	26-S	29-E	-	250'	SOUTH	854'	EAST	EDDY

¹¹Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	29	26-S	29-E	-	211'	NORTH	592'	EAST	EDDY

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
-------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

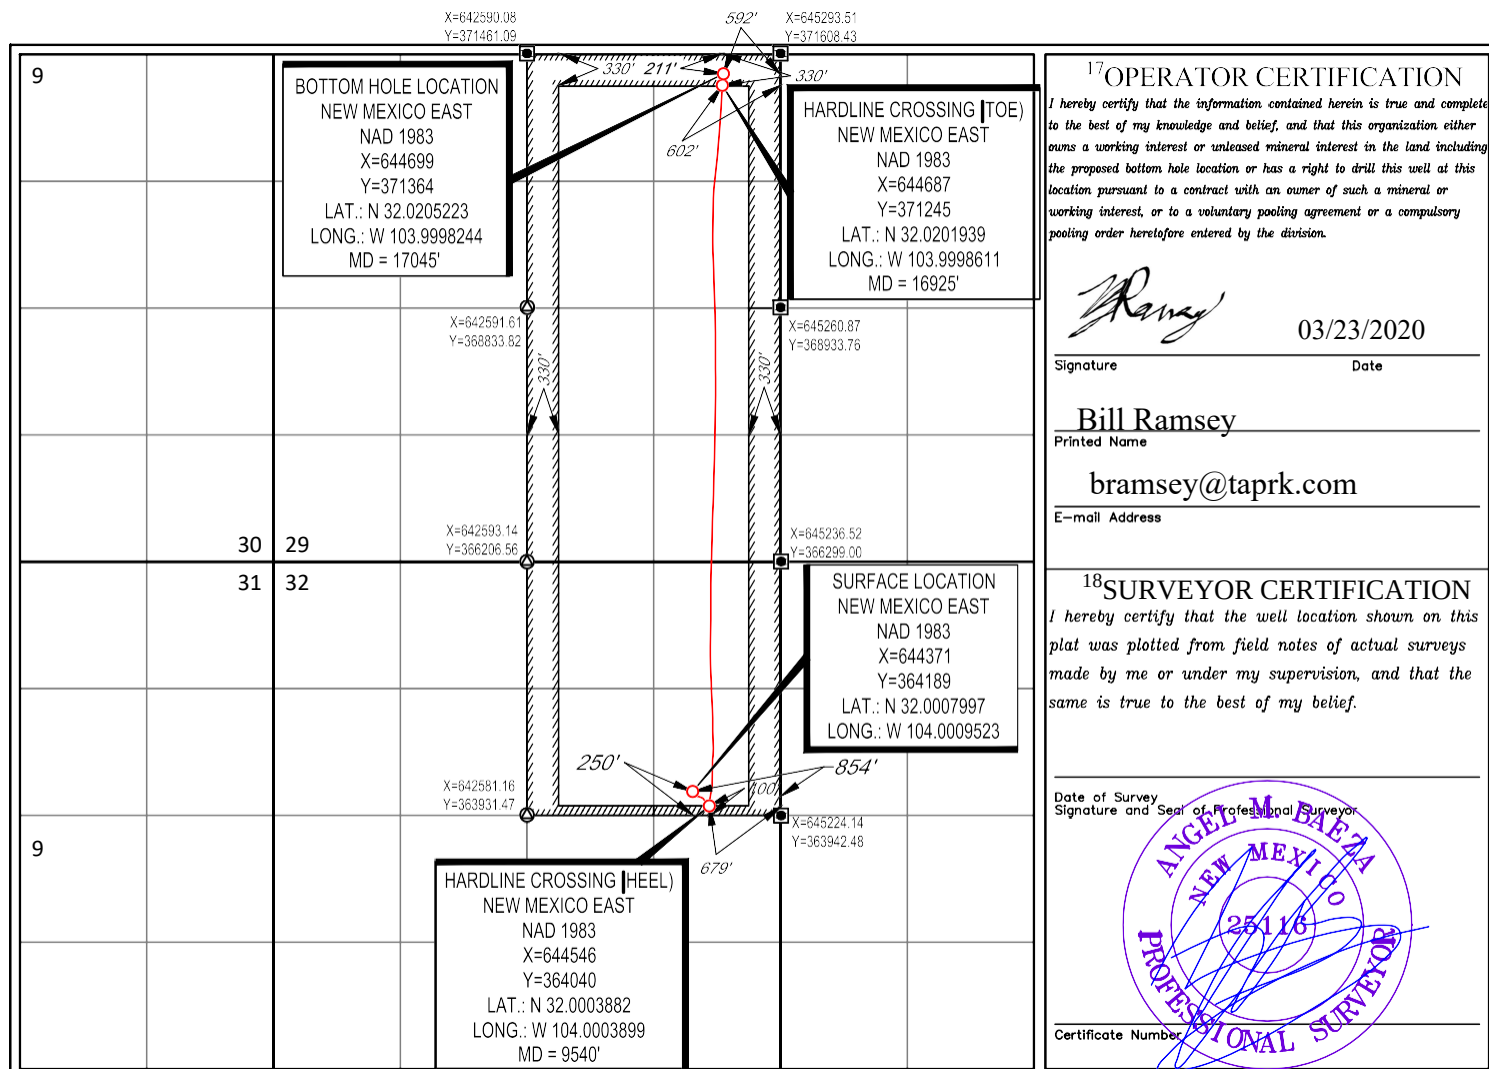



Tap Rock Resources, LLC

**Eddy County, NM (NAD 83 NME)
(Money Graham) Sec-32_T-26-S_R-29-E
Money Graham Fed Com #218H**

OWB

Design: AWB

Standard Survey Report

26 November, 2019





Operator: Taprock Resources LLC
Well Name: Money Graham Fed Com #218H
County: Eddy
State: New Mexico
Rig Name: H&P 245
API Number: 30-015-46220

Intrepid Directional Drilling Specialists certifies that the surveys performed on the above referenced well are true and correct MWD surveys, data provided as follows:

Surveyor: Intrepid Directional Drilling Specialists
Survey Depths: 26' MD – 16973' MD
Projection to Bit: 17046' MD
Dates Performed: 11/15/2019 – 11/27/2019
Type of Survey: MWD

Sincerely,

A handwritten signature in blue ink, appearing to read "Jim", with a stylized flourish at the end.

James Burleson
Vice President of MWD Operations
Intrepid Directional Drilling Specialists



Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Project	Eddy County, NM (NAD 83 NME)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site		(Money Graham) Sec-32_T-26-S_R-29-E				
Site Position:		Northing:	364,259.00 usft	Latitude:	32° 0' 3.571 N	
From:	Map	Easting:	644,466.00 usft	Longitude:	104° 0' 2.323 W	
Position Uncertainty:		0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.18 °

Well	Money Graham Fed Com #218H					
Well Position	+N/-S	0.0 usft	Northing:	364,189.00 usft	Latitude:	32° 0' 2.881 N
	+E/-W	0.0 usft	Easting:	644,371.00 usft	Longitude:	104° 0' 3.428 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	usft	Ground Level:	2,866.0 usft

Wellbore	OWB				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF2015	10/13/19	6.88	59.76	47,526.27133367

Design	AWB			
Audit Notes:				
Version:	1.0	Phase:	ACTUAL	Tie On Depth:
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.0	0.0	0.0	0.52

Survey Program	Date	11/26/19		
From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
26.0	17,046.0	Invictus Surface Svys (OWB)	MWD	OWSG MWD - Standard

Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
26.0	0.00	359.82	26.0	0.0	0.0	0.0	0.00	0.00	0.00
117.0	0.40	162.76	117.0	-0.3	0.1	-0.3	0.44	0.44	0.00
183.0	0.40	162.76	183.0	-0.7	0.2	-0.7	0.00	0.00	0.00
232.0	0.60	91.76	232.0	-0.9	0.5	-0.9	1.23	0.41	-144.90
326.0	0.80	150.76	326.0	-1.5	1.4	-1.5	0.76	0.21	62.77
366.0	0.70	53.76	366.0	-1.6	1.7	-1.6	2.81	-0.25	-242.50
421.0	0.70	125.76	421.0	-1.6	2.2	-1.6	1.50	0.00	130.91
454.0	0.30	190.76	454.0	-1.8	2.4	-1.8	1.92	-1.21	196.97
461.0	0.30	69.76	461.0	-1.8	2.4	-1.8	7.46	0.00	-1,728.57

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
507.0	0.54	185.47	507.0	-2.0	2.5	-2.0	1.57	0.52	251.45
Rustler Anhydrite									
518.0	0.70	190.76	518.0	-2.1	2.5	-2.1	1.57	1.48	48.15
555.0	1.10	98.76	555.0	-2.4	2.8	-2.4	3.58	1.08	-248.65
579.0	0.90	81.76	579.0	-2.4	3.2	-2.4	1.48	-0.83	-70.83
682.0	1.13	101.54	682.0	-2.5	5.0	-2.4	0.40	0.22	19.20
Top Salt									
703.0	1.19	104.53	703.0	-2.6	5.4	-2.5	0.40	0.28	14.24
796.0	1.76	121.50	795.9	-3.6	7.5	-3.5	0.77	0.61	18.25
889.0	3.69	126.77	888.8	-6.1	11.2	-6.0	2.09	2.08	5.67
983.0	4.66	131.69	982.6	-10.4	16.4	-10.3	1.10	1.03	5.23
1,076.0	4.26	137.32	1,075.3	-15.5	21.6	-15.3	0.64	-0.43	6.05
1,161.0	4.13	141.45	1,160.1	-20.2	25.6	-20.0	0.39	-0.15	4.86
1,255.0	3.52	141.80	1,253.8	-25.1	29.5	-24.9	0.65	-0.65	0.37
1,349.0	2.90	144.79	1,347.7	-29.3	32.7	-29.0	0.68	-0.66	3.18
1,442.0	2.20	148.74	1,440.6	-32.8	35.0	-32.5	0.78	-0.75	4.25
1,535.0	1.89	152.96	1,533.5	-35.7	36.6	-35.3	0.37	-0.33	4.54
1,629.0	2.02	155.33	1,627.5	-38.6	38.0	-38.2	0.16	0.14	2.52
1,722.0	1.67	154.01	1,720.4	-41.3	39.3	-40.9	0.38	-0.38	-1.42
1,816.0	1.41	149.97	1,814.4	-43.5	40.5	-43.1	0.30	-0.28	-4.30
1,910.0	1.45	146.63	1,908.4	-45.5	41.7	-45.1	0.10	0.04	-3.55
2,004.0	1.14	154.72	2,002.4	-47.3	42.7	-47.0	0.38	-0.33	8.61
2,098.0	1.63	118.77	2,096.3	-48.8	44.3	-48.4	1.04	0.52	-38.24
2,192.0	3.25	95.83	2,190.2	-49.7	48.1	-49.3	1.98	1.72	-24.40
2,286.0	3.34	101.54	2,284.1	-50.6	53.5	-50.1	0.36	0.10	6.07
2,380.0	4.40	99.17	2,377.9	-51.7	59.7	-51.1	1.14	1.13	-2.52
2,394.2	4.63	98.78	2,392.0	-51.9	60.8	-51.3	1.64	1.62	-2.75
Base Salt									
2,474.0	5.93	97.15	2,471.5	-52.9	68.1	-52.2	1.64	1.63	-2.04
2,568.0	5.98	105.15	2,565.0	-54.7	77.6	-54.0	0.88	0.05	8.51
2,662.0	5.05	117.54	2,658.5	-57.9	86.0	-57.2	1.60	-0.99	13.18
2,735.7	4.67	113.24	2,732.0	-60.6	91.7	-59.8	0.72	-0.52	-5.83
Delaware Mountain Gp									
2,755.0	4.57	112.00	2,751.2	-61.2	93.1	-60.4	0.72	-0.50	-6.44
2,849.0	4.04	112.27	2,845.0	-63.9	99.6	-63.0	0.56	-0.56	0.29
2,851.0	4.03	112.27	2,847.0	-63.9	99.8	-63.0	0.27	-0.27	0.00
Bell Canyon - Lamar									
2,891.1	3.93	112.27	2,887.0	-65.0	102.3	-64.1	0.27	-0.27	0.00
Ramsey Sand									
2,930.0	3.82	112.27	2,925.8	-66.0	104.8	-65.0	0.27	-0.27	0.00
3,024.0	4.00	117.36	3,019.5	-68.7	110.6	-67.7	0.42	0.19	5.41
3,117.0	3.25	127.82	3,112.4	-71.8	115.5	-70.7	1.07	-0.81	11.25
3,211.0	2.95	143.64	3,206.2	-75.4	119.1	-74.3	0.96	-0.32	16.83
3,305.0	2.81	143.47	3,300.1	-79.2	121.9	-78.1	0.15	-0.15	-0.18
3,399.0	2.77	140.92	3,394.0	-82.8	124.7	-81.6	0.14	-0.04	-2.71

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
3,493.0	2.90	139.86	3,487.9	-86.4	127.7	-85.2	0.15	0.14	-1.13
3,587.0	2.68	146.28	3,581.8	-90.0	130.4	-88.8	0.41	-0.23	6.83
3,681.0	2.46	144.61	3,675.7	-93.5	132.8	-92.3	0.25	-0.23	-1.78
3,774.0	2.33	140.83	3,768.6	-96.6	135.1	-95.3	0.22	-0.14	-4.06
3,867.5	2.29	140.57	3,862.0	-99.5	137.5	-98.2	0.04	-0.04	-0.28
Cherry Canyon									
3,868.0	2.29	140.57	3,862.5	-99.5	137.5	-98.3	0.05	-0.05	-0.32
3,962.0	2.42	143.91	3,956.4	-102.6	139.9	-101.3	0.20	0.14	3.55
4,056.0	2.20	146.54	4,050.4	-105.7	142.1	-104.4	0.26	-0.23	2.80
4,149.0	1.93	147.07	4,143.3	-108.5	143.9	-107.2	0.29	-0.29	0.57
4,244.0	1.98	150.50	4,238.2	-111.2	145.6	-109.9	0.13	0.05	3.61
4,338.0	1.98	156.48	4,332.2	-114.1	147.0	-112.8	0.22	0.00	6.36
4,432.0	1.85	158.23	4,426.1	-117.0	148.2	-115.7	0.15	-0.14	1.86
4,525.0	1.98	158.41	4,519.1	-119.9	149.4	-118.6	0.14	0.14	0.19
4,619.0	2.02	167.02	4,613.0	-123.1	150.4	-121.7	0.32	0.04	9.16
4,713.0	2.02	168.17	4,707.0	-126.3	151.1	-124.9	0.04	0.00	1.22
4,806.0	2.55	149.36	4,799.9	-129.7	152.5	-128.3	0.98	0.57	-20.23
4,843.1	2.62	148.42	4,837.0	-131.1	153.3	-129.7	0.22	0.19	-2.54
Brushy Canyon									
4,900.0	2.73	147.07	4,893.8	-133.4	154.7	-131.9	0.22	0.19	-2.37
4,993.0	3.12	151.55	4,986.7	-137.4	157.2	-136.0	0.49	0.42	4.82
5,086.0	3.03	156.83	5,079.5	-141.9	159.3	-140.5	0.32	-0.10	5.68
5,179.0	3.21	161.05	5,172.4	-146.6	161.1	-145.2	0.31	0.19	4.54
5,273.0	3.91	150.85	5,266.2	-151.9	163.6	-150.4	1.00	0.74	-10.85
5,367.0	3.21	153.49	5,360.0	-157.1	166.3	-155.6	0.76	-0.74	2.81
5,460.0	3.21	153.93	5,452.9	-161.8	168.6	-160.2	0.03	0.00	0.47
5,554.0	3.34	143.03	5,546.7	-166.3	171.4	-164.7	0.68	0.14	-11.60
5,647.0	3.69	135.21	5,639.6	-170.6	175.1	-169.0	0.64	0.38	-8.41
5,741.0	3.56	139.16	5,733.4	-174.9	179.2	-173.3	0.30	-0.14	4.20
5,835.0	3.43	139.42	5,827.2	-179.3	182.9	-177.6	0.14	-0.14	0.28
5,929.0	3.65	140.92	5,921.0	-183.8	186.6	-182.0	0.25	0.23	1.60
6,022.0	3.08	132.92	6,013.9	-187.8	190.3	-186.0	0.79	-0.61	-8.60
6,115.0	2.42	131.25	6,106.8	-190.7	193.6	-189.0	0.71	-0.71	-1.80
6,209.0	2.51	142.94	6,200.7	-193.7	196.4	-191.9	0.54	0.10	12.44
6,303.0	1.85	132.31	6,294.6	-196.4	198.7	-194.5	0.82	-0.70	-11.31
6,397.0	1.19	121.06	6,388.6	-197.9	200.7	-196.1	0.77	-0.70	-11.97
6,435.4	1.08	122.48	6,427.0	-198.3	201.3	-196.5	0.30	-0.29	3.71
Bone Spring Lime									
6,490.0	0.92	125.10	6,481.6	-198.8	202.1	-197.0	0.30	-0.29	4.79
6,584.0	0.31	3.11	6,575.6	-199.0	202.8	-197.1	1.19	-0.65	-129.78
6,678.0	1.41	322.41	6,669.5	-197.8	202.1	-196.0	1.27	1.17	-43.30
6,772.0	2.37	324.52	6,763.5	-195.3	200.2	-193.5	1.02	1.02	2.24
6,866.0	2.64	323.47	6,857.4	-192.0	197.8	-190.2	0.29	0.29	-1.12
6,959.0	6.77	316.88	6,950.1	-186.3	192.8	-184.5	4.47	4.44	-7.09

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,051.0	8.84	332.96	7,041.2	-176.0	185.9	-174.3	3.25	2.25	17.48
7,145.0	5.23	335.68	7,134.5	-165.7	180.8	-164.0	3.86	-3.84	2.89
7,239.0	2.15	351.50	7,228.3	-160.0	178.8	-158.4	3.42	-3.28	16.83
7,332.0	2.64	121.06	7,321.3	-159.4	180.4	-157.8	4.66	0.53	139.31
7,362.8	2.51	124.86	7,352.0	-160.2	181.5	-158.5	0.69	-0.42	12.35
1st Bone Spring Sand									
7,426.0	2.29	133.89	7,415.2	-161.8	183.6	-160.2	0.69	-0.35	14.28
7,519.0	1.98	157.44	7,508.1	-164.6	185.5	-162.9	0.99	-0.33	25.32
7,613.0	1.58	155.51	7,602.1	-167.3	186.7	-165.6	0.43	-0.43	-2.05
7,707.0	1.14	185.13	7,696.0	-169.4	187.2	-167.7	0.87	-0.47	31.51
7,801.0	0.48	139.95	7,790.0	-170.6	187.3	-168.9	0.93	-0.70	-48.06
7,894.0	0.70	156.56	7,883.0	-171.4	187.8	-169.7	0.30	0.24	17.86
7,943.0	0.59	231.58	7,932.0	-171.9	187.7	-170.2	1.62	-0.22	153.15
2nd Bone Spring Sand									
7,987.0	1.14	263.79	7,976.0	-172.1	187.1	-170.4	1.62	1.24	73.18
8,081.0	1.10	279.61	8,070.0	-172.0	185.3	-170.3	0.33	-0.04	16.83
8,174.0	0.75	176.43	8,163.0	-172.5	184.4	-170.8	1.58	-0.38	-110.95
8,268.0	0.92	212.11	8,257.0	-173.7	184.1	-172.0	0.57	0.18	37.96
8,361.0	0.97	210.70	8,350.0	-175.0	183.3	-173.4	0.06	0.05	-1.52
8,454.0	0.62	185.30	8,443.0	-176.2	182.8	-174.5	0.53	-0.38	-27.31
8,547.0	0.44	107.43	8,536.0	-176.8	183.1	-175.2	0.73	-0.19	-83.73
8,640.0	1.58	332.43	8,628.9	-175.8	182.9	-174.1	2.06	1.23	-145.16
8,734.0	1.49	303.96	8,722.9	-174.0	181.3	-172.3	0.81	-0.10	-30.29
8,828.0	0.79	267.13	8,816.9	-173.3	179.6	-171.7	1.04	-0.74	-39.18
8,921.0	0.92	226.09	8,909.9	-173.9	178.4	-172.2	0.66	0.14	-44.13
9,014.0	1.05	210.00	9,002.9	-175.1	177.5	-173.5	0.33	0.14	-17.30
9,108.0	0.88	226.88	9,096.9	-176.4	176.5	-174.7	0.35	-0.18	17.96
9,195.2	1.17	231.78	9,184.0	-177.4	175.3	-175.8	0.34	0.33	5.62
3rd Bone Spring Sand									
9,202.0	1.19	232.06	9,190.8	-177.4	175.2	-175.9	0.34	0.33	4.15
9,349.0	1.89	225.38	9,337.8	-180.1	172.3	-178.5	0.49	0.48	-4.54
9,396.0	1.85	329.88	9,384.8	-180.0	171.3	-178.4	6.29	-0.09	222.34
9,443.0	8.04	359.42	9,431.6	-176.0	170.9	-174.5	13.82	13.17	62.85
9,453.6	9.92	2.78	9,442.0	-174.4	171.0	-172.8	18.47	17.80	31.81
3rd BS W Sand									
9,490.0	16.53	8.47	9,477.5	-166.1	171.9	-164.5	18.47	18.14	15.62
9,536.0	23.25	10.58	9,520.7	-150.7	174.5	-149.1	14.69	14.61	4.59
9,539.6	23.68	10.56	9,524.0	-149.3	174.8	-147.7	11.90	11.89	-0.69
FTP @ 9539.6'MD, 100'FSL & 678.9'FEL									
9,548.4	24.72	10.50	9,532.0	-145.8	175.4	-144.2	11.90	11.89	-0.65
Wolfcamp A									
9,583.0	28.84	10.31	9,562.9	-130.4	178.2	-128.8	11.90	11.89	-0.54
9,629.0	33.85	10.14	9,602.2	-106.9	182.5	-105.2	10.89	10.89	-0.37
9,676.0	37.23	9.70	9,640.4	-80.0	187.2	-78.3	7.21	7.19	-0.94

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,678.0	37.39	9.72	9,642.0	-78.8	187.4	-77.1	8.23	8.22	0.82
Wolfcamp A Y Sand									
9,722.0	41.01	10.05	9,676.1	-51.4	192.2	-49.6	8.23	8.22	0.76
9,769.0	42.95	10.67	9,711.0	-20.4	197.8	-18.7	4.22	4.13	1.32
9,816.0	46.59	11.02	9,744.4	12.1	204.1	13.9	7.76	7.74	0.74
9,842.0	48.35	10.77	9,762.0	30.9	207.7	32.8	6.78	6.74	-0.96
Wolfcamp A Fat									
9,863.0	49.76	10.58	9,775.7	46.5	210.6	48.4	6.78	6.75	-0.91
9,909.0	51.87	7.33	9,804.8	81.7	216.2	83.6	7.14	4.59	-7.07
9,956.0	52.97	4.34	9,833.5	118.7	219.9	120.7	5.56	2.34	-6.36
10,003.0	57.36	3.11	9,860.3	157.2	222.4	159.2	9.58	9.34	-2.62
10,050.0	63.03	0.03	9,883.7	197.9	223.5	200.0	13.33	12.06	-6.55
10,096.0	68.92	358.18	9,902.4	239.9	222.8	241.9	13.32	12.80	-4.02
10,143.0	74.07	357.48	9,917.3	284.5	221.1	286.4	11.05	10.96	-1.49
10,189.0	78.37	357.57	9,928.3	329.1	219.2	331.1	9.35	9.35	0.20
10,236.0	82.68	358.62	9,936.0	375.4	217.7	377.4	9.43	9.17	2.23
10,281.0	84.57	359.24	9,941.0	420.1	216.8	422.1	4.42	4.20	1.38
10,374.0	89.63	1.08	9,945.7	513.0	217.1	514.9	5.79	5.44	1.98
10,467.0	86.37	355.55	9,948.9	605.8	214.4	607.7	6.90	-3.51	-5.95
10,561.0	90.29	357.04	9,951.7	699.6	208.3	701.4	4.46	4.17	1.59
10,654.0	91.82	358.18	9,950.0	792.5	204.4	794.3	2.05	1.65	1.23
10,747.0	91.56	358.01	9,947.2	885.4	201.3	887.2	0.33	-0.28	-0.18
10,840.0	91.16	357.48	9,945.0	978.3	197.7	980.0	0.71	-0.43	-0.57
10,934.0	90.99	358.01	9,943.3	1,072.2	194.0	1,073.9	0.59	-0.18	0.56
11,027.0	90.29	359.15	9,942.2	1,165.1	191.7	1,166.8	1.44	-0.75	1.23
11,120.0	90.81	0.73	9,941.3	1,258.1	191.6	1,259.8	1.79	0.56	1.70
11,212.0	89.19	1.70	9,941.3	1,350.1	193.5	1,351.8	2.05	-1.76	1.05
11,305.0	88.53	1.17	9,943.2	1,443.1	195.9	1,444.8	0.91	-0.71	-0.57
11,399.0	87.38	0.65	9,946.5	1,537.0	197.4	1,538.7	1.34	-1.22	-0.55
11,492.0	86.55	359.85	9,951.5	1,629.8	197.8	1,631.6	1.24	-0.89	-0.86
11,585.0	86.20	359.85	9,957.3	1,722.7	197.5	1,724.4	0.38	-0.38	0.00
11,679.0	85.49	359.33	9,964.1	1,816.4	196.9	1,818.1	0.94	-0.76	-0.55
11,772.0	89.05	1.26	9,968.6	1,909.3	197.3	1,911.0	4.35	3.83	2.08
11,866.0	88.88	1.26	9,970.3	2,003.2	199.4	2,005.0	0.18	-0.18	0.00
11,959.0	88.35	1.61	9,972.5	2,096.2	201.7	2,097.9	0.68	-0.57	0.38
12,052.0	88.84	2.14	9,974.8	2,189.1	204.8	2,190.9	0.78	0.53	0.57
12,145.0	90.20	1.61	9,975.6	2,282.1	207.8	2,283.9	1.57	1.46	-0.57
12,238.0	89.32	1.08	9,976.0	2,375.0	210.0	2,376.8	1.10	-0.95	-0.57
12,330.0	89.05	1.88	9,977.3	2,467.0	212.4	2,468.8	0.92	-0.29	0.87
12,423.0	88.53	0.82	9,979.2	2,559.9	214.6	2,561.8	1.27	-0.56	-1.14
12,516.0	92.09	2.58	9,978.7	2,652.9	217.3	2,654.7	4.27	3.83	1.89
12,610.0	91.96	2.49	9,975.4	2,746.7	221.5	2,748.6	0.17	-0.14	-0.10
12,703.0	91.25	1.61	9,972.8	2,839.6	224.8	2,841.6	1.22	-0.76	-0.95
12,796.0	90.42	0.82	9,971.5	2,932.6	226.8	2,934.5	1.23	-0.89	-0.85

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,889.0	91.38	1.96	9,970.0	3,025.6	229.0	3,027.5	1.60	1.03	1.23
12,982.0	90.99	1.70	9,968.1	3,118.5	232.0	3,120.5	0.50	-0.42	-0.28
13,075.0	89.98	1.79	9,967.3	3,211.4	234.8	3,213.4	1.09	-1.09	0.10
13,169.0	89.27	0.82	9,967.9	3,305.4	237.0	3,307.4	1.28	-0.76	-1.03
13,263.0	89.45	1.08	9,968.9	3,399.4	238.5	3,401.4	0.34	0.19	0.28
13,357.0	88.75	1.08	9,970.4	3,493.4	240.3	3,495.4	0.74	-0.74	0.00
13,450.0	88.88	1.17	9,972.3	3,586.3	242.1	3,588.4	0.17	0.14	0.10
13,544.0	88.92	1.44	9,974.2	3,680.3	244.3	3,682.4	0.29	0.04	0.29
13,638.0	88.62	0.47	9,976.2	3,774.3	245.8	3,776.3	1.08	-0.32	-1.03
13,732.0	88.53	0.47	9,978.5	3,868.2	246.6	3,870.3	0.10	-0.10	0.00
13,825.0	87.91	0.12	9,981.4	3,961.2	247.1	3,963.3	0.77	-0.67	-0.38
13,918.0	88.57	359.77	9,984.3	4,054.1	247.0	4,056.2	0.80	0.71	-0.38
14,011.0	88.70	359.33	9,986.5	4,147.1	246.3	4,149.2	0.49	0.14	-0.47
14,105.0	90.11	359.94	9,987.4	4,241.1	245.7	4,243.1	1.63	1.50	0.65
14,199.0	90.02	359.68	9,987.3	4,335.1	245.4	4,337.1	0.29	-0.10	-0.28
14,292.0	89.01	0.47	9,988.1	4,428.1	245.5	4,430.1	1.38	-1.09	0.85
14,385.0	88.09	359.50	9,990.5	4,521.1	245.4	4,523.1	1.44	-0.99	-1.04
14,479.0	87.69	358.54	9,993.9	4,615.0	243.8	4,617.0	1.11	-0.43	-1.02
14,573.0	89.54	358.98	9,996.2	4,708.9	241.8	4,710.9	2.02	1.97	0.47
14,666.0	89.19	358.36	9,997.2	4,801.9	239.7	4,803.9	0.77	-0.38	-0.67
14,760.0	89.58	357.57	9,998.3	4,895.8	236.3	4,897.8	0.94	0.41	-0.84
14,854.0	89.85	357.31	9,998.7	4,989.7	232.1	4,991.6	0.40	0.29	-0.28
14,947.0	92.04	359.68	9,997.2	5,082.7	229.7	5,084.5	3.47	2.35	2.55
15,041.0	89.71	357.92	9,995.7	5,176.6	227.7	5,178.5	3.11	-2.48	-1.87
15,134.0	89.67	357.39	9,996.3	5,269.5	223.9	5,271.4	0.57	-0.04	-0.57
15,228.0	89.71	357.04	9,996.8	5,363.4	219.3	5,365.2	0.37	0.04	-0.37
15,322.0	91.96	359.77	9,995.4	5,457.4	216.7	5,459.1	3.76	2.39	2.90
15,415.0	91.91	1.17	9,992.2	5,550.3	217.5	5,552.1	1.51	-0.05	1.51
15,508.0	91.69	0.82	9,989.3	5,643.3	219.1	5,645.0	0.44	-0.24	-0.38
15,602.0	89.45	1.08	9,988.4	5,737.2	220.6	5,739.0	2.40	-2.38	0.28
15,695.0	87.56	0.56	9,990.8	5,830.2	222.0	5,832.0	2.11	-2.03	-0.56
15,789.0	88.44	1.26	9,994.1	5,924.1	223.5	5,925.9	1.20	0.94	0.74
15,883.0	88.62	5.66	9,996.5	6,017.9	229.1	6,019.7	4.68	0.19	4.68
15,977.0	86.86	6.01	10,000.2	6,111.3	238.7	6,113.2	1.91	-1.87	0.37
16,070.0	86.37	6.45	10,005.7	6,203.6	248.8	6,205.6	0.71	-0.53	0.47
16,163.0	85.58	6.53	10,012.2	6,295.8	259.3	6,297.9	0.85	-0.85	0.09
16,257.0	87.43	4.25	10,018.0	6,389.2	268.1	6,391.4	3.12	1.97	-2.43
16,350.0	87.69	4.78	10,021.9	6,481.8	275.4	6,484.1	0.63	0.28	0.57
16,443.0	87.38	5.04	10,025.9	6,574.4	283.3	6,576.7	0.43	-0.33	0.28
16,537.0	88.31	4.25	10,029.5	6,668.0	290.9	6,670.4	1.30	0.99	-0.84
16,627.4	88.48	3.65	10,032.0	6,758.2	297.2	6,760.6	0.69	0.18	-0.67
Wolfcamp B									
16,630.0	88.48	3.63	10,032.1	6,760.8	297.3	6,763.2	0.69	0.18	-0.67

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
16,723.0	89.54	3.55	10,033.7	6,853.6	303.1	6,856.0	1.14	1.14	-0.09	
16,817.0	89.27	3.37	10,034.7	6,947.4	308.8	6,949.9	0.35	-0.29	-0.19	
16,910.0	89.85	4.51	10,035.4	7,040.2	315.2	7,042.7	1.38	0.62	1.23	
16,925.8	89.97	4.73	10,035.4	7,055.9	316.5	7,058.5	1.59	0.76	1.40	
LTP @ 16925.8'MD, 330'FNL & 602'FEL										
16,973.0	90.33	5.39	10,035.3	7,102.9	320.6	7,105.5	1.59	0.76	1.40	
LAST SVY										
17,046.0	90.33	5.39	10,034.8	7,175.6	327.5	7,178.3	0.00	0.00	0.00	
Projection to TD @ 17046'MD, 211'FNL & 592.3'FEL										

Design Targets										
Target Name										
- hit/miss target	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude		Longitude
- Shape										
FTP (Money Graham	0.00	0.00	9,946.0	-149.0	216.0	364,040.00	644,587.00	32° 0' 1.400 N		104° 0' 0.925 W
- actual wellpath misses target center by 257.4usft at 9837.4usft MD (9758.9 TVD, 27.5 N, 207.0 E)										
- Point										
LTP (Money Graham	0.00	0.00	10,004.0	7,054.0	280.0	371,243.00	644,651.00	32° 1' 12.680 N		103° 59' 59.924 W
- actual wellpath misses target center by 47.9usft at 16920.9usft MD (10035.4 TVD, 7051.0 N, 316.1 E)										
- Point										
PBHL (Money Graham	0.50	0.52	10,004.7	7,184.0	282.0	371,373.00	644,653.00	32° 1' 13.967 N		103° 59' 59.896 W
- actual wellpath misses target center by 55.2usft at 17046.0usft MD (10034.8 TVD, 7175.6 N, 327.5 E)										
- Rectangle (sides W100.0 H7,334.0 D20.0)										

Company:	Tap Rock Resources, LLC	Local Co-ordinate Reference:	Well Money Graham Fed Com #218H
Project:	Eddy County, NM (NAD 83 NME)	TVD Reference:	KB @ 2892.0usft (H&P 245)
Site:	(Money Graham) Sec-32_T-26-S_R-29-E	MD Reference:	KB @ 2892.0usft (H&P 245)
Well:	Money Graham Fed Com #218H	North Reference:	Grid
Wellbore:	OWB	Survey Calculation Method:	Minimum Curvature
Design:	AWB	Database:	EDM 5000.15 Single User Db

Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
507.0	507.0	Rustler Anhydrite			
682.0	682.0	Top Salt			
2,394.2	2,392.0	Base Salt			
2,735.7	2,732.0	Delaware Mountain Gp			
2,851.0	2,847.0	Bell Canyon			
2,851.0	2,847.0	Lamar			
2,891.1	2,887.0	Ramsey Sand			
3,867.5	3,862.0	Cherry Canyon			
4,843.1	4,837.0	Brushy Canyon			
6,435.4	6,427.0	Bone Spring Lime			
7,362.8	7,352.0	1st Bone Spring Sand			
7,943.0	7,932.0	2nd Bone Spring Sand			
9,195.2	9,184.0	3rd Bone Spring Sand			
9,453.6	9,442.0	3rd BS W Sand			
9,548.4	9,532.0	Wolfcamp A			
9,678.0	9,642.0	Wolfcamp A Y Sand			
9,842.0	9,762.0	Wolfcamp A Fat			
16,627.4	10,032.0	Wolfcamp B			

Design Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
9,539.6	9,524.0	-149.3	174.8	FTP @ 9539.6'MD, 100'FSL & 678.9'FEL
16,925.8	10,035.4	7,055.9	316.5	LTP @ 16925.8'MD, 330'FNL & 602'FEL
16,973.0	10,035.3	7,102.9	320.6	LAST SVY
17,046.0	10,034.8	7,175.6	327.5	Projection to TD @ 17046'MD, 211'FNL & 592.3'FEL

Checked By: _____ Approved By: _____ Date: _____