

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-41047
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator CHEVRON U S A , INC		6. State Oil & Gas Lease No.
3. Address of Operator 15 SMITH ROAD MIDLAND, TX 79705		7. Lease Name or Unit Agreement Name SKEEN 2 26 27 STATE
4. Well Location Unit Letter C : 150' feet from the North line and 1980' feet from the West line Section 2 Township 26 S Range 27 E NMPM County EDDY		8. Well Number 2H
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3204" GR		9. OGRID Number 4323
		10. Pool name or Wildcat DELAWARE RIVER; BONE SPRING (16800)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:


REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: Production Casing ☒

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Please find Chevron's request to amend the production casing program as highlighted in the attached.
Amended directional plans are attached as well.



Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Regulatory Specialist II DATE 06/19/2013

Type or print name Bryan Arrant (Agent for Chevron) E-mail address: bryan.arrant@chk.com PHONE: (405)935-3782

For State Use Only

APPROVED BY: [Signature] TITLE Dist. IT Supervisor DATE 6/24/2013

Conditions of Approval (if any):

Skeen 2 26 27 ST 2H 30-015-40146

Original
Update

²¹ Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight / ft	Setting depth	Sx Cement	Estimated TOC
Surface	17-1/2"	13-3/8"	48#	450'	446'	Surface
Intermediate	12-1/4"	9-5/8"	40#	2,250'	690'	Surface
Production	8-3/4" --> 8-1/2" - lateral	5-1/2"	17#	+/-7,725' TVD, 12,472' MD	2193'	1,250'

²² Proposed BOP

Type	Working Press	Test Press (psi)	Manufacturer
13-5/8" 10M (double ram and single ram)	5,000	5,000	Cameron Type U

Casing / Cement Program: Additional Comments

Type	Hole Size (in)	Casing Size (in)	Casing Weight / ft	Setting depth (ft)	Estimated TOC	Bottom of Cmt interval (ft)	Sacks of Cement (sx)
Surface	17-1/2"	13-3/8"	48#	450'	Surface	450'	446
Intermediate	12-1/4"	9-5/8"	40#	2,250'	Surface	2,250'	690
Production	8-3/4" --> 8-1/2" - lateral	5-1/2"	17#	+/-7,725' TVD, 12,472' MD	1,250'	12,472'	2193

Note: Production section will be cased hole and cemented.


H&P 227

Chevron


REV 1

PATHFINDER
A Schlumberger Company

WELL	Screen 2-26-27 State 2H	FIELD	Eddy County, NM (NAD 27)	STRUCTURE	H&P 227
Magnets: Parameters Model: BGCM 2012 Dip: 59.856° Xip Dec: 7.780° Date: April 02, 2013 FS: 49251.76T		Surface Location Lat: N 32 32 44.073 Lon: W 104 8 45.600 Northing: 392221.90 S1US Easting: 552640.90 S1US NAD27 New Mexico State Plane, Eastern Zone, 11s Feet Grid Conv: 0.991° Scale Fact: 0.99991229		Misc/Notes Sht: Screen 2-26-27 State 2H Plan: 5711 Rev'd mcs 23 April 3 TVD Ref: RKB32280 above MSL Srv Date: April 02, 2013	

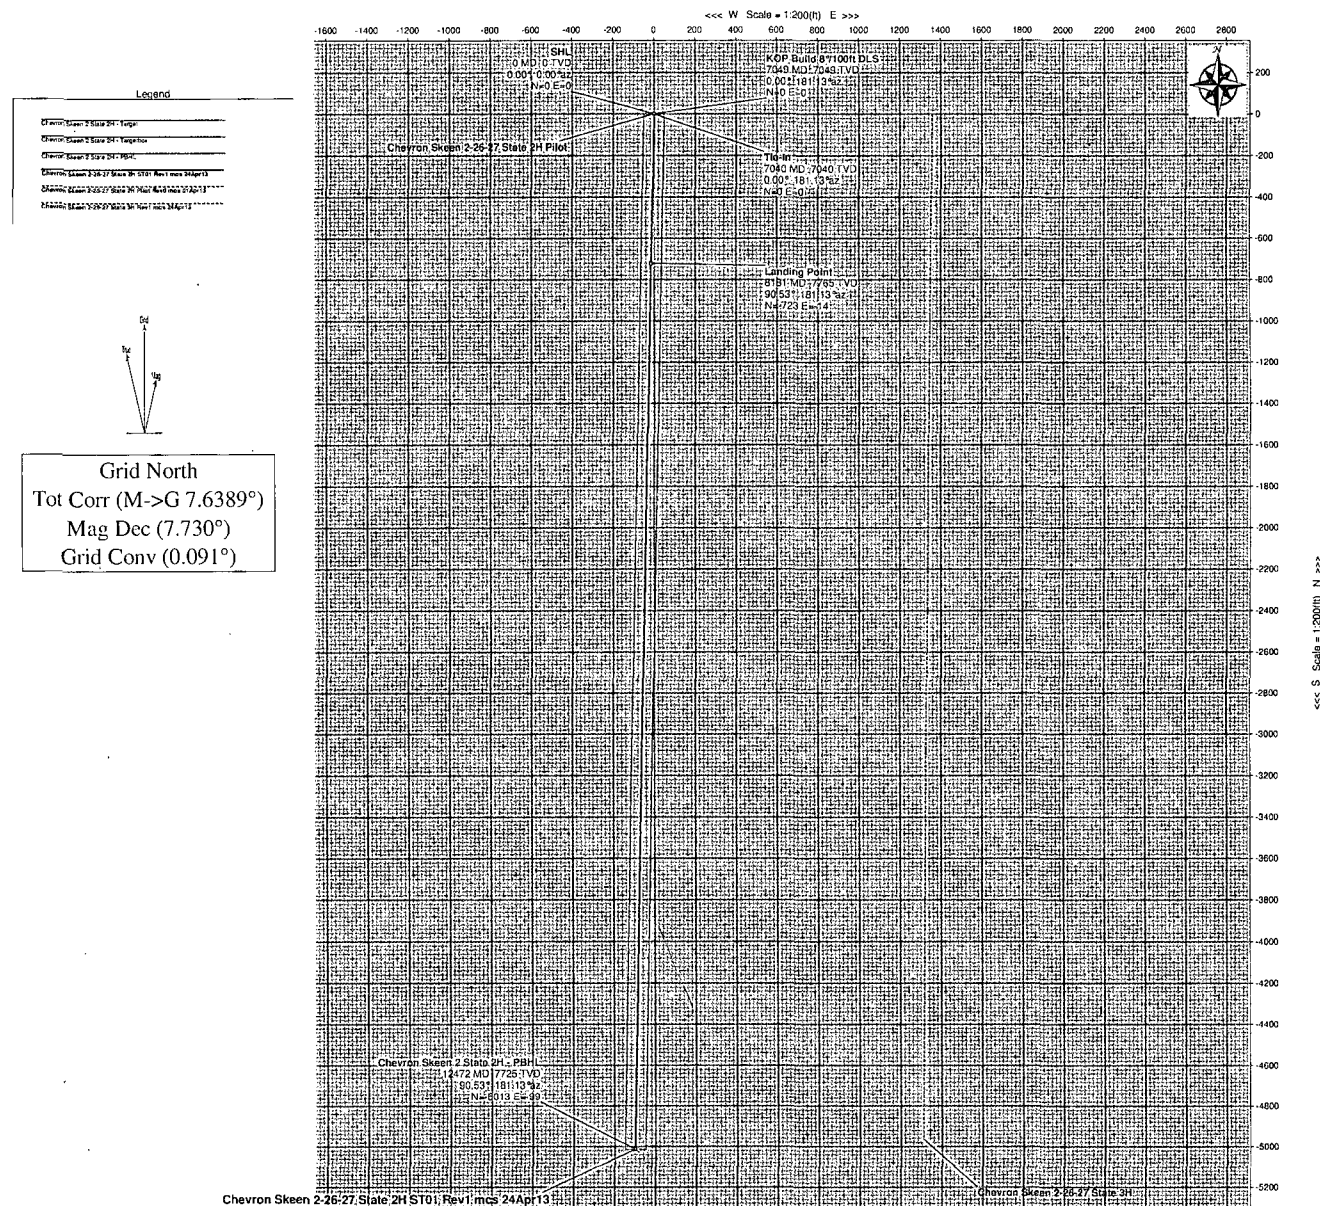

Critical Points																
Comments	Survey MD	Inc	Azim	TVD	SSTVD	VS	NS	EW	Longitude	Latitude	Easting	Northing	DLS	Tool Face		
SHL	0.00	0.00	0.00	0.00	-3229.00	0.00	0.00	0.00	N 32	4 42.073	W 104	9 45.609	552860.00	392271.00	181.13	
Tie-In	7040.00	0.00	181.13	7040.00	3811.00	0.00	0.00	0.00	N 32	4 42.073	W 104	9 45.609	552860.00	392271.00	0.00	181.13
KOP Build 8 y 100ft DLS	7048.83	0.00	181.13	7048.83	3819.83	0.00	0.00	0.00	N 32	4 42.073	W 104	9 45.609	552860.00	392271.00	0.00	181.13
Landing Point	18180.51	90.53	181.13	7765.00	4536.00	722.88	-722.74	-14.26	N 32	4 34.921	W 104	9 45.788	552845.75	391548.33	8.00	105.20
PBHL	12472.25	90.53	181.13	7725.00	4496.00	5014.43	-5013.45	-99.01	N 32	3 52.463	W 104	9 46.851	552761.00	387258.00	0.00	

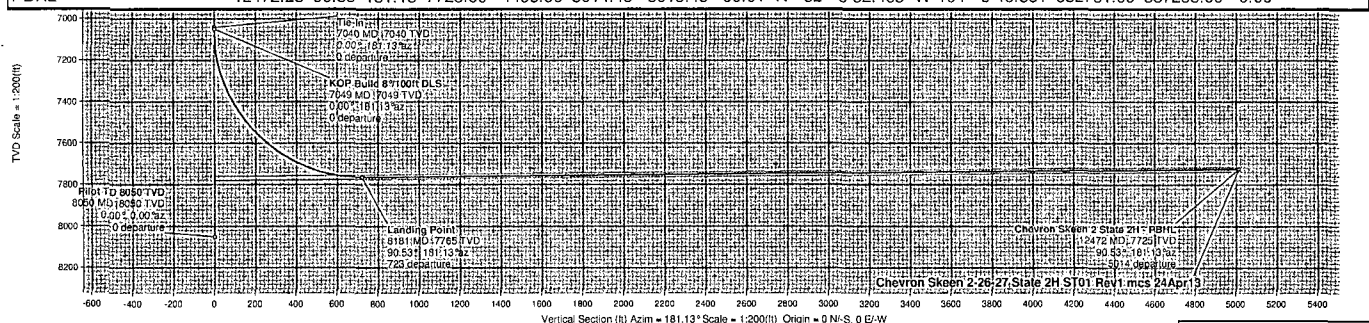

Drawn By: MSheffer
 Date Created: April 26, 2013 01:55:38 PM
 Checked By:
 Checked Date:
 Approved By:
 Approved Date:



Chevron Skeen 2-26-27 State 2H ST01 Rev1 mcs 24Apr13 Proposal Geodetic Report
(Def Plan)



Report Date: April 26, 2013 - 01:44 PM
Client: Chevron
Field: NM Eddy County (NAD 27)
Structure / Slot: Chevron Skeen 2-26-27 State 2H / Chevron Skeen 2-26-27 State 2H
Well: Chevron Skeen 2-26-27 State 2H
Borehole: ST01
UWI / API#: H&P 227 / 30-015-41047
Survey Name: Chevron Skeen 2-26-27 State 2H ST01 Rev1 mcs 24Apr13
Survey Date: April 02, 2013
Tort / AHD / DDI / ERD Ratio: 90.538 * / 5014.427 ft / 5.863 / 0.646
Coordinate Reference System: NAD27 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 4' 42.07324", W 104° 9' 45.60877"
Location Grid N/E Y/X: N 392271.000 ftUS, E 552860.000 ftUS
CRS Grid Convergence Angle: 0.0905°
Grid Scale Factor: 0.99991229

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 181.131° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3229.000 ft above MSL
Seabed / Ground Elevation: 3204.000 ft above MSL
Magnetic Declination: 7.730°
Total Gravity Field Strength: 998.4936mgn (9.80665 Based)
Total Magnetic Field Strength: 48253.695 nT
Magnetic Dip Angle: 59.856°
Declination Date: April 02, 2013
Magnetic Declination Model: BGGM 2012
North Reference: Grid North
Grid Convergence Used: 0.0906°
Total Corr Mag North->Grid North: 7.6399°
Local Coord Referenced To: Structure Reference Point

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	TVDSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL	0.00	0.00	0.00	0.00	-3229.00	0.00	0.00	0.00	N/A	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	100.00	0.00	181.13	100.00	-3129.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	200.00	0.00	181.13	200.00	-3029.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	300.00	0.00	181.13	300.00	-2929.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	400.00	0.00	181.13	400.00	-2829.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	500.00	0.00	181.13	500.00	-2729.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	600.00	0.00	181.13	600.00	-2629.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	700.00	0.00	181.13	700.00	-2529.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	800.00	0.00	181.13	800.00	-2429.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	900.00	0.00	181.13	900.00	-2329.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1000.00	0.00	181.13	1000.00	-2229.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1100.00	0.00	181.13	1100.00	-2129.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1200.00	0.00	181.13	1200.00	-2029.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1300.00	0.00	181.13	1300.00	-1929.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1400.00	0.00	181.13	1400.00	-1829.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1500.00	0.00	181.13	1500.00	-1729.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1600.00	0.00	181.13	1600.00	-1629.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1700.00	0.00	181.13	1700.00	-1529.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1800.00	0.00	181.13	1800.00	-1429.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	1900.00	0.00	181.13	1900.00	-1329.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2000.00	0.00	181.13	2000.00	-1229.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2100.00	0.00	181.13	2100.00	-1129.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2200.00	0.00	181.13	2200.00	-1029.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2300.00	0.00	181.13	2300.00	-929.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2400.00	0.00	181.13	2400.00	-829.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2500.00	0.00	181.13	2500.00	-729.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2600.00	0.00	181.13	2600.00	-629.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2700.00	0.00	181.13	2700.00	-529.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2800.00	0.00	181.13	2800.00	-429.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	2900.00	0.00	181.13	2900.00	-329.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3000.00	0.00	181.13	3000.00	-229.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3100.00	0.00	181.13	3100.00	-129.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3200.00	0.00	181.13	3200.00	-29.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3300.00	0.00	181.13	3300.00	71.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3400.00	0.00	181.13	3400.00	171.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3500.00	0.00	181.13	3500.00	271.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3600.00	0.00	181.13	3600.00	371.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3700.00	0.00	181.13	3700.00	471.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3800.00	0.00	181.13	3800.00	571.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	3900.00	0.00	181.13	3900.00	671.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4000.00	0.00	181.13	4000.00	771.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4100.00	0.00	181.13	4100.00	871.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4200.00	0.00	181.13	4200.00	971.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4300.00	0.00	181.13	4300.00	1071.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4400.00	0.00	181.13	4400.00	1171.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4500.00	0.00	181.13	4500.00	1271.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4600.00	0.00	181.13	4600.00	1371.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4700.00	0.00	181.13	4700.00	1471.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4800.00	0.00	181.13	4800.00	1571.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	4900.00	0.00	181.13	4900.00	1671.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5000.00	0.00	181.13	5000.00	1771.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5100.00	0.00	181.13	5100.00	1871.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5200.00	0.00	181.13	5200.00	1971.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5300.00	0.00	181.13	5300.00	2071.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5400.00	0.00	181.13	5400.00	2171.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5500.00	0.00	181.13	5500.00	2271.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5600.00	0.00	181.13	5600.00	2371.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5700.00	0.00	181.13	5700.00	2471.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5800.00	0.00	181.13	5800.00	2571.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	5900.00	0.00	181.13	5900.00	2671.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6000.00	0.00	181.13	6000.00	2771.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6100.00	0.00	181.13	6100.00	2871.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6200.00	0.00	181.13	6200.00	2971.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6300.00	0.00	181.13	6300.00	3071.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6400.00	0.00	181.13	6400.00	3171.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6500.00	0.00	181.13	6500.00	3271.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6600.00	0.00	181.13	6600.00	3371.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6700.00	0.00	181.13	6700.00	3471.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	6800.00	0.00	181.13	6800.00	3571.00	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	TVDSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
KOP Build 8*/100ft DLS	7048.83	0.00	181.13	7048.83	3819.83	0.00	0.00	0.00	0.00	392271.00	552860.00	N 32 4 42.07	W 104 9 45.61
	7100.00	4.09	181.13	7099.96	3870.96	1.83	-1.83	-0.04	8.00	392269.17	552859.96	N 32 4 42.06	W 104 9 45.61
	7200.00	12.09	181.13	7198.88	3969.88	15.89	-15.89	-0.31	8.00	392255.11	552859.89	N 32 4 41.92	W 104 9 45.61
	7300.00	20.09	181.13	7294.88	4065.88	43.59	-43.58	-0.86	8.00	392227.42	552859.14	N 32 4 41.64	W 104 9 45.62
	7400.00	28.09	181.13	7386.10	4157.10	84.38	-84.37	-1.66	8.00	392186.64	552858.34	N 32 4 41.24	W 104 9 45.63
	7500.00	36.09	181.13	7470.75	4241.75	137.47	-137.44	-2.71	8.00	392133.57	552857.29	N 32 4 40.71	W 104 9 45.64
	7600.00	44.09	181.13	7547.18	4318.18	201.82	-201.78	-3.98	8.00	392069.24	552856.02	N 32 4 40.08	W 104 9 45.66
	7700.00	52.09	181.13	7613.92	4384.92	276.18	-276.13	-5.45	8.00	391994.89	552854.55	N 32 4 39.74	W 104 9 45.68
	7800.00	60.09	181.13	7669.66	4440.66	359.11	-359.04	-7.08	8.00	391911.99	552852.92	N 32 4 38.52	W 104 9 45.70
	7900.00	68.09	181.13	7713.31	4484.31	448.99	-448.90	-8.85	8.00	391822.14	552851.15	N 32 4 37.63	W 104 9 45.72
Landing Point	8000.00	76.09	181.13	7744.04	4515.04	544.07	-543.96	-10.73	8.00	391727.09	552849.27	N 32 4 36.69	W 104 9 45.74
	8100.00	84.09	181.13	7761.23	4532.23	642.50	-642.37	-12.67	8.00	391628.68	552847.33	N 32 4 35.72	W 104 9 45.77
	8180.51	90.53	181.13	7765.00	4536.00	722.88	-722.74	-14.26	8.00	391548.33	552845.75	N 32 4 34.92	W 104 9 45.79
	8200.00	90.53	181.13	7764.81	4535.81	742.37	-742.22	-14.64	0.00	391528.84	552845.36	N 32 4 34.73	W 104 9 45.79
	8300.00	90.53	181.13	7763.88	4534.88	842.36	-842.20	-16.61	0.00	391428.88	552843.39	N 32 4 33.74	W 104 9 45.82
	8400.00	90.53	181.13	7762.95	4533.95	942.36	-942.17	-18.58	0.00	391328.91	552841.42	N 32 4 32.75	W 104 9 45.84
	8500.00	90.53	181.13	7762.02	4533.02	1042.35	-1042.15	-20.56	0.00	391228.94	552839.44	N 32 4 31.76	W 104 9 45.87
	8600.00	90.53	181.13	7761.08	4532.08	1142.35	-1142.13	-22.53	0.00	391128.98	552837.47	N 32 4 30.77	W 104 9 45.89
	8700.00	90.53	181.13	7760.15	4531.15	1242.34	-1242.10	-24.50	0.00	391029.01	552835.50	N 32 4 29.78	W 104 9 45.92
	8800.00	90.53	181.13	7759.22	4530.22	1342.34	-1342.08	-26.47	0.00	390929.04	552833.53	N 32 4 28.79	W 104 9 45.94
	8900.00	90.53	181.13	7758.29	4529.29	1442.34	-1442.06	-28.45	0.00	390829.07	552831.55	N 32 4 27.80	W 104 9 45.97
	9000.00	90.53	181.13	7757.35	4528.35	1542.33	-1542.03	-30.42	0.00	390729.11	552829.58	N 32 4 26.81	W 104 9 45.99
	9100.00	90.53	181.13	7756.42	4527.42	1642.33	-1642.01	-32.39	0.00	390629.14	552827.61	N 32 4 25.82	W 104 9 46.02
	9200.00	90.53	181.13	7755.49	4526.49	1742.32	-1741.98	-34.37	0.00	390529.17	552825.64	N 32 4 24.84	W 104 9 46.04
	9300.00	90.53	181.13	7754.56	4525.56	1842.32	-1841.89	-36.34	0.00	390429.21	552823.66	N 32 4 23.85	W 104 9 46.06
	9400.00	90.53	181.13	7753.62	4524.62	1942.31	-1941.94	-38.31	0.00	390329.24	552821.69	N 32 4 22.86	W 104 9 46.09
	9500.00	90.53	181.13	7752.69	4523.69	2042.31	-2041.81	-40.29	0.00	390229.27	552819.72	N 32 4 21.87	W 104 9 46.11
	9600.00	90.53	181.13	7751.76	4522.76	2142.31	-2141.89	-42.26	0.00	390129.30	552817.74	N 32 4 20.88	W 104 9 46.14
	9700.00	90.53	181.13	7750.83	4521.83	2242.30	-2241.86	-44.24	0.00	390029.34	552815.77	N 32 4 19.89	W 104 9 46.16
	9800.00	90.53	181.13	7749.90	4520.90	2342.30	-2341.84	-46.21	0.00	389929.37	552813.79	N 32 4 18.90	W 104 9 46.19
	9900.00	90.53	181.13	7748.96	4519.96	2442.29	-2441.82	-48.18	0.00	389829.40	552811.82	N 32 4 17.91	W 104 9 46.21
	10000.00	90.53	181.13	7748.03	4519.03	2542.29	-2541.79	-50.16	0.00	389729.43	552809.85	N 32 4 16.92	W 104 9 46.24
	10100.00	90.53	181.13	7747.10	4518.10	2642.28	-2641.77	-52.13	0.00	389629.47	552807.87	N 32 4 15.93	W 104 9 46.26
	10200.00	90.53	181.13	7746.17	4517.17	2742.28	-2741.75	-54.11	0.00	389529.50	552805.90	N 32 4 14.94	W 104 9 46.29
	10300.00	90.53	181.13	7745.24	4516.24	2842.28	-2841.72	-56.08	0.00	389429.53	552803.92	N 32 4 13.95	W 104 9 46.31
	10400.00	90.53	181.13	7744.30	4515.30	2942.27	-2941.70	-58.06	0.00	389329.57	552801.95	N 32 4 12.96	W 104 9 46.34
	10500.00	90.53	181.13	7743.37	4514.37	3042.27	-3041.67	-60.03	0.00	389229.60	552799.97	N 32 4 11.97	W 104 9 46.36
	10600.00	90.53	181.13	7742.44	4513.44	3142.26	-3141.65	-62.01	0.00	389129.63	552798.00	N 32 4 10.99	W 104 9 46.39
	10700.00	90.53	181.13	7741.51	4512.51	3242.26	-3241.63	-63.98	0.00	389029.66	552796.02	N 32 4 10.00	W 104 9 46.41
	10800.00	90.53	181.13	7740.58	4511.58	3342.25	-3341.60	-65.96	0.00	388929.69	552794.05	N 32 4 9.01	W 104 9 46.44
	10900.00	90.53	181.13	7739.64	4510.64	3442.25	-3441.58	-67.93	0.00	388829.73	552792.07	N 32 4 8.02	W 104 9 46.46
	11000.00	90.53	181.13	7738.71	4509.71	3542.24	-3541.55	-69.91	0.00	388729.76	552790.10	N 32 4 7.03	W 104 9 46.49
	11100.00	90.53	181.13	7737.78	4508.78	3642.24	-3641.53	-71.88	0.00	388629.80	552788.12	N 32 4 6.04	W 104 9 46.51
	11200.00	90.53	181.13	7736.85	4507.85	3742.24	-3741.51	-73.86	0.00	388529.83	552786.15	N 32 4 5.05	W 104 9 46.54
	11300.00	90.53	181.13	7735.92	4506.92	3842.23	-3841.48	-75.84	0.00	388429.86	552784.17	N 32 4 4.06	W 104 9 46.56
	11400.00	90.53	181.13	7734.99	4505.99	3942.23	-3941.46	-77.81	0.00	388329.89	552782.20	N 32 4 3.07	W 104 9 46.59
	11500.00	90.53	181.13	7734.05	4505.05	4042.22	-4041.44	-79.79	0.00	388229.93	552780.22	N 32 4 2.08	W 104 9 46.61
	11600.00	90.53	181.13	7733.12	4504.12	4142.22	-4141.41	-81.76	0.00	388129.96	552778.24	N 32 4 1.09	W 104 9 46.64
	11700.00	90.53	181.13	7732.19	4503.19	4242.21	-4241.39	-83.74	0.00	388029.99	552776.27	N 32 4 0.10	W 104 9 46.66
	11800.00	90.53	181.13	7731.26	4502.26	4342.21	-4341.36	-85.72	0.00	387930.03	552774.29	N 32 3 59.11	W 104 9 46.68
	11900.00	90.53	181.13	7730.33	4501.33	4442.21	-4441.34	-87.69	0.00	387830.06	552772.31	N 32 3 58.12	W 104 9 46.71
	12000.00	90.53	181.13	7729.40	4500.40	4542.20	-4541.32	-89.67	0.00	387730.09	552770.34	N 32 3 57.14	W 104 9 46.73
	12100.00	90.53	181.13	7728.47	4499.47	4642.20	-4641.29	-91.65	0.00	387630.12	552768.36	N 32 3 56.15	W 104 9 46.76
	12200.00	90.53	181.13	7727.54	4498.54	4742.19	-4741.27	-93.63	0.00	387530.16	552766.38	N 32 3 55.16	W 104 9 46.78
	12300.00	90.53	181.13	7726.60	4497.60	4842.19	-4841.24	-95.60	0.00	387430.19	552764.41	N 32 3 54.17	W 104 9 46.81
	12400.00	90.53	181.13	7725.67	4496.67	4942.18	-4941.22	-97.58	0.00	387330.22	552762.43	N 32 3 53.18	W 104 9 46.83
	12472.25	90.53	181.13	7725.00	4496.00	5014.43	-5013.45	-99.01	0.00	387258.00	552761.00	N 32 3 52.46	W 104 9 46.85

Survey Type: Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	0.000	7040.000		1/100.000	30.000	30.000	SLB_MWD-STD
	7040.000	12472.247		1/100.000	30.000	30.000	SLB_MWD-STD
							Pilot Hole / Chevron Sken 2-26-27 State 2H Pilot Rev0 mcs
							ST01 / Chevron Sken 2-26-27 State 2H ST01 Rev1 mcs