

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-015-44411
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name TURKEY TRACK 4 3 STATE
8. Well Number 23H
9. OGRID Number 192462
10. Pool name or Wildcat TURKEY TRACK; BONE SPRING

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐
2. Name of Operator
OXY USA WTP LP
3. Address of Operator
PO BOX 4294, HOUSTON, TX 77210

4. Well Location
Unit Letter: L : 1435 feet from the SOUTH line and 360 feet from the WEST line
Section 4 Township 19S Range 29E NMPM County EDDY

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3406' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☒	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL. ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

OXY USA WTP LP respectfully requests to change the well number of the Turkey Track 4 3 State #23H, API No. 30-015-44411, to the Turkey Track 4 3 State #33H and amend the APD with the following changes:

1. Change target formation from 2nd Bone Spring Sand to 3rd Bone Spring Sand. New plat and directional plan are attached.
2. Amend casing and cementing details to accommodate new target.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE: Sarah Chapman TITLE: REGULATORY SPECIALIST DATE: 05/15/2018

Type or print name: SARAH CHAPMAN E-mail address: SARAH.CHAPMAN@OXY.COM PHONE: 713-350-4997

For State Use Only

APPROVED BY: Rusty Hume TITLE: Business Spec A DATE: 5-16-2018

Conditions of Approval (if any):

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Bravos Road, Artesia, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☒ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-4411	Pool Code 60660	Pool Name Turkey Track; Bone Spring
Property Code 318404	Property Name TURKEY TRACK "4-3" STATE	Well Number 33H
OGRID No. 192463	Operator Name OXY USA INC. WTP UP	Elevation 3406.4'

Surface Location


UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	4	19 SOUTH	29 EAST, N.M.P.M.		1435'	SOUTH	360'	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	3	19 SOUTH	29 EAST, N.M.P.M.		1894'	SOUTH	180'	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
320	4		

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

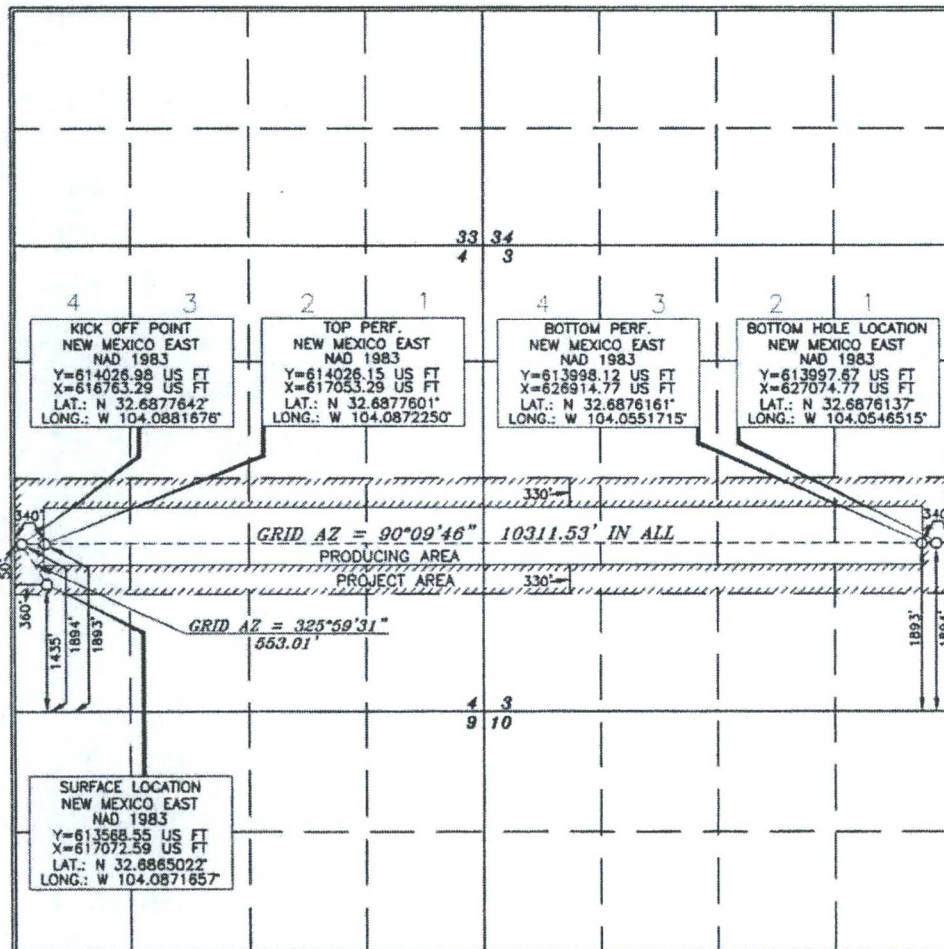

OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: **Justin Morris** Date: **4-3-18**
Printed Name: **Justin Morris**
E-mail Address: **Justin.Morris@oxy.com**

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey: **JUNE 29, 2017**
Signature and Seal of Professional Surveyor: **Tony D. Paul**
Certificate Number: **15079**

WO# 170629WL-a (KA)

Oxy USA Inc. - Turkey Track 4-3 State 33H; API: 30-015-44411

1. Casing Program

Hole Size (in)	Casing Interval		Csg. Size (in)	Weight (lbs)	Grade	Conn.	Buoyant			
	From (ft)	To (ft)					SF Collapse	SF Burst	Body SF Tension	Joint SF Tension
17.5	0	400	13.375	54.5	J55	BTC	1.125	1.2	1.4	1.4
12.25	0	2995	9.625	36	J55	BTC	1.125	1.2	1.4	1.4
8.5	0	18823	5.5	20	P110	DQX	1.125	1.2	1.4	1.4
SF Values will meet or Exceed										

2. Cementing Program

Cement volumes changed due to the change in MD.

Casing String	# Sks	Wt. (lb/gal)	Yld (ft3/sack)	H2O (gal/sk)	500# Comp. Strength (hours)	Slurry Description
Surface Lead	N/A	N/A	N/A	N/A	N/A	N/A
Surface Tail	432	14.8	1.33	6.365	5:26	Class C Cement, Accelerator
Intermediate Lead	843	12.9	1.73	8.784	15:26	Pozzolan Cement, Retarder
Intermediate Tail	156	14.8	1.33	6.368	7:11	Class C Cement, Accelerator
Production Lead	1026	11.9	2.24	12.327	14:46	Class H Cement, Retarder, Dispersant, Salt
Production Tail	2125	13.2	1.38	6.686	3:49	Class H Cement, Retarder, Dispersant, Salt

Casing String	Top (ft)	Bottom (ft)	% Excess
Surface Lead	N/A	N/A	N/A
Surface Tail	0	400	100%
Intermediate Lead	0	2495	100%
Intermediate Tail	2495	2995	20%
Production Lead	2495	7715	100%
Production Tail	7715	18823	15%

Schlumberger

Oxy Turkey Track 4-3 State 33H Rev0 smk 04Apr18 Proposal Geodetic



Report
(Def Plan)

Report Date: April 07, 2018 - 05:12 PM
Client: OXY
Field: NM Eddy County (NAD 83)
Structure / Shot: Oxy Turkey Track 4-3 State 33H / Oxy Turkey Track 4-3 State 33H
Well: Oxy Turkey Track 4-3 State 33H
Borehole: Original Borehole
LWI / APH: Unknown / Unknown
Survey Name: Oxy Turkey Track 4-3 State 33H Rev0 smk 04Apr18
Survey Date: April 04, 2018
Tori / AHD / DOI / ERD Ratio: 102.463 / 10821.350 N / 6.371 / 1.219
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 41' 11.40788" W 104° 5' 13.79648"
CRS Grid Convergence Angle: N 613568.550 (US, E 617072.590 (US)
Grid Scale Factor: 0.1329°
Version / Patch: 0.99991566
2.10.715.0

Survey / DLS Computation:
Vertical Section Depth: Minimum Convergence / Lubinski
Vertical Section Origin: 87.543° (Grid North)
TVD Reference Datum: 0.000 ft, 0.000 ft
Seabed / Ground Elevation: RXG-26.3
Magnetic Declination: 3404.600 ft above MSL
Total Gravity Field Strength: 3404.100 ft above MSL
Gravity Model: 7.414
Total Magnetic Field Strength: 698.514 mGauss (0.8065 Gauss)
Magnetic Dip Angle: GARM
Declination Date: 48110.436 nT
Magnetic Declination Model: 60.493°
North Reference: April 04, 2018
Grid Convergence Used: HDGM 2018
Total Corr Mag North->Grid: Grid North
North: 0.1329°
Local Coord Referenced To: 7.2811°
Well Head

Comments	MD	Incl	Azim Grid	TVD	VSEC	NS	EW	DLS	Northing	Easting	Latitude	Longitude
SHL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	100.00	0.00	318.84	100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	200.00	0.00	318.84	200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	300.00	0.00	318.84	300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	400.00	0.00	318.84	400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	500.00	0.00	318.84	500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	600.00	0.00	318.84	600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	700.00	0.00	318.84	700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	800.00	0.00	318.84	800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	900.00	0.00	318.84	900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1000.00	0.00	318.84	1000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1100.00	0.00	318.84	1100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1200.00	0.00	318.84	1200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1300.00	0.00	318.84	1300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1400.00	0.00	318.84	1400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1500.00	0.00	318.84	1500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1600.00	0.00	318.84	1600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1700.00	0.00	318.84	1700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1800.00	0.00	318.84	1800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	1900.00	0.00	318.84	1900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2000.00	0.00	318.84	2000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2100.00	0.00	318.84	2100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2200.00	0.00	318.84	2200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2300.00	0.00	318.84	2300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2400.00	0.00	318.84	2400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2500.00	0.00	318.84	2500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2600.00	0.00	318.84	2600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2700.00	0.00	318.84	2700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2800.00	0.00	318.84	2800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	2900.00	0.00	318.84	2900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3000.00	0.00	318.84	3000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3100.00	0.00	318.84	3100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3200.00	0.00	318.84	3200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3300.00	0.00	318.84	3300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3400.00	0.00	318.84	3400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3500.00	0.00	318.84	3500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3600.00	0.00	318.84	3600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3700.00	0.00	318.84	3700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3800.00	0.00	318.84	3800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	3900.00	0.00	318.84	3900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4000.00	0.00	318.84	4000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4100.00	0.00	318.84	4100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4200.00	0.00	318.84	4200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4300.00	0.00	318.84	4300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4400.00	0.00	318.84	4400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4500.00	0.00	318.84	4500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4600.00	0.00	318.84	4600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4700.00	0.00	318.84	4700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4800.00	0.00	318.84	4800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	4900.00	0.00	318.84	4900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5000.00	0.00	318.84	5000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5100.00	0.00	318.84	5100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5200.00	0.00	318.84	5200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5300.00	0.00	318.84	5300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5400.00	0.00	318.84	5400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5500.00	0.00	318.84	5500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5600.00	0.00	318.84	5600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5700.00	0.00	318.84	5700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5800.00	0.00	318.84	5800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	5900.00	0.00	318.84	5900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6000.00	0.00	318.84	6000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6100.00	0.00	318.84	6100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6200.00	0.00	318.84	6200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6300.00	0.00	318.84	6300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6400.00	0.00	318.84	6400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6500.00	0.00	318.84	6500.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6600.00	0.00	318.84	6600.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6700.00	0.00	318.84	6700.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6800.00	0.00	318.84	6800.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	6900.00	0.00	318.84	6900.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7000.00	0.00	318.84	7000.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7100.00	0.00	318.84	7100.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7200.00	0.00	318.84	7200.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7300.00	0.00	318.84	7300.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7400.00	0.00	318.84	7400.00	0.00	0.00	0.00	0.00	613568.55	617072.59	N 32 41 11.41	W 104 5 13.80
	7500.00	0.00	318.84	7500.00	0.00	0.00	0.00					

[illegible]

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ° °)	Longitude (E/W ° ° °)
	18100.00	89.07	90.16	8866.29	9290.77	431.12	6280.82	0.00	613998.63	626352.81	N 32 41 15.45	W 104 3 25.20
	18200.00	89.07	90.16	8867.91	9390.68	430.85	9380.81	0.00	613999.36	626452.59	N 32 41 15.44	W 104 3 24.03
	18300.00	89.07	90.16	8869.53	9490.54	430.58	9480.80	0.00	613999.09	626552.57	N 32 41 15.44	W 104 3 22.86
	18400.00	89.07	90.16	8871.15	9590.42	430.30	9580.78	0.00	613998.82	626652.55	N 32 41 15.43	W 104 3 21.69
	18500.00	89.07	90.16	8872.77	9690.30	430.03	9680.77	0.00	613998.55	626752.52	N 32 41 15.43	W 104 3 20.52
	18600.00	89.07	90.16	8874.40	9790.19	429.76	9780.76	0.00	613998.27	626852.50	N 32 41 15.42	W 104 3 19.35
	18700.00	89.07	90.16	8876.02	9890.07	429.49	9880.74	0.00	613998.00	626952.48	N 32 41 15.42	W 104 3 18.18
	18800.00	89.07	90.16	8877.64	9989.95	429.22	9980.73	0.00	613997.73	627052.46	N 32 41 15.41	W 104 3 17.01
Turkey Track 4-3 State 33H PBHL	18822.32	89.07	90.16	8878.00	10012.25	429.16	10003.04	0.00	613997.67	627074.77	N 32 41 15.41	W 104 3 16.75

Survey Type: Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Type	Borehole / Survey
	1	0.000	26.500	1/100.000	30.000	30.000		NAL_MWD_PLUS_0.5_DEG- Depth Only	Original Borehole / Oxy Turkey Track 4-3 State 33H Rev0 smk 04Apr18
	1	26.500	18822.318	1/100.000	30.000	30.000		NAL_MWD_PLUS_0.5_DEG	Original Borehole / Oxy Turkey Track 4-3 State 33H Rev0 smk