

Form 3160-5
(November 1983)
(Formerly 9-331)

UNITED STATES **Artesia, NM 88220**
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Form approved,
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different depth.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. ☐ OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR
McClellan Oil Corporation

3. ADDRESS OF OPERATOR
P.O. Drawer 730 Roswell, NM 88202 622-3200

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface
660' FNL & 660' FWL

RECEIVED
FEB - 7 1991

O. C. D.
ARTESIA, OFFICE

5. LEASE DESIGNATION AND SERIAL NO.
NM-51077

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Allen Federal

9. WELL NO.
#1

10. FIELD AND POOL, OR WILDCAT
Pecos Slope ABO

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 7-T10S-R26E

12. COUNTY OR PARISH
Chaves

13. STATE
NM

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3733' GL

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ PULL OR ALTER CASING ☐
FRACTURE TREAT ☐ MULTIPLE COMPLETE ☐
SHOOT OR ACIDIZE ☐ ABANDON* ☐
REPAIR WELL ☐ CHANGE PLANS ☐

WATER SHUT-OFF ☐ REPAIRING WELL ☐
FRACTURE TREATMENT ☐ ALTERING CASING ☐
SHOOTING OR ACIDIZING ☐ ABANDONMENT* ☐
(Other) ☐

(Other) Spudding & setting 8 5/8 csg.


(NOTE: Report results of multiple completion on Well Completion or Reconpletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

1/23/91 Spudded well with 12 1/4" bit.

1/25/91 TD surface at 900'. Ran 21 Jts of 8 5/8" 24# csg to 895". Cmted using Halliburton w/260 sx Lite 2% CaCl & 200 sx Class "C" 2% CaCl. Circulated 50 sx W.O.C. - 18 hrs. Tested BOPs to 2000 PSI (holding).

1/26/91 Drlg out with 7 7/8" bit.

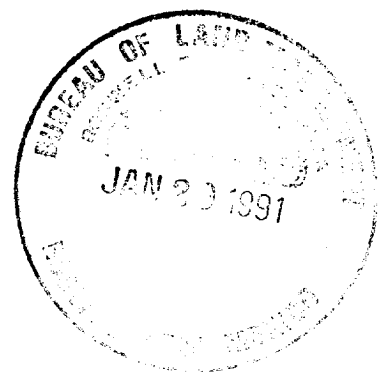

18. I hereby certify that the foregoing is true and correct

SIGNED [Signature] TITLE Drlg & Comp. Engineer

DATE 1/28/91

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

RECORDS
FELIX W. CHESTER
DATE _____

JAN 29 1991

BUREAU OF LAND MANAGEMENT
ROSWELL, NEW MEXICO

*See Instructions on Reverse Side

1000000

1000000

1000000