

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
311 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION (505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1610' FNL & 1980' FWL of Section 15-T8S-R25E (Unit F, SENW)

5. Lease Designation and Serial No.

NM-27061

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Crosby TV Federal #2

9. API Well No.

30-005-63218

10. Field and Pool, or Exploratory Area

Pecos Slope Abo

11. County or Parish, State

Chaves Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Production casing & cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Reduced hole to 7-7/8" at 1500'.

TD 5308'. Reached TD at 1:00 AM 2-16-2000. Ran 125 joints of 5-1/2" 15.5# J-55 (5330') of casing set at 5308'. Float shoe set at 5308'. Float collar set at 5266'. Cemented with 685 sacks Ultra Lite C, 1#/sack D44, 5#/sack D42, .5% D65, .35% D59 and .2% D46 (yield 1.69, weight 13.0). PD 4:15 PM 2-17-2000. Bumped plug to 1300 psi, OK. Cement did not circulate. WOC. NOTE: Displaced casing with 2% KCL. Released rig at 10:15 PM 2-17-2000.

Waiting on completion unit.

RECEIVED
OCC ARTESIA

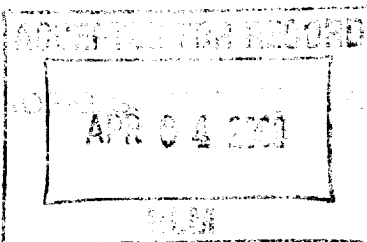

14. I hereby certify that the foregoing is true and correct

Signed Rusty Klein Title Operations Technician Date March 23, 2000

(This space for Federal or State office use)

Approved by _____ Title _____ Date _____
Conditions of approval, if any: