

Results of Directional Survey

API number:	30-025-40380		
OGRID:		Operator:	TEXLAND PETTROLEUM-HOBBS, LLC
		Property:	RLF TRUST 25 FEDERAL COM # 1H

surface	ULSTR:	A	25	T	16S	R	38E
				660	FNL	330	FEL

BH Loc	ULSTR:	D	25	T	16S	R	38E
12796	MD	8241.5	TVD	426	FNL	340	FWL
						4940	FEL

Top Perf/OH	ULSTR:	A	25	T	16S	R	38E
8902	MD	8245.5	TVD	633	FNL	1053	FEL

Bot Perf/OH	ULSTR:	D	25	T	16S	R	38E
12504	MD	8242.8	TVD	445	FNL	631	FWL
						4649	FEL

	MD	N/S	E/W	VD
	8887	26.52	-707.69	8245.63
TOP PERFS/OH	8902	27.45	-722.66	8245.48
	8919	28.50	-739.63	8245.31
	12490	214.36	-4304.86	8242.64
BOT PERFS/OH	12504	215.45	-4318.82	8242.80
	12522	216.84	-4336.76	8243.01

NEXT TO LAST	12743	230.85	-4557.29	8242.38
LAST READING	12796	233.85	-4610.20	8241.52
TD	12796	233.85	-4610.20	8241.52

Surface Location	660	FN	330	FE
Projected BHL	426	FN	4940	FE
Location of				
Top Perfs/OH	633	FN	1053	FE
Bottom Perfs/OH	445	FN	4649	FE

SUMMARY of Subsurface Locations

Surface Location	A-25-16S-38E	660	FN	330	FE	Vert. Depth
Top Perfs/OH	A-25-16S-38E	633	FN	1053	FE	8245.48
Bottom Perfs/OH	D-25-16S-38E	445	FN	4649	FE	8242.80
Projected TD	D-25-16S-38E	426	FN	4940	FE	8241.52

JUN 07 2012

HOBBS OCD

MAY 23 2012

TEXLAND PETROLEUM

RECEIVED

East Garrett Drinkard
Lea County, NM
RLF Trust 25 Federal Com #1H
VH - Job #32K0212162

Survey: Gyro

SDI Standard Survey Report


This survey is correct to the best of my knowledge and is supported by actual field data.

Hehaston

Notarized this date 15th of March, 2012.

Carrie Reed

Notary Signature
County of Midland
State of Texas

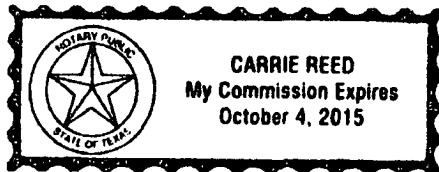

Scientific Drilling International, Inc.

SDI Standard Survey Report



Company:	TEXLAND PETROLEUM	Local Co-ordinate Reference:	Well RLF Trust 25 Federal Com #1H
Project:	East Garrett Drinkard	TVD Reference:	WELL @ 0 0usft (Original Well Elev)
Site:	Lea County, NM	MD Reference:	WELL @ 0 0usft (Original Well Elev)
Well:	RLF Trust 25 Federal Com #1H	North Reference:	Grid
Wellbore:	VH - Job #32K0212162	Survey Calculation Method:	Minimum Curvature
Design:	VH - Job #32K0212162	Database:	EDM-Regulatory

Project	East Garrett Drinkard		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Lea County, NM		
Site Position:		Northing:	693,576 25 usft
From:	Lat/Long	Easting:	873,601 30 usft
Position Uncertainty:	0 0 usft	Slot Radius:	13-3/16"
		Latitude:	32° 54' 2 858 N
		Longitude:	103° 6' 58 086 W
		Grid Convergence:	0 66 °

Well	RLF Trust 25 Federal Com #1H, Directional (Weatherford)		
Well Position	+N/-S	0 0 usft	Northing: 692,599 21 usft
	+E/-W	0 0 usft	Easting: 880,846 57 usft
Position Uncertainty	0 0 usft	Wellhead Elevation:	usft
		Latitude:	32° 53' 52 357 N
		Longitude:	103° 5' 33 259 W
		Ground Level:	0 0 usft

Wellbore	VH - Job #32K0212162				
Magnetics	Model Name	Sample Date	Declination	Dip Angle	Field Strength
			(°)	(°)	(nT)
	IGRF2010	2/14/2012	7 33	60 87	49,033

Design	VH - Job #32K0212162			
Audit Notes:				
Version:	1 0	Phase:	ACTUAL	Tie On Depth: 0 0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W	Direction
	(usft)	(usft)	(usft)	(°)
	0 0	0 0	0 0	272 82

Survey Program	Date 3/15/2012			
From	To	Survey (Wellbore)	Tool Name	Description
(usft)	(usft)			
100 0	7,977 0	Gyro (VH - Job #32K0212162)	Keeper	Keeper Surface Readout

Survey							
Measured Depth	Inclination	Azimuth	True Vertical	North/South	East/West	Closure Azimuth	Closure Distance
(usft)	(°)	(°)	Depth	(usft)	(usft)	(°)	(usft)
0 0	0 00	0 00	0 0	0 0	0 0	0 00	0 0
100 0	0 22	39 08	100 0	0 1	0 1	39 08	0 2
200 0	0 41	51 65	200 0	0 5	0 5	45 14	0 7
300 0	0 78	65 81	300 0	1 0	1 4	54 36	1 8
400 0	0 60	78 29	400 0	1 4	2 6	61 20	2 9
500 0	0 85	51 11	500 0	2 0	3 6	61 53	4 1
600 0	0 90	59 43	600 0	2 8	4 9	59 88	5 7
700 0	1 00	81 44	700 0	3 4	6 4	62 36	7 3
800 0	0 98	70 84	799 9	3 8	8 1	65 00	8 9
900 0	1 01	91 54	899 9	4 0	9 8	67 60	10 6
1,000 0	1 14	83 35	999 9	4 1	11 7	70 50	12 4
1,100 0	0 96	87 33	1,099 9	4 3	13 5	72 38	14 2

Scientific Drilling International, Inc.

SDI Standard Survey Report



Company:	TEXLAND PETROLEUM	Local Co-ordinate Reference:	Well RLF Trust 25 Federal Com #1H
Project:	East Garrett Drnkard	TVD Reference:	WELL @ 0 0usft (Original Well Elev)
Site:	Lea County, NM	MD Reference:	WELL @ 0 0usft (Original Well Elev)
Well:	RLF Trust 25 Federal Com #1H	North Reference:	Grid
Wellbore:	VH - Job #32K0212162	Survey Calculation Method:	Minimum Curvature
Design:	VH - Job #32K0212162	Database:	EDM-Regulatory

Survey							
Measured Depth (usft)	Inclination (°)	Azimuth (°)	True Vertical Depth	North/South (usft)	East/West (usft)	Closure Azimuth (°)	Closure Distance (usft)
1,200 0	1 37	86 48	1,199 9	4 4	15 5	74 18	16 1
1,300 0	1 30	95 29	1,299 8	4 4	17 8	76 25	18 4
1,400 0	1 22	111 57	1,399 8	3 9	20 0	79 03	20 3
1,500 0	1 11	119 61	1,499 8	3 0	21 8	82 16	22 0
1,600 0	0 93	115 83	1,599 8	2 2	23 4	84 70	23 5
1,700 0	1 12	107 37	1,699 8	1 5	25 0	86 52	25 1
1,800 0	1 33	119 04	1,799 7	0 7	27 0	88 58	27 0
1,900 0	1 35	120 68	1,899 7	-0 5	29 0	90 98	29 0
2,000 0	1 41	108 45	1,999 7	-1 5	31 2	92 73	31 2
2,100 0	1 29	133 14	2,099 7	-2 6	33 2	94 56	33 3
2,200 0	1 05	147 00	2,199 6	-4 2	34 5	96 91	34 8
2,300 0	1 08	153 82	2,299 6	-5 8	35 4	99 30	35 9
2,400 0	0 89	145 88	2,399 6	-7 3	36 3	101 36	37 0
2,500 0	0 95	161 02	2,499 6	-8 7	37 0	103 26	38 0
2,600 0	0 66	151 84	2,599 6	-10 0	37 5	104 93	38 8
2,700 0	0 66	166 86	2,699 6	-11 1	37 9	106 28	39 5
2,800 0	0 83	178 35	2,799 6	-12 4	38 1	107 99	40 0
2,900 0	0 74	177 97	2,899 6	-13 7	38 1	109 81	40 5
3,000 0	0 60	159 96	2,999 6	-14 9	38 3	111 21	41 1
3,100 0	0 39	185 87	3,099 5	-15 7	38 5	112 20	41 5
3,200 0	0 22	232 63	3,199 5	-16 2	38 3	112 88	41 5
3,300 0	0 28	227 32	3,299 5	-16 4	37 9	113 42	41 3
3,400 0	0 42	272 11	3,399 5	-16 6	37 4	113 92	40 9
3,500 0	0 38	267 51	3,499 5	-16 6	36 7	114 32	40 3
3,600 0	0 11	29 30	3,599 5	-16 5	36 4	114 40	40 0
3,700 0	0 19	24 99	3,699 5	-16 3	36 5	114 03	40 0
3,800 0	0 24	27 34	3,799 5	-15 9	36 7	113 49	40 0
3,900 0	0 35	13 28	3,899 5	-15 5	36 9	112 76	40 0
4,000 0	0 40	0 90	3,999 5	-14 8	36 9	111 86	39 8
4,100 0	0 50	22 62	4,099 5	-14 1	37 1	110 76	39 7
4,200 0	0 46	28 35	4,199 5	-13 3	37 5	109 56	39 8
4,300 0	0 43	25 90	4,299 5	-12 6	37 8	108 45	39 9
4,400 0	0 40	22 64	4,399 5	-12 0	38 1	107 42	40 0
4,500 0	0 47	26 31	4,499 5	-11 3	38 4	106 34	40 1
4,600 0	0 57	27 24	4,599 5	-10 5	38 8	105 07	40 2
4,700 0	0 68	30 62	4,699 5	-9 5	39 4	103 57	40 5
4,800 0	0 78	24 40	4,799 5	-8 4	40 0	101 84	40 8
4,900 0	0 65	6 00	4,899 5	-7 2	40 3	100 12	40 9
5,000 0	0 59	24 08	4,999 5	-6 2	40 6	98 63	41 0
5,100 0	0 72	39 13	5,099 5	-5 2	41 2	97 20	41 5
5,200 0	0 57	41 60	5,199 5	-4 3	41 9	95 91	42 1
5,300 0	0 81	46 00	5,299 5	-3 5	42 7	94 65	42 9
5,400 0	0 68	62 86	5,399 5	-2 7	43 8	93 55	43 9
5,500 0	0 86	63 52	5,499 5	-2 1	45 0	92 69	45 0

Scientific Drilling International, Inc.
SDI Standard Survey Report



Company:	TEXLAND PETROLEUM	Local Co-ordinate Reference:	Well RLF Trust 25 Federal Com #1H
Project:	East Garrett Drinkard	TVD Reference:	WELL @ 0 0usft (Original Well Elev)
Site:	Lea County, NM	MD Reference:	WELL @ 0 0usft (Original Well Elev)
Well:	RLF Trust 25 Federal Com #1H	North Reference:	Grid
Wellbore:	VH - Job #32K0212162	Survey Calculation Method:	Minimum Curvature
Design:	VH - Job #32K0212162	Database:	EDM-Regulatory

Survey							
Measured Depth (usft)	Inclination (°)	Azimuth (°)	True Vertical Depth	North/South (usft)	East/West (usft)	Closure Azimuth (°)	Closure Distance (usft)
5,600 0	0 75	61 56	5,599 4	-1 5	46 2	91 81	46 2
5,700 0	0 89	70 74	5,699 4	-0 9	47 5	91 08	47 5
5,800 0	0 72	75 20	5,799 4	-0 5	48 9	90 56	48 9
5,900 0	0 76	100 77	5,899 4	-0 4	50 1	90 51	50 1
6,000 0	0 65	88 50	5,999 4	-0 6	51 4	90 62	51 4
6,100 0	0 57	104 82	6,099 4	-0 7	52 4	90 73	52 4
6,200 0	0 63	122 95	6,199 4	-1 1	53 3	91 17	53 4
6,300 0	0 82	133 81	6,299 4	-1 9	54 3	91 99	54 4
6,400 0	0 71	121 29	6,399 4	-2 7	55 4	92 79	55 4
6,500 0	0 90	150 34	6,499 4	-3 7	56 3	93 77	56 4
6,600 0	0 64	149 26	6,599 4	-4 9	57 0	94 89	57 2
6,700 0	0 85	141 11	6,699 4	-5 9	57 7	95 86	58 0
6,800 0	0 76	139 76	6,799 3	-7 0	58 6	96 82	59 0
6,900 0	0 46	168 83	6,899 3	-7 9	59 1	97 62	59 6
7,000 0	0 31	184 08	6,999 3	-8 6	59 2	98 25	59 8
7,100 0	0 32	192 85	7,099 3	-9 1	59 1	98 77	59 8
7,200 0	0 34	233 52	7,199 3	-9 6	58 8	99 24	59 6
7,300 0	0 32	210 07	7,299 3	-10 0	58 4	99 70	59 3
7,400 0	0 28	223 67	7,399 3	-10 4	58 1	100 15	59 0
7,500 0	0 49	263 07	7,499 3	-10 6	57 5	100 47	58 5
7,600 0	0 35	232 33	7,599 3	-10 9	56 8	100 82	57 9
7,700 0	0 37	265 95	7,699 3	-11 1	56 3	101 14	57 4
7,800 0	0 66	276 00	7,799 3	-11 0	55 4	101 27	56 5
7,900 0	0 57	266 77	7,899 3	-11 0	54 3	101 46	55 4
7,977 0	0 53	270 03	7,976 3	-11 0	53 6	101 63	54 7



Project: East Garrett Drinkard
Lea County, NM
Well: RLF Trust 25 Federal Com #1H
Wellbore: VH - Job #32K0212162
Design: VH - Job #32K0212162




Azimuths to Grid North
True North -0.67°
Magnetic North 6.65°
Magnetic Field
Strength 49033 3snT
Dip Angle 60.87°
Date 2/14/2012
Model IGRF2010

WELL DETAILS: RLF Trust 25 Federal Com #1H
WELL @ 0.0usft (Original Well Elev)

Ground Level: 0.0

+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
0.0	0.0	692599.21	880846.57	32° 53' 52.357 N	103° 5' 33.259 W	

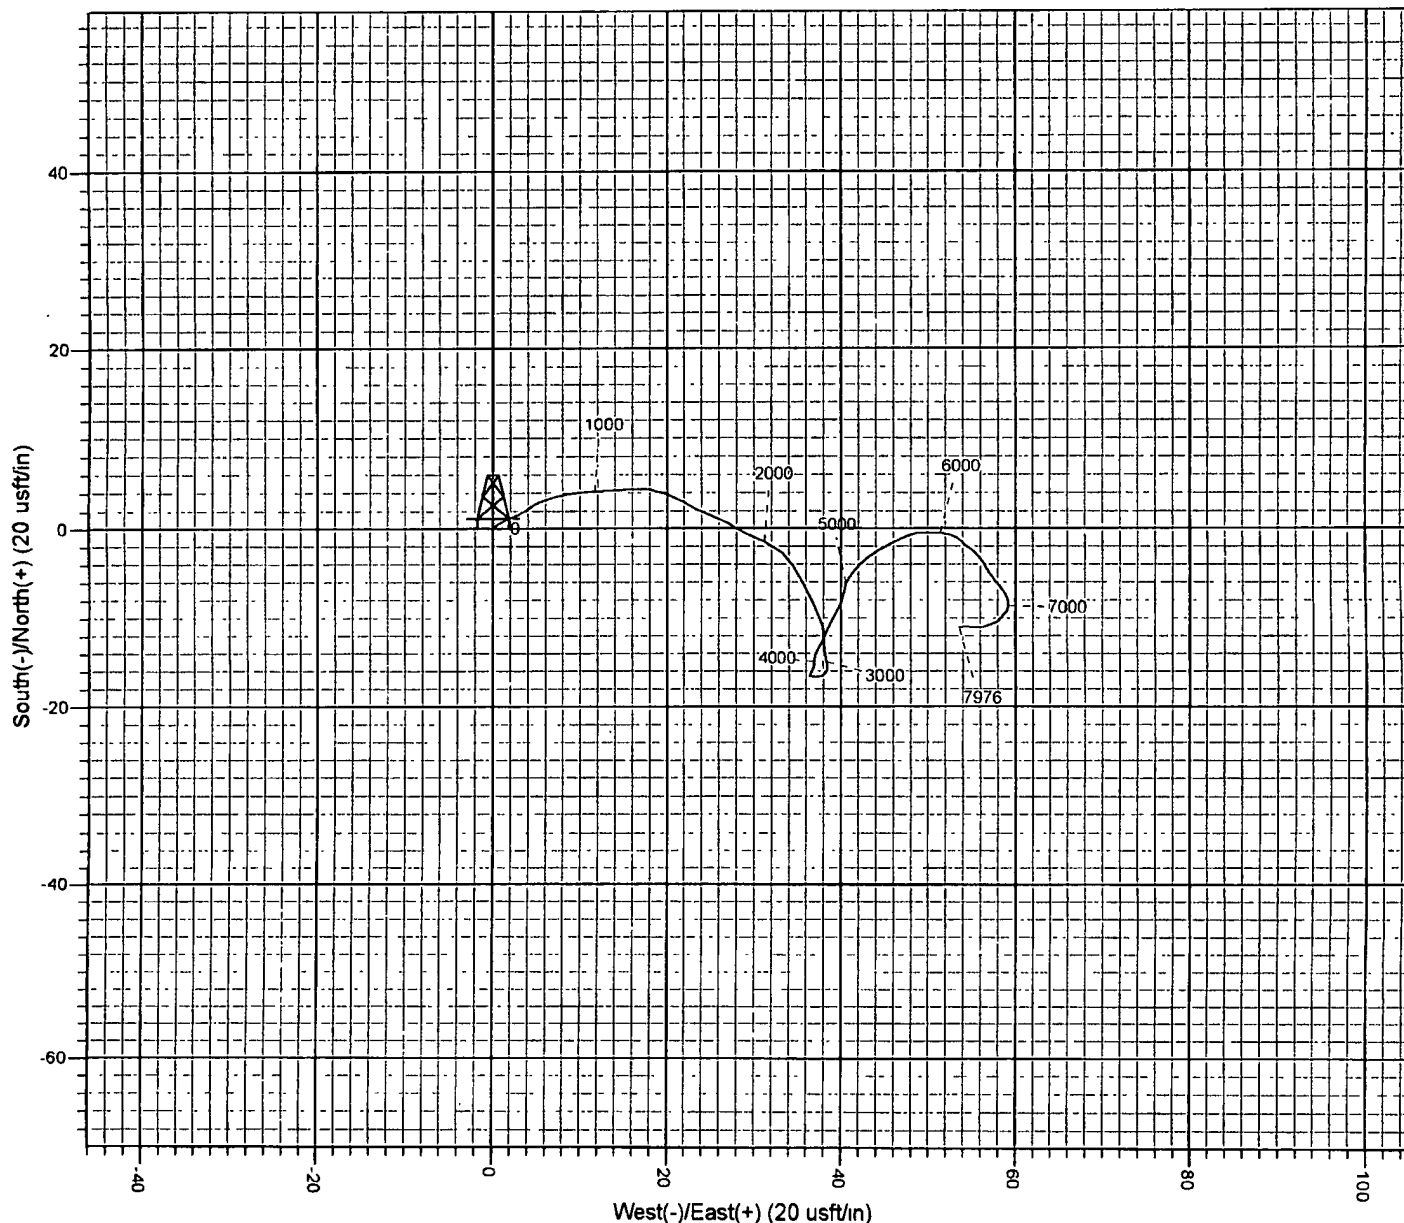

PROJECT DETAILS: East Garrett Drinkard
Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

SITE DETAILS: Lea County, NM
Site Centre Latitude: 32° 54' 2.858 N
Longitude: 103° 6' 58.086 W
Positional Uncertainty: 0.0
Convergence: 0.66
Local North: Grid



Weatherford

**DRILLING SERVICES
END OF WELL REPORT**

FOR

Greg Mendanhall

Texland Petroleum

RLF Trust 25 Fed Com #1H

Lea County, NM

HOBBS OCD

MAY 23 2012

RECEIVED

Weatherford Drilling Services job start date : 2-10-2012

Weatherford Drilling Services job end date : 2-25-2012

Presented By:


Damien Tarpley
Area Manager

Bug Anthony
Account Manager

Orry Armendariz
Directional Drilling Coordinator

Jesse Aguilar
MWD Coordinator

Key 555

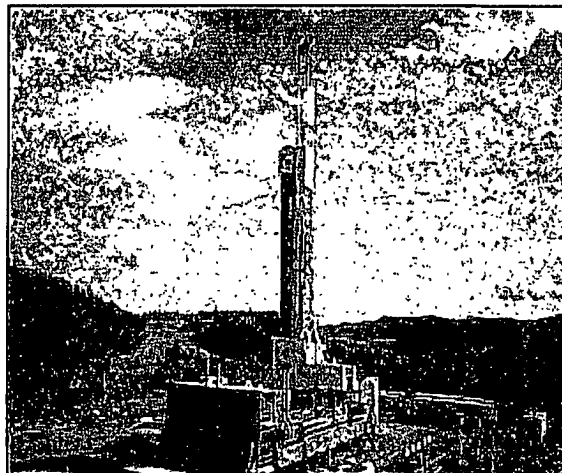



10000 West County Road 116
P.O. Box 61028
Midland, Texas 79711
Phone (432) 561-8892

February 28, 2012

Greg Mendanahall
777 Main St., Ste. 3200
Fort Worth, TX 76102

Reference Well Name : RLF Trust 25 Fed Com #1H
Location : Lea County, NM
Wft Job # : 4025570
Rig : Key 555

Dear Mr. Mendanahall

Thank you for allowing us the opportunity to provide our services on your RLF Trust 25 Fed Com #1H in Lea County, NM.

Please find the final End Of Well (EOW) report enclosed behind this coverletter.

The EOW report contains the following information :

Section 1 - Weatherford (Wft) Final Definitive Survey & 8.5" x 11".

* Note: This survey contains the Directional Survey's obtained by Weatherford Drilling Services via Weatherford MWD Services, and any gyro survey needed for Tie On (if required).

Section 2- Days vs. Feet Drilled (24 hrs) and Days vs. Depth Graphs

Section 3- Wft Gamma Logs

Section 4 - Wft Final BHA reports (BHA Graphic Reports, BHA Detail Reports, Motor Evaluation Reports, and BHA Slide Reports).

Section 5 - Wft Final Daily Drilling reports.

Section 6 - Wft Personnel list with contact numbers.

We at *Weatherford Drilling Services'* understand the importance of this project to you and hope that you were satisfied with our Directional Drilling and MWD services provided.

Please feel free to contact me if you have any questions.

Sincerely,

Damien Tarpley
Area Manager
Weatherford Drilling Services



Weatherford

Texland Petroleum
RLF Trust 25 Fed Com #1H
Lea County, NM

Section 1

Weatherford (Wft) Final Definitive

Plot & Survey

Texland Petroleum L.P.

RLF Trust 25 Federal Com #1H Lea Co, NM

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	7977.00	0.53	270.03	7976.31	-11.05	53.55	0.00	0.00	-54.03	
2	8003.00	0.53	270.03	8001.31	-11.05	53.52	0.00	0.00	-53.80	
3	8017.00	2.53	275.90	8016.30	-11.02	52.92	13.33	6.28	-53.40	
4	8021.80	2.53	275.00	8021.30	-11.00	52.70	0.00	0.00	-53.18	
5	8387.16	90.00	272.91	8150.00	1.52	-185.99	23.95	-2.08	185.83	
6	12835.23	90.00	272.91	8150.00	227.78	-4618.20	0.00	0.00	4613.80	Publ

SITE DETAILS

RLF Trust 25 Federal Com #1H
Site Centre Northing: 692599.20
Easting: 880846.40
Ground Level: 3684.00
Positional Uncertainty: 0.00
Convergence: 0.67

FIELD DETAILS

Lea Co, NM (Nad 27)

Geodetic System: US State Plane Coordinate System 1927
Ellipsoid: NAD27 (Clarke 1866)
Datum: New Mexico, Eastern Zone
Magnetic Model: IGRF2010

System Datum: Mean Sea Level
Local North: Grid North

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
25 Fed Com #1H	0.00	0.00	692599.20	880846.40	32°53'52.357N	103°05'33.261W	N/A



TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
PP	8150.00	12.32	-250.19	692611.52	880596.21	Point
Publ	8150.00	227.78	-4618.20	692816.90	876218.20	Point



Azimuths to Grid North
True North: -0.67°
Magnetic North: 6.66°
Magnetic Field
Strength: 49019uT
Dip Angle: 60.88°
Date: 1/25/2012
Model: IGRF2010


Total Correction to Grid North: 6.66°

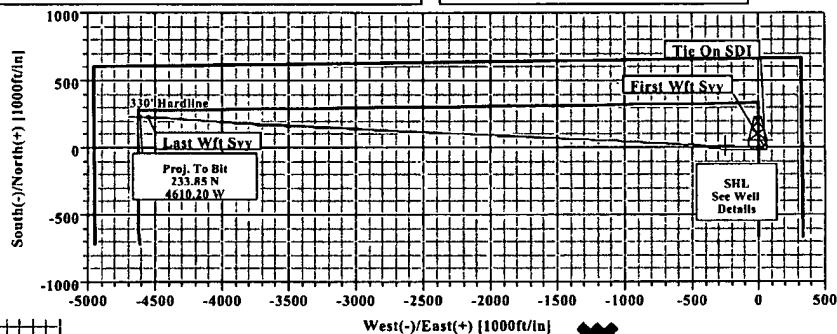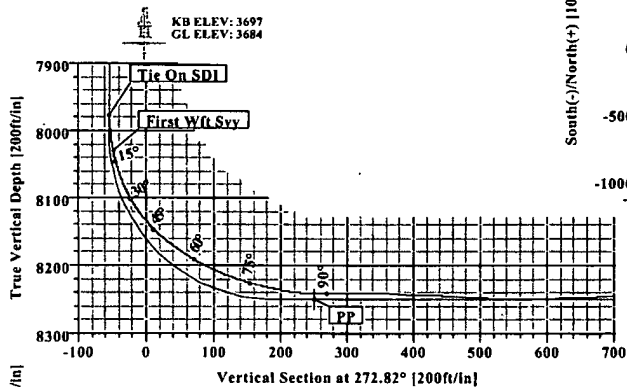

Weatherford

Survey: Wft Svy (25 Fed Com #1H/1)

No	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec
152	12796.00	90.94	273.24	8241.52	133.85	-4610.20	0.00	0.00	4616.12

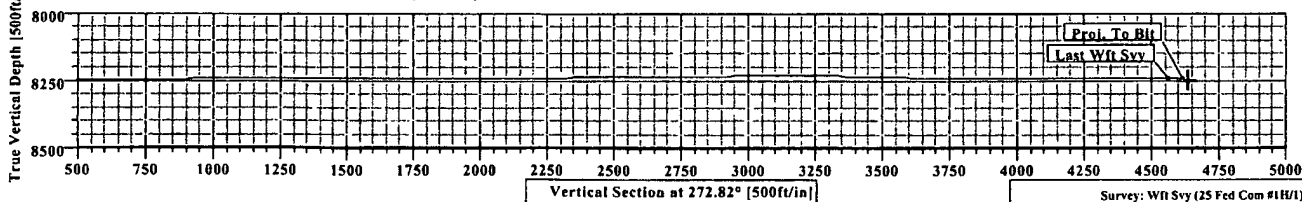

Survey: Wft Svy (25 Fed Com #1H/1)

Created By: Russell W. Joyner

Date: 2/26/2012

Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Texland Petroleum L.P.		Date: 2/26/2012	Time: 13:31:14	Page: 1
Field: Lea Co, NM (Nad 27)		Co-ordinate(NE) Reference: Well: 25 Fed Com #1H, Grid North		
Site: RLF Trust 25 Federal Com #1H		Vertical (TVD) Reference: SITE 3697.0		
Well: 25 Fed Com #1H		Section (VS) Reference: Well (0.00N,0.00E,272.82Azi)		
Wellpath: 1		Survey Calculation Method: Minimum Curvature Db: Sybase		

Survey: Wft Svy	Start Date: 2/20/2012
Company: Weatherford International Ltd.	Engineer: Russell W. Joyner
Tool: MWD;MWD - Standard	Tied-to: User Defined

Field: Lea Co, NM (Nad 27)	
Map System: US State Plane Coordinate System 1927	Map Zone: New Mexico, Eastern Zone
Geo Datum: NAD27 (Clarke 1866)	Coordinate System: Well Centre
Sys Datum: Mean Sea Level	Geomagnetic Model: IGRF2010

Site: RLF Trust 25 Federal Com #1H	
Site Position:	Northings: 692599.20 ft
From: Map	Easting: 880846.40 ft
Position Uncertainty: 0.00 ft	Latitude: 32 53 52.357 N
Ground Level: 3684.00 ft	Longitude: 103 5 33.261 W
	North Reference: Grid
	Grid Convergence: 0.67 deg

Well: 25 Fed Com #1H		Slot Name:	
Well Position: +N/-S 0.00 ft	Northings: 692599.20 ft	Latitude: 32 53 52.357 N	
+E/-W 0.00 ft	Easting: 880846.40 ft	Longitude: 103 5 33.261 W	
Position Uncertainty: 0.00 ft			

Wellpath: 1		Drilled From: Surface	
Current Datum: SITE	Height 3697.00 ft	Tie-on Depth: 0.00 ft	
Magnetic Data: 1/25/2012		Above System Datum: Mean Sea Level	
Field Strength: 49039 nT		Declination: 7.33 deg	
Vertical Section: Depth From (TVD)	+N/-S	Mag Dip Angle: 60.88 deg	
ft	ft	+E/-W	Direction
		ft	deg
0.00	0.00	0.00	272.82

Survey										
MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
7977.00	0.53	270.03	7976.31	-11.05	53.55	0.00	-54.03	692588.15	880899.95	Tie On SDI
8031.00	10.98	263.61	8029.96	-11.62	48.17	19.36	-48.69	692587.58	880894.57	First Wft Svy
8063.00	18.41	256.94	8060.90	-13.11	40.21	23.78	-40.81	692586.09	880886.61	
8094.00	26.48	257.56	8089.52	-15.71	28.68	26.04	-29.41	692583.49	880875.08	
8126.00	34.57	261.56	8117.07	-18.58	12.70	26.05	-13.60	692580.62	880859.10	
8158.00	43.16	265.28	8141.96	-20.82	-7.23	27.81	6.19	692578.38	880839.17	
8190.00	51.03	270.66	8163.74	-21.58	-30.62	27.49	29.52	692577.62	880815.78	
8221.00	56.99	267.45	8181.95	-22.02	-55.68	20.97	54.53	692577.18	880790.72	
8253.00	62.01	271.80	8198.19	-22.17	-83.23	19.57	82.04	692577.03	880763.17	
8284.00	67.66	271.61	8211.37	-21.34	-111.27	18.23	110.08	692577.86	880735.13	
8313.00	72.41	270.80	8221.27	-20.77	-138.51	16.59	137.32	692578.43	880707.89	
8345.00	76.91	268.16	8229.74	-21.05	-169.36	16.16	168.12	692578.15	880677.04	
8377.00	79.48	270.86	8236.28	-21.32	-200.68	11.52	199.38	692577.88	880645.72	
8408.00	84.28	274.61	8240.66	-19.85	-231.31	19.57	230.06	692579.35	880615.09	
8444.00	89.82	276.76	8242.51	-16.29	-267.07	16.50	265.95	692582.91	880579.33	
8476.00	91.92	276.03	8242.03	-12.72	-298.87	6.95	297.88	692586.48	880547.53	
8507.00	90.03	275.63	8241.50	-9.58	-329.70	6.23	328.83	692589.62	880516.70	
8539.00	87.94	276.36	8242.07	-6.23	-361.52	6.92	360.78	692592.97	880484.88	
8571.00	87.94	276.53	8243.22	-2.64	-393.30	0.53	392.69	692596.56	880453.10	
8602.00	88.64	276.63	8244.14	0.91	-424.08	2.28	423.61	692600.11	880422.32	
8634.00	86.12	275.75	8245.61	4.35	-455.86	8.34	455.52	692603.55	880390.54	
8666.00	86.19	275.53	8247.75	7.49	-487.63	0.72	487.41	692606.69	880358.77	
8697.00	88.43	275.23	8249.21	10.39	-518.46	7.29	518.34	692609.59	880327.94	
8729.00	89.48	274.95	8249.79	13.23	-550.33	3.40	550.31	692612.43	880296.07	

Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Textland Petroleum L.P.	Date: 2/26/2012	Time: 13:31:14	Page: 2
Field: Lea Co, NM (Nad 27)	Co-ordinate(NE) Reference:	Well: 25 Fed Com #1H, Grid North	
Site: RLF Trust 25 Federal Com #1H	Vertical (TVD) Reference:	SITE 3697.0	
Well: 25 Fed Com #1H	Section (VS) Reference:	Well (0.00N,0.00E,272.82Azi)	
Wellpath: 1	Survey,Calculation Method:	Minimum Curvature	Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
8760.00	90.87	274.62	8249.69	15.82	-581.22	4.61	581.29	692615.02	880265.18	
8792.00	91.43	274.81	8249.05	18.45	-613.10	1.85	613.27	692617.65	880233.30	
8823.00	92.00	274.98	8248.12	21.09	-643.98	1.92	644.23	692620.29	880202.42	
8855.00	92.62	275.27	8246.83	23.95	-675.82	2.14	676.18	692623.15	880170.58	
8887.00	91.71	273.96	8245.63	26.52	-707.69	4.98	708.14	692625.72	880138.71	
8919.00	89.41	273.15	8245.31	28.50	-739.63	7.62	740.13	692627.70	880106.77	
8950.00	89.34	273.01	8245.65	30.17	-770.58	0.50	771.13	692629.37	880075.82	
8982.00	89.62	273.18	8245.94	31.90	-802.53	1.02	803.13	692631.10	880043.87	
9014.00	90.24	273.31	8245.98	33.71	-834.48	1.98	835.13	692632.91	880011.92	
9045.00	90.59	273.45	8245.76	35.54	-865.43	1.22	866.13	692634.74	879980.97	
9077.00	90.87	273.45	8245.35	37.46	-897.37	0.87	898.12	692636.66	879949.03	
9109.00	91.29	273.70	8244.75	39.46	-929.30	1.53	930.11	692638.66	879917.10	
9140.00	91.78	273.74	8243.92	41.47	-960.22	1.59	961.10	692640.67	879886.18	
9172.00	92.69	273.88	8242.67	43.59	-992.13	2.88	993.07	692642.79	879854.27	
9204.00	89.90	273.18	8241.94	45.56	-1024.05	8.99	1025.06	692644.76	879822.35	
9235.00	88.50	272.67	8242.38	47.14	-1055.01	4.81	1056.05	692646.34	879791.39	
9267.00	88.77	272.67	8243.14	48.63	-1086.97	0.84	1088.04	692647.83	879759.43	
9299.00	89.13	272.45	8243.73	50.06	-1118.93	1.32	1120.04	692649.26	879727.47	
9330.00	89.41	272.79	8244.12	51.48	-1149.89	1.42	1151.03	692650.68	879696.51	
9362.00	89.55	272.88	8244.41	53.06	-1181.85	0.52	1183.03	692652.26	879664.55	
9394.00	89.75	272.92	8244.61	54.68	-1213.81	0.64	1215.03	692653.88	879632.59	
9425.00	90.10	272.89	8244.65	56.25	-1244.77	1.13	1246.03	692655.45	879601.63	
9457.00	90.24	272.81	8244.55	57.84	-1276.73	0.50	1278.03	692657.04	879569.67	
9489.00	90.38	272.72	8244.38	59.39	-1308.69	0.52	1310.03	692658.59	879537.71	
9520.00	90.59	273.10	8244.12	60.96	-1339.65	1.40	1341.03	692660.16	879506.75	
9552.00	90.80	272.98	8243.73	62.66	-1371.61	0.76	1373.03	692661.86	879474.79	
9583.00	91.01	273.02	8243.24	64.28	-1402.56	0.69	1404.02	692663.48	879443.84	
9615.00	91.57	273.04	8242.52	65.97	-1434.51	1.75	1436.02	692665.17	879411.89	
9647.00	90.74	272.53	8241.87	67.53	-1466.46	3.04	1468.01	692666.73	879379.94	
9678.00	91.15	272.60	8241.36	68.91	-1497.43	1.34	1499.00	692668.11	879348.97	
9710.00	90.10	272.22	8241.01	70.26	-1529.40	3.49	1531.00	692669.46	879317.00	
9741.00	88.92	272.02	8241.28	71.41	-1560.37	3.86	1562.00	692670.61	879286.03	
9773.00	89.06	271.83	8241.84	72.48	-1592.35	0.74	1593.99	692671.68	879254.05	
9805.00	89.48	271.57	8242.25	73.43	-1624.33	1.54	1625.98	692672.63	879222.07	
9836.00	90.10	272.39	8242.36	74.50	-1655.31	3.32	1656.97	692673.70	879191.09	
9868.00	90.52	272.48	8242.19	75.86	-1687.28	1.34	1688.97	692675.06	879159.12	
9900.00	90.87	272.44	8241.80	77.23	-1719.25	1.10	1720.97	692676.43	879127.15	
9932.00	91.50	272.23	8241.14	78.54	-1751.22	2.08	1752.96	692677.74	879095.18	
9963.00	91.15	272.78	8240.42	79.89	-1782.18	2.10	1783.95	692679.09	879064.22	
9995.00	90.10	272.73	8240.07	81.43	-1814.14	3.28	1815.95	692680.63	879032.26	
10026.00	88.36	273.09	8240.49	83.00	-1845.10	5.73	1846.95	692682.20	879001.30	
10058.00	88.57	273.13	8241.35	84.74	-1877.04	0.67	1878.94	692683.94	878969.36	
10089.00	88.77	273.01	8242.07	86.40	-1907.99	0.75	1909.93	692685.60	878938.41	
10121.00	89.06	273.01	8242.67	88.08	-1939.94	0.91	1941.92	692687.28	878906.46	
10152.00	89.27	273.05	8243.13	89.72	-1970.89	0.69	1972.92	692688.92	878875.51	
10184.00	89.76	273.10	8243.40	91.43	-2002.84	1.54	2004.92	692690.63	878843.56	
10216.00	90.18	273.19	8243.41	93.19	-2034.79	1.34	2036.91	692692.39	878811.61	
10248.00	90.38	273.06	8243.26	94.93	-2066.75	0.75	2068.91	692694.13	878779.65	
10279.00	90.52	272.48	8243.01	96.43	-2097.71	1.92	2099.91	692695.63	878748.69	
10310.00	90.73	272.34	8242.68	97.73	-2128.68	0.81	2130.91	692696.93	878717.72	
10342.00	90.87	272.27	8242.23	99.02	-2160.65	0.49	2162.91	692698.22	878685.75	
10374.00	91.29	272.19	8241.63	100.27	-2192.62	1.34	2194.90	692699.47	878653.78	

Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Texland Petroleum L.P. Field: Lea Co, NM (Nad 27) Site: RLF Trust 25 Federal Com #1H Well: 25 Fed Com #1H Wellpath: 1	Date: 2/26/2012 Co-ordinate(NE) Reference: Vertical (TVD) Reference: Section (VS) Reference: Survey Calculation Method:	Time: 13:31:14 Well: 25 Fed Com #1H, Grid North SITE 3697.0 Well (0.00N,0.00E,272.82Azi) Minimum Curvature	Page: 3 Db: Sybase
---	--	---	-------------------------------------

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
10405.00	90 17	271.66	8241.23	101.31	-2223.60	4.00	2225.89	692700.51	878622.80	
10437.00	90 38	271.38	8241.08	102.16	-2255.59	1.09	2257.88	692701.36	878590.81	
10468.00	90 94	271.19	8240.72	102.85	-2286.58	1.91	2288.87	692702.05	878559.82	
10500.00	91 65	271.14	8240.00	103.50	-2318.56	2.22	2320.85	692702.70	878527.84	
10532.00	90 66	272.57	8239.35	104.54	-2350.54	5.43	2352.84	692703.74	878495.86	
10563.00	90 59	272.77	8239.01	105.98	-2381.50	0.68	2383.83	692705.18	878464.90	
10595.00	91 01	272.69	8238.57	107.51	-2413.46	1.34	2415.83	692706.71	878432.94	
10627.00	91 50	272.73	8237.87	109.02	-2445.42	1.54	2447.82	692708.22	878400.98	
10658.00	91 71	272.60	8237.00	110.46	-2476.37	0.80	2478.81	692709.66	878370.03	
10690.00	92 06	272.74	8235.94	111.95	-2508.32	1.18	2510.79	692711.15	878338.08	
10721.00	91 01	273.03	8235.11	113.51	-2539.27	3.51	2541.78	692712.71	878307.13	
10753.00	90 66	273.06	8234.65	115.21	-2571.22	1.10	2573.78	692714.41	878275.18	
10785.00	90 03	272.61	8234.46	116.79	-2603.18	2.42	2605.78	692715.99	878243.22	
10816.00	88 57	272.63	8234.83	118.21	-2634.15	4.71	2636.77	692717.41	878212.25	
10848.00	88 64	272.41	8235.61	119.61	-2666.11	0.72	2668.76	692718.81	878180.29	
10879.00	89 13	272.64	8236.22	120.98	-2697.07	1.75	2699.76	692720.18	878149.33	
10911.00	89 41	272.64	8236.62	122.45	-2729.03	0.87	2731.75	692721.65	878117.37	
10943.00	89 76	272.77	8236.86	123.96	-2761.00	1.17	2763.75	692723.16	878085.40	
10974.00	90 10	272.90	8236.89	125.50	-2791.96	1.17	2794.75	692724.70	878054.44	
11006.00	90 31	272.94	8236.78	127.13	-2823.92	0.67	2826.75	692726.33	878022.48	
11038.00	90 74	273.04	8236.49	128.80	-2855.87	1.38	2858.75	692728.00	877990.53	
11069.00	91 29	273.20	8235.94	130.48	-2886.82	1.85	2889.75	692729.68	877959.58	
11101.00	91 71	273.45	8235.10	132.34	-2918.76	1.53	2921.73	692731.54	877927.64	
11132.00	91 92	273.49	8234.12	134.21	-2949.68	0.69	2952.72	692733.41	877896.72	
11164.00	92 34	274.09	8232.93	136.33	-2981.59	2.29	2984.69	692735.53	877864.81	
11196.00	92 48	273.51	8231.58	138.45	-3013.49	1.86	3016.66	692737.65	877832.91	
11227.00	89 97	272.62	8230.92	140.10	-3044.44	8.59	3047.65	692739.30	877801.96	
11259.00	89 90	272.35	8230.96	141.49	-3076.41	0.87	3079.65	692740.69	877769.99	
11291.00	89 97	272.12	8230.99	142.74	-3108.38	0.75	3111.64	692741.94	877738.02	
11322.00	90 31	272.26	8230.92	143.92	-3139.36	1.19	3142.64	692743.12	877707.04	
11354.00	90 60	272.26	8230.66	145.19	-3171.34	0.91	3174.64	692744.39	877675.06	
11386.00	89 62	272.51	8230.60	146.52	-3203.31	3.16	3206.64	692745.72	877643.09	
11417.00	90 03	272.25	8230.70	147.80	-3234.28	1.57	3237.64	692747.00	877612.12	
11449.00	88 48	272.54	8231.11	149.14	-3266.25	4.93	3269.63	692748.34	877580.15	
11480.00	87 38	272.81	8232.23	150.59	-3297.19	3.65	3300.61	692749.79	877549.21	
11512.00	87 66	272.82	8233.62	152.16	-3329.13	0.88	3332.58	692751.36	877517.27	
11543.00	87 80	272.56	8234.84	153.61	-3360.07	0.95	3363.56	692752.81	877486.33	
11575.00	88 01	272.62	8236.01	155.06	-3392.01	0.68	3395.53	692754.26	877454.39	
11606.00	88 42	272.54	8236.98	156.45	-3422.97	1.35	3426.52	692755.65	877423.43	
11638.00	89 13	272.29	8237.66	157.80	-3454.93	2.35	3458.51	692757.00	877391.47	
11670.00	89 20	272.25	8238.13	159.07	-3486.90	0.25	3490.51	692758.27	877359.50	
11701.00	89 27	272.21	8238.54	160.27	-3517.88	0.26	3521.50	692759.47	877328.52	
11733.00	88 99	272.38	8239.03	161.55	-3549.85	1.02	3553.50	692760.75	877296.55	
11764.00	89 20	272.59	8239.52	162.90	-3580.81	0.96	3584.49	692762.10	877265.59	
11796.00	89 76	272.59	8239.81	164.34	-3612.78	1.75	3616.49	692763.54	877233.62	
11828.00	89 97	272.81	8239.89	165.85	-3644.74	0.95	3648.49	692765.05	877201.66	
11859.00	90 03	272.93	8239.89	167.40	-3675.71	0.43	3679.49	692766.60	877170.69	
11891.00	90 66	273.07	8239.69	169.08	-3707.66	2.02	3711.49	692768.28	877138.74	
11923.00	88 99	273.73	8239.79	170.98	-3739.60	5.61	3743.49	692770.18	877106.80	
11954.00	88 85	273.48	8240.37	172.92	-3770.54	0.92	3774.48	692772.12	877075.86	
11986.00	88 85	273.55	8241.02	174.89	-3802.47	0.22	3806.47	692774.09	877043.93	
12018.00	89 06	273.52	8241.60	176.86	-3834.40	0.66	3838.46	692776.06	877012.00	
12049.00	89 20	273.76	8242.07	178.83	-3865.34	0.90	3869.45	692778.03	876981.06	

Weatherford International Ltd.

WFT Survey Report X & Y's



Weatherford

Company: Texland Petroleum L.P. Field: Lea Co, NM (Nad 27) Site: RLF Trust 25 Federal Com #1H Well: 25 Fed Com #1H Wellpath: 1	Date: 2/26/2012 Time: 13:31:14 Page: 4 Co-ordinate(NE) Reference: Well: 25 Fed.Com #1H, Grid North Vertical (TVD) Reference: SITE 3697.0 Section (VS) Reference: Well (0.00N,0.00E,272.82Azi) Survey Calculation Method: Minimum Curvature Db: Sybase
---	---

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	DLS deg/100ft	VS ft	MapN ft	MapE ft	Comment
12081.00	89.20	273.94	8242.52	180.97	-3897.26	0.56	3901.45	692780.17	876949.14	
12113.00	89.55	274.24	8242.87	183.26	-3929.18	1.44	3933.44	692782.46	876917.22	
12144.00	90.03	274.45	8242.98	185.61	-3960.09	1.69	3964.42	692784.81	876886.31	
12175.00	90.13	274.54	8242.94	188.04	-3990.99	0.43	3995.41	692787.24	876855.41	
12207.00	90.38	274.58	8242.79	190.58	-4022.89	0.79	4027.40	692789.78	876823.51	
12238.00	90.53	274.67	8242.55	193.08	-4053.79	0.56	4058.38	692792.28	876792.61	
12270.00	90.73	274.71	8242.20	195.70	-4085.68	0.64	4090.36	692794.90	876760.72	
12302.00	90.87	274.80	8241.75	198.35	-4117.57	0.52	4122.34	692797.55	876728.83	
12333.00	91.29	274.88	8241.17	200.96	-4148.45	1.38	4153.31	692800.16	876697.95	
12364.00	89.55	275.58	8240.94	203.79	-4179.32	6.05	4184.29	692802.99	876667.08	
12396.00	89.76	275.63	8241.13	206.91	-4211.17	0.67	4216.25	692806.11	876635.23	
12427.00	88.85	274.49	8241.51	209.65	-4242.04	4.71	4247.22	692808.85	876604.36	
12459.00	88.92	274.11	8242.13	212.05	-4273.95	1.21	4279.20	692811.25	876572.45	
12490.00	89.20	274.45	8242.64	214.36	-4304.86	1.42	4310.19	692813.56	876541.54	
12522.00	89.48	274.45	8243.01	216.84	-4336.76	0.87	4342.17	692816.04	876509.64	
12553.00	89.83	274.58	8243.19	219.28	-4367.66	1.20	4373.16	692818.48	876478.74	
12585.00	90.03	274.79	8243.23	221.90	-4399.55	0.91	4405.14	692821.10	876446.85	
12617.00	89.97	273.32	8243.23	224.16	-4431.47	4.60	4437.13	692823.36	876414.93	
12648.00	90.24	272.82	8243.18	225.82	-4462.43	1.83	4468.13	692825.02	876383.97	
12680.00	90.32	272.93	8243.02	227.42	-4494.39	0.43	4500.13	692826.62	876352.01	
12711.00	90.52	273.15	8242.79	229.07	-4525.34	0.96	4531.13	692828.27	876321.06	
12743.00	90.94	273.24	8242.38	230.85	-4557.29	1.34	4563.13	692830.05	876289.11	Last Wft Svy
12796.00	90.94	273.24	8241.52	233.85	-4610.20	0.00	4616.12	692833.05	876236.20	Proj. To Bit

Annotation

MD ft	TVD ft	
7977.00	7976.31	Tie On SDI
8031.00	8029.96	First Wft Svy
12743.00	8242.38	Last Wft Svy
12796.00	8241.52	Proj. To Bit