	ate of New Mexico	Form C-103
Office Energy, Min	erals and Natural Resources	Revised March 25, 1999
1625 N. French Dr., Hobbs, NM 87240		WELL API NO.
ALL SOUTH FIRST ARTESIA. INMI A / Z LU	SERVATION DIVISION	30-025-26911
District III 2	040 South Pacheco	5. Indicate Type of Lease
1000 Rio Brazos Rd., Aztec, NM 87410 Si	anta Fe, NM 87505	STATE FEE X
2040 South Pacheco, Santa Fe, NM 87505		6. State Oil & Gas Lease No.
SUNDRY NOTICES AND REPO (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL (DIFFERENT RESERVOIR. USE "APPLICATION FOR PERI PROPOSALS.)	OR TO DEEPEN OR PLUG BACK TO	
1. Type of Well:		Myers Langlie Mattix Unit
Oil Well Gas Well Other In	jection	
2. Name of Operator		8. Well No.
OXY USA WTP Limited Partnership 19246		
3. Address of Operator P.O. Box 50250 Midland, TX 79710-0250		9. Pool name or Wildcat
4. Well Location		Langlie Mattix 7Rvr On-GB
	and north Parad	1980 feet from the east line
	om the <u>north</u> line and	
Section 4 Towns		NMPM County Lea
10. Elevation	(Show whether DR, RKB, RT, GR 3273'	, etc.)
11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data		
NOTICE OF INTENTION TO:	1	JBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK PLUG AND AB		
TEMPORARILY ABANDON	NS COMMENCE DR	ILLING OPNS. PLUG AND ABANDONMENT
PULL OR ALTER CASING MULTIPLE COMPLETION	CASING TEST AI	
OTHER:	OTHER:	
12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.		
TD-3750' PBTD-3674' 0H-3425-3638'		
8-5/8" 24# csg @ 518' w/ 350sx, 12-1/4" hole, TOC-Circ 5-1/2" 15.5# csg @ 3750' w/ 2000sx, 7-7/8" hole, TOC-Circ 1. RIH & set CIBP @ 3375', dump 5sx cmt to 3340' 2. M&P 25sx cmt @ 2934-2834' 3. M&P 25sx cmt @ 1100-1000' 4. M&P 25sx cmt @ 568-468'-WOC-TAG 5. M&P 10sx cmt surface plug 10# MLF between plugs TO BE APPROVED.		
5-1/2" 15.5# csg @ 3750' w/ 2000sx, 7-7/8" hole, T0C-Circ 1. RIH & set CIBP @ 3375', dump 5sx cmt to 3340' 2. M&P 25sx cmt @ 2934-2834' 3. M&P 25sx cmt @ 1100-1000' THE COMMISSION MUST BE NOTIFIED 24		
4. M&P 25sx cmt @ 568-468'-WOC-TAG	HOURS PRIOR TO THE BEG	SINNING OF 6
5. M&P 10sx cmt surface plug	PLUGGING OPERATIONS FO	OR THE C-103
10# MLF between plugs	TO BE APPROVED.	
		35551
I hereby certify that the information above is true and complete to the best of my knowledge and belief.		
SIGNATURE Surface	TITLE Sr. Regulator	Ty Analyst DATE 4(2203
Type or print name David Stewart Telephone No. 915-685-5717		
(This space for State use)	OC FIELD REPRESENTATIVE	II/STAFF MANAGER ADD 0 4 2000
APPROVED BY Law W. Wink Conditions of approval, if any:	TITLE	DATE APR 24 2003

OXY USA WTP LP Myers Langlie Mattix Unit #148 Sec 4 T24S R37E Lea Cty, NM API No. 30-025-26911


10sx Surface

25sx @ 568-468'

25sx @ 1100-1000'

25sx @ 2934-2834'

CIBP @ 3375', dump 5sx to 3340'

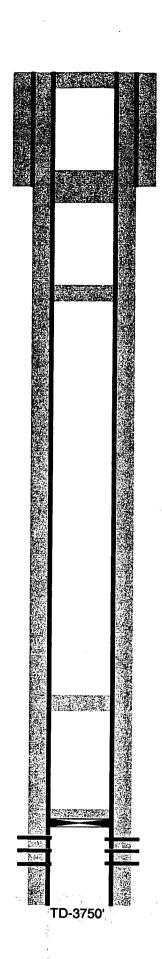

12-1/4" hole @ 518' 8-5/8" csg @ 518' w/ 350sx-WOC-Circ

7-7/8" hole @ 3750' 5-1/2" csg @ 3750' w/ 2000sx-TOC-Circ

Perfs @ 3425'-3638'