

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

C 55

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS** **OCD Hobbs**
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.5. Lease Serial No.
NMLC061863A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
TRIONYX 6 FEDERAL 8H9. API Well No.
30-025-4004810. Field and Pool, or Exploratory
WILDCAT11. County or Parish, and State
LEA COUNTY, NM**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

DEVON ENERGY PRODUCTION CO., L.P.

Contact: ERIN WORKMAN

E-Mail: ERIN.WORKMAN@DVN.COM

3a. Address

333 W. SHERIDAN AVENUE
OKC, OK 73102

3b. Phone No. (include area code)

Ph: 405-552-7970

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 6 T25S R32E 200FSL 635FEL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

TYPE OF ACTION

☒ Notice of Intent☐ Subsequent Report☐ Final Abandonment Notice☐ Acidize☐ Alter Casing☐ Casing Repair☐ Change Plans☐ Convert to Injection☐ Deepen☐ Fracture Treat☐ New Construction☐ Plug and Abandon☐ Plug Back☐ Production (Start/Resume)☐ Reclamation☐ Recomplete☐ Temporarily Abandon☐ Water Disposal☐ Water Shut-Off☐ Well Integrity☒ Other
Change to Original APD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Devon Energy Production Company, L.P. respectfully requests to change the original APD according to the attached Directional Survey.

Attached is the Directional Survey.

14. Thereby certify that the foregoing is true and correct.

Electronic Submission #166166 verified by the BLM Well Information System
For DEVON ENERGY PRODUCTION CO., LP, sent to the Hobbs
Committed to AFMSS for processing by KURT SIMMONS on 01/07/2013 ()

Name (Printed/Typed) ERIN WORKMAN

Title REGULATORY COMPLIANCE ASSOC.

Signature (Electronic Submission)

Date 12/17/2012

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office



Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.



**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

devon

Trionyx 6 Fed #8H
Lea County, New Mexico



KB ELEV: 3471.00
GL ELEV: 3447.00

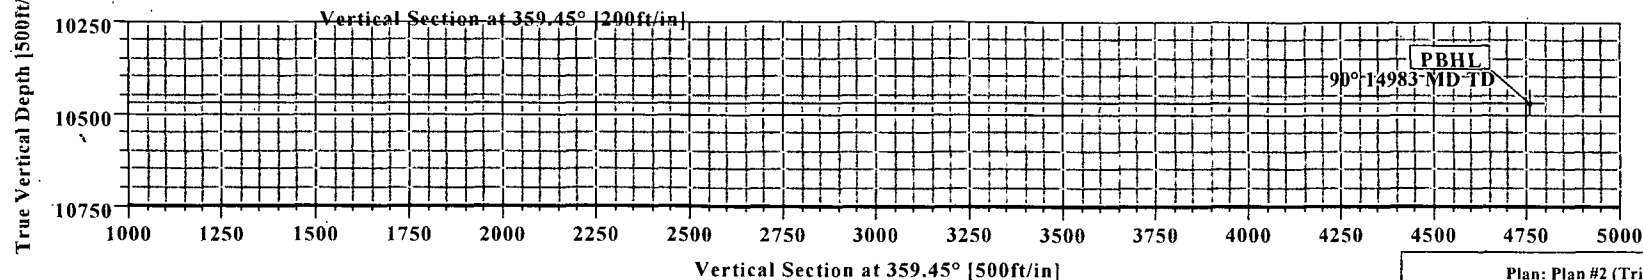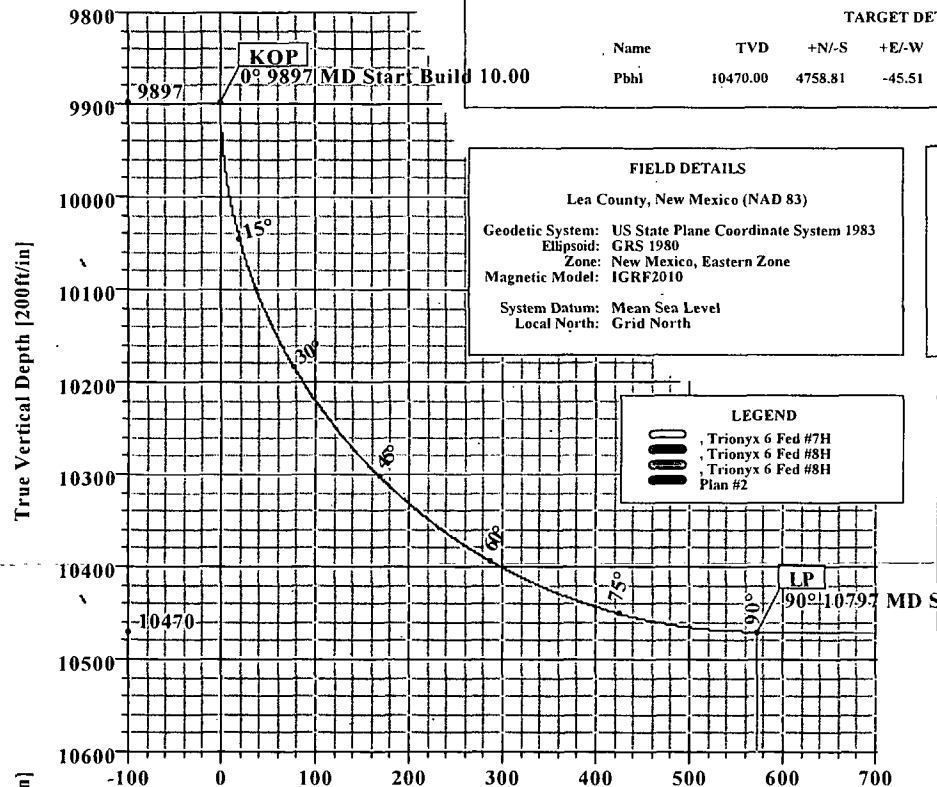

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	359.45	0.00	0.00	0.00	0.00	0.00	0.00	
2	9897.04	0.00	359.45	9897.04	0.00	0.00	0.00	0.00	0.00	
3	10797.04	90.00	359.45	10470.00	572.93	-5.48	10.00	359.45	572.96	
4	14983.11	90.00	359.45	10470.00	4758.81	-45.51	0.00	0.00	4759.03	Pbhl

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
Trionyx 6 Fed #8H	0.00	0.00	419774.91	734898.33	32°09'08.970N	103°42'28.412W	N/A

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
Pbhl	10470.00	4758.81	-45.51	424533.72	734852.82	Point

FIELD DETAILS

Lea County, New Mexico (NAD 83)

Geodetic System: US State Plane Coordinate System 1983
Ellipsoid: GRS 1980
Zone: New Mexico, Eastern Zone
Magnetic Model: IGRF2010
System Datum: Mean Sea Level
Local North: Grid North

SITE DETAILS

Trionyx 6 Fed #8H

Site Centre Northing: 419774.91
Easting: 734898.33

Ground Level: 3447.00
Positional Uncertainty: 0.00
Convergence: 0.33

LEGEND

- Trionyx 6 Fed #7H
- Trionyx 6 Fed #8H
- Trionyx 6 Fed #8H
- Plan #2



Azimuths to Grid North
True North: -0.33°
Magnetic North: 7.23°


Magnetic Field
Strength: 48517nT
Dip Angle: 60.08°
Date: 2/15/2012
Model: IGRF2010

Total Correction to Grid North: 7.23°



Weatherford

West(-)/East(+) [1000ft/in]

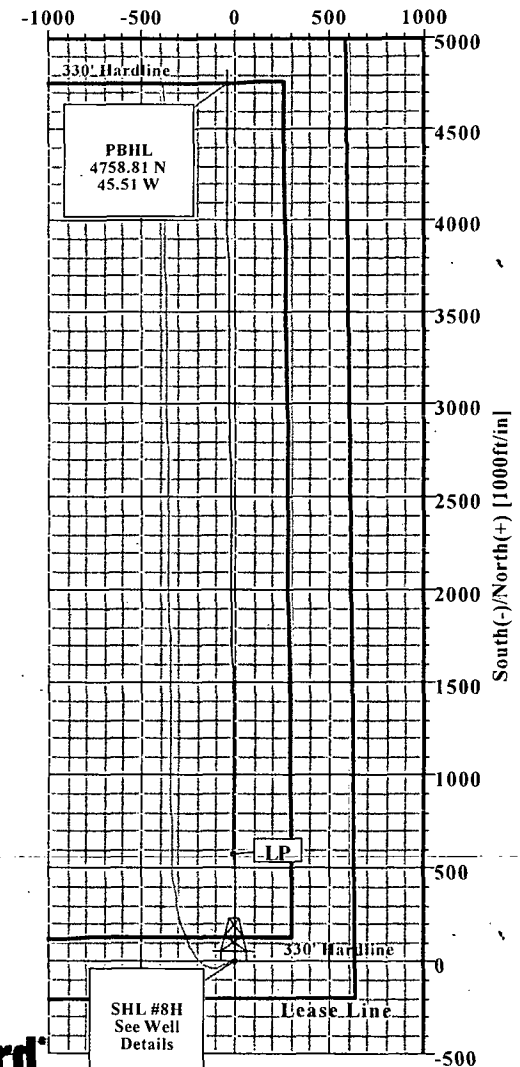

Plan: Plan #2 (Trionyx 6 Fed #8H/Lateral)

Created By: Russell W. Joyner

Date: 12/13/2012

Weatherford
WFT Plan Report - X & Y's

Company: Devon Energy
Time: 13:39:55 Page: 1
Field: Lea County, New Mexico (NAD 83)
Reference: Well: Trionyx 6 Fed #8H, Grid North
Site: Trionyx 6 Fed #8H
Reference: SITE 3472.0
Well: Trionyx 6 Fed #8H
Reference: Well (0.00N,0.00E,359.45Azi)
Wellpath: Lateral
Method: Minimum Curvature Db: Sybase

Date: 12/13/2012

Co-ordinate (NE)

Vertical (TVD)

Section (VS)

Survey Calculation

Plan: Plan #2
10/19/2010

Date Composed:

Version:

1
Principal: Yes
From Surface

Tied-to:

Field: Lea County, New Mexico (NAD 83)

Map System: US State Plane Coordinate System 1983
New Mexico, Eastern Zone
Geo Datum: GRS 1980
Well Centre
Sys Datum: Mean Sea Level
IGRF2010

Map Zone:

Coordinate System:

Geomagnetic Model:

Site: Trionyx 6 Fed #8H

Site Position:
32 9 8.970 N

Northing: 419774.91 ft Latitude:

From: Map
103 42 28.412 W

Easting: 734898.33 ft Longitude:

Position Uncertainty: 0.00 ft
Grid

North Reference:

Ground Level: 3447.00 ft
0.33 deg

Grid Convergence:

Well: Trionyx 6 Fed #8H

Slot Name:

Well Position: +N/-S 0.00 ft Northing: 419774.91 ft
32 9 8.970 N

Latitude:

+E/-W 0.00 ft Easting : 734898.33 ft Longitude:

103 42 28.412 W

Position Uncertainty: 0.00 ft

Wellpath: Lateral
Surface

Drilled From:

Tie-on Depth:

0.00 ft

Current Datum: SITE

Height 3472.00 ft

Above System

Datum: Mean Sea Level

Magnetic Data: 2/15/2012

Declination:

7.56 deg

Field Strength: 48517 nT

Mag Dip Angle:

60.08 deg

Vertical Section:Depth From (TVD)

+N/-S

+E/-W

Direction

ft

ft

ft

deg

0.00

0.00

0.00

359.45

Plan Section Information

MD	Incl	Azim	TVD	+N/-S	+E/-W	DLS	Build
Turn	TFO	Target					
ft	deg	deg	ft	ft	ft		
deg/100ft	deg/100ft	deg/100ft	deg				

0.00	0.00	359.45	0.00	0.00	0.00	0.00	0.00
------	------	--------	------	------	------	------	------

0.00	0.00						
------	------	--	--	--	--	--	--

9897.04	0.00	359.45	9897.04	0.00	0.00	0.00	0.00
---------	------	--------	---------	------	------	------	------

0.00	0.00						
------	------	--	--	--	--	--	--

10797.04	90.00	359.45	10470.00	572.93	-5.48	10.00	10.00
----------	-------	--------	----------	--------	-------	-------	-------

0.00	359.45						
------	--------	--	--	--	--	--	--

14983.11	90.00	359.45	10470.00	4758.81	-45.51	0.00	0.00
----------	-------	--------	----------	---------	--------	------	------

0.00	0.00	Pbhl					
------	------	------	--	--	--	--	--

Survey

MD	Incl	Azim	TVD	N/S	E/W	VS	DLS
MapN	MapE		Comment				
ft	deg	deg	ft	ft	ft	ft	deg/100ft
ft	ft						

9800.00	0.00	359.45	9800.00	0.00	0.00	0.00	0.00
---------	------	--------	---------	------	------	------	------

419774.91	734898.33						
-----------	-----------	--	--	--	--	--	--

9897.04	0.00	359.45	9897.04	0.00	0.00	0.00	0.00
---------	------	--------	---------	------	------	------	------

419774.91	734898.33	KOP					
-----------	-----------	-----	--	--	--	--	--

9900.00	0.30	359.45	9900.00	0.01	0.00	0.01	10.00
---------	------	--------	---------	------	------	------	-------

419774.92	734898.33						
-----------	-----------	--	--	--	--	--	--

9950.00	5.30	359.45	9949.92	2.45	-0.02	2.45	10.00
---------	------	--------	---------	------	-------	------	-------

419777.36	734898.31						
-----------	-----------	--	--	--	--	--	--

10000.00	10.30	359.45	9999.45	9.23	-0.09	9.23	10.00
----------	-------	--------	---------	------	-------	------	-------

419784.14	734898.24						
-----------	-----------	--	--	--	--	--	--

10050.00	15.30	359.45	10048.19	20.30	-0.19	20.30	10.00
----------	-------	--------	----------	-------	-------	-------	-------

419795.21	734898.14						
-----------	-----------	--	--	--	--	--	--

10100.00	20.30	359.45	10095.78	35.57	-0.34	35.57	10.00
----------	-------	--------	----------	-------	-------	-------	-------

419810.48	734897.99						
-----------	-----------	--	--	--	--	--	--

10150.00	25.30	359.45	10141.86	54.94	-0.53	54.94	10.00
419829.85	734897.80						
10200.00	30.30	359.45	10186.08	78.24	-0.75	78.25	10.00
419853.15	734897.58						
10250.00	35.30	359.45	10228.10	105.32	-1.01	105.32	10.00
419880.23	734897.32						
10300.00	40.30	359.45	10267.59	135.95	-1.30	135.95	10.00
419910.86	734897.03						
10350.00	45.30	359.45	10304.27	169.90	-1.62	169.91	10.00
419944.81	734896.71						
10400.00	50.30	359.45	10337.85	206.93	-1.98	206.94	10.00
419981.84	734896.35						
10450.00	55.30	359.45	10368.07	246.74	-2.36	246.75	10.00
420021.65	734895.97						
10500.00	60.30	359.45	10394.71	289.03	-2.76	289.04	10.00
420063.94	734895.57						
10550.00	65.30	359.45	10417.56	333.48	-3.19	333.50	10.00
420108.39	734895.14						
10600.00	70.30	359.45	10436.45	379.76	-3.63	379.78	10.00
420154.67	734894.70						
10650.00	75.30	359.45	10451.24	427.50	-4.09	427.52	10.00
420202.41	734894.24						
10700.00	80.30	359.45	10461.80	476.36	-4.56	476.38	10.00
420251.27	734893.77						
10750.00	85.30	359.45	10468.07	525.94	-5.03	525.97	10.00
420300.85	734893.30						
10797.04	90.00	359.45	10470.00	572.93	-5.48	572.96	10.00
420347.84	734892.85 LP						
10800.00	90.00	359.45	10470.00	575.89	-5.51	575.92	0.00
420350.80	734892.82						
10900.00	90.00	359.45	10470.00	675.88	-6.46	675.92	0.00
420450.79	734891.87						
11000.00	90.00	359.45	10470.00	775.88	-7.42	775.92	0.00
420550.79	734890.91						
11100.00	90.00	359.45	10470.00	875.88	-8.38	875.92	0.00
420650.79	734889.95						
11200.00	90.00	359.45	10470.00	975.87	-9.33	975.92	0.00
420750.78	734889.00						
11300.00	90.00	359.45	10470.00	1075.87	-10.29	1075.92	0.00
420850.78	734888.04						
11400.00	90.00	359.45	10470.00	1175.86	-11.25	1175.92	0.00
420950.77	734887.08						
11500.00	90.00	359.45	10470.00	1275.86	-12.20	1275.92	0.00
421050.77	734886.13						
11600.00	90.00	359.45	10470.00	1375.85	-13.16	1375.92	0.00
421150.76	734885.17						
11700.00	90.00	359.45	10470.00	1475.85	-14.11	1475.92	0.00
421250.76	734884.22						
11800.00	90.00	359.45	10470.00	1575.84	-15.07	1575.92	0.00
421350.75	734883.26						
11900.00	90.00	359.45	10470.00	1675.84	-16.03	1675.92	0.00
421450.75	734882.30						

12000.00	90.00	359.45	10470.00	1775.83	-16.98	1775.92	0.00
421550.74	734881.35						
12100.00	90.00	359.45	10470.00	1875.83	-17.94	1875.92	0.00
421650.74	734880.39						
12200.00	90.00	359.45	10470.00	1975.83	-18.90	1975.92	0.00
421750.74	734879.43						
12300.00	90.00	359.45	10470.00	2075.82	-19.85	2075.92	0.00
421850.73	734878.48						
12400.00	90.00	359.45	10470.00	2175.82	-20.81	2175.92	0.00
421950.73	734877.52						
12500.00	90.00	359.45	10470.00	2275.81	-21.76	2275.92	0.00
422050.72	734876.57						
12600.00	90.00	359.45	10470.00	2375.81	-22.72	2375.92	0.00
422150.72	734875.61						
12700.00	90.00	359.45	10470.00	2475.80	-23.68	2475.92	0.00
422250.71	734874.65						
12800.00	90.00	359.45	10470.00	2575.80	-24.63	2575.92	0.00
422350.71	734873.70						
12900.00	90.00	359.45	10470.00	2675.79	-25.59	2675.92	0.00
422450.70	734872.74						
13000.00	90.00	359.45	10470.00	2775.79	-26.55	2775.92	0.00
422550.70	734871.78						
13100.00	90.00	359.45	10470.00	2875.78	-27.50	2875.92	0.00
422650.69	734870.83						
13200.00	90.00	359.45	10470.00	2975.78	-28.46	2975.92	0.00
422750.69	734869.87						
13300.00	90.00	359.45	10470.00	3075.77	-29.41	3075.92	0.00
422850.68	734868.92						
13400.00	90.00	359.45	10470.00	3175.77	-30.37	3175.92	0.00
422950.68	734867.96						
13500.00	90.00	359.45	10470.00	3275.77	-31.33	3275.92	0.00
423050.68	734867.00						
13600.00	90.00	359.45	10470.00	3375.76	-32.28	3375.92	0.00
423150.67	734866.05						
13700.00	90.00	359.45	10470.00	3475.76	-33.24	3475.92	0.00
423250.67	734865.09						
13800.00	90.00	359.45	10470.00	3575.75	-34.20	3575.92	0.00
423350.66	734864.13						
13900.00	90.00	359.45	10470.00	3675.75	-35.15	3675.92	0.00
423450.66	734863.18						
14000.00	90.00	359.45	10470.00	3775.74	-36.11	3775.92	0.00
423550.65	734862.22						
14100.00	90.00	359.45	10470.00	3875.74	-37.06	3875.92	0.00
423650.65	734861.27						
14200.00	90.00	359.45	10470.00	3975.73	-38.02	3975.92	0.00
423750.64	734860.31						
14300.00	90.00	359.45	10470.00	4075.73	-38.98	4075.92	0.00
423850.64	734859.35						
14400.00	90.00	359.45	10470.00	4175.72	-39.93	4175.92	0.00
423950.63	734858.40						
14500.00	90.00	359.45	10470.00	4275.72	-40.89	4275.92	0.00

424050.63	734857.44						
14600.00	90.00 359.45	10470.00	4375.72	-41.85	4375.92	0.00	
424150.63	734856.48						
14700.00	90.00 359.45	10470.00	4475.71	-42.80	4475.92	0.00	
424250.62	734855.53						
14800.00	90.00 359.45	10470.00	4575.71	-43.76	4575.92	0.00	
424350.62	734854.57						
14900.00	90.00 359.45	10470.00	4675.70	-44.72	4675.92	0.00	
424450.61	734853.61						
14983.11	90.00 359.45	10470.00	4758.81	-45.51	4759.03	0.00	
424533.72	734852.82 Pbhl						

Weatherford
WFT Plan Report - X & Y's

Company: Devon Energy	Date: 12/13/2012
Time: 13:39:55	Page: 3
Field: Lea County, New Mexico (NAD 83)	Co-ordinate (NE)
Reference: Well: Trionyx 6 Fed #8H, Grid North	Vertical (TVD)
Site: Trionyx 6 Fed #8H	Section (VS)
Reference: SITE 3472.0	Survey Calculation
Well: Trionyx 6 Fed #8H	
Reference: Well (0.00N,0.00E,359.45Azi)	
Wellpath: Lateral	
Method: Minimum Curvature	Db: Sybase

Targets

							Map
Map	Latitude		Longitude				
Name	Description		TVD	+N/-S	+E/-W	Northing	
Easting	Deg	Min	Sec	Deg	Min	Sec	
ft	Dip.	Dir.	ft	ft	ft	ft	
Pbhl				10470.00	4758.81	-45.51	424533.72
734852.82	32	9	56.064 N	103	42	28.620 W	

Casing Points

MD	TVD	Diameter	Hole Size	Name
----	-----	----------	-----------	------

Annotation

MD	TVD	
ft	ft	
9897.04	9897.04	KOP
10797.04	10470.00	LP
14983.11	10470.00	PBHL
Formations		

MD	TVD	Formations	Lithology
Dip Angle	Dip Direction		

