

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBS OFFICE
FEB 05 2013

WELL API NO. 30-025-03839
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-1553
7. Lease Name or Unit Agreement Name Lovington San Andres Unit
8. Well Number: 43
9. OGRID Number: 241333
10. Pool name or Wildcat Lovington Graybrg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection ☐

2. Name of Operator
Chevron Midcontinent, L.P.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location
Unit Letter E : 1980 feet from the NORTH line and 660 feet from the WEST line
Section I Township 17-S Range 36-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3832' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-5040' PB-5040' OH-4546'-5040'
13" 50# csg @ 220' w/220 sks, 17-1/2" hole, TOC: Surface
8-5/8" 32# csg @ 2038' w/600 sks, 11" hole, TOC: 195' Calculated
5-1/2" 14# csg @ 4546' w/350 sks, 7-7/8" hole, TOC: 2785' Calculated

- MIRUWSU. NDWH. NUBOP.
- Remove Baker AD-1 Packer @ 4486'
- Set CIBP @ 4500' w/25 sx of C cement.
- Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
- Perf & Sqz 40 sks of C cement @ 3190 - 2990', CTOC. WOC & TAG, (Bottom of Salt)
- Perf & Sqz 50 sks of C cement @ ~~2200~~ - 1900' CTOC. WOC & TAG, (Top of Salt, & Shoe) **2088'**
- Perf & Circulate 100 sks of C cement @ 325' to Surface.
- Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

Representative

DATE

10/09/12

Type or print name Matthew Brewer

E-mail address: mbrewer01@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY:

TITLE

Compliance Officer

DATE

02-08-2013

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office. Must be Notified 24 hours prior to the beginning of Plugging Operations begin.

Wellbore Diagram

Lovington San Andres Unit # 43

Created: 01/29/13 By: Bob Hall
 Updated: By:
 Updated: By:
 Updated: By:
 Lease: Lovington San Andres Unit
 Field: Vacuum (Grayburg-San Andres)
 Surf. Loc.: 1980' FNL & 660' FWL
 GPS: 32.86574 -103.31396
 County: Lea St.: NM
 Status:

Well #: 43 St. Lse: B1553
 API: 30-025-03839
 CHEVNO: FA4986
 Unit Ltr.: E Section: 1
 TSHP/Rng: 17S / 36E
 Spud Date: 5/7/1941
 Comp Date: 6/19/1941
 First Inj. 4/1/2005
 Last Inj. 12/31/2012

Surface Casing

Size: 13"
 Wt., Grd.: 50#
 Depth: 220'
 Sxs Cmt: 200 sx
 Circulate: YES
 TOC: Surface
 Hole Size: 17-1/2"


KB: 3843'
 DF: 3842'
 GL: 3832'

Intermediate Casing

Size: 8-5/8"
 Wt., Grd.: 32#
 Depth: 2,038'
 Sxs Cmt: 600 sx
 Circulate: NO
 TOC: 195' Calculated
 Hole Size: 11"

Production Casing

Size: 5-1/2"
 Wt., Grd.: 14#
 Depth: 4546'
 Sxs Cmt: 350 sx
 Circulate: NO
 TOC: 2,785' Calculated
 Hole Size: 7-7/8"

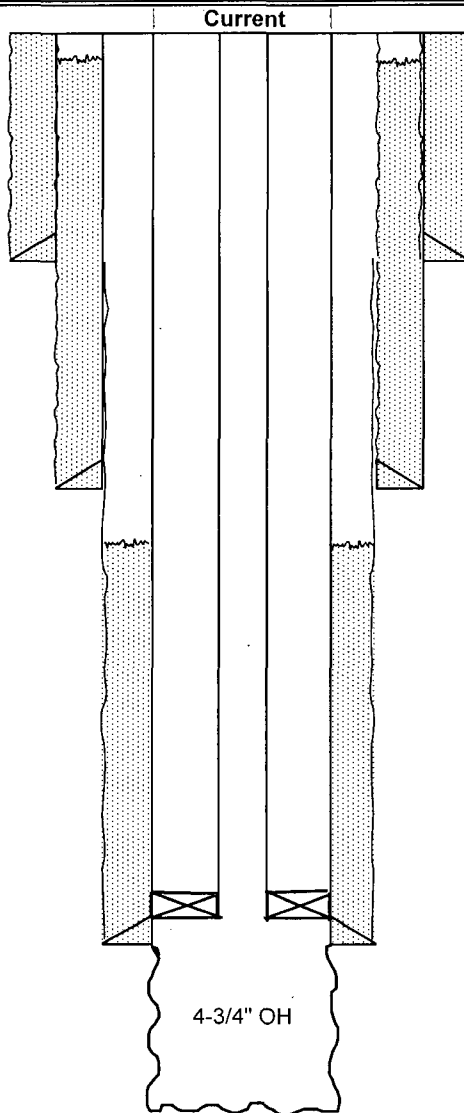

PBTD: 5,040
 TD: 5,040

Tubing Detail (Sept 1992)

Tubing: 136 jts 2-3/8" IPC
 5-1/2" Baker AD-1 pkr @ 4,486'

OH: 4546' -5040'

Source	NAME	TOP	BOTTOM
Anhydrite	Samples	2000	
Salt		2100	3090
Brown Lime		4115	
SAN ANDRES		4590	

Wellbore Diagram

Lovington San Andres Unit # 43

Created: 01/29/13 By: Bob Hall
 Updated: By:
 Updated: By:
 Updated: By:
 Lease: Lovington San Andres Unit
 Field: Vacuum (Grayburg-San Andres)
 Surf. Loc.: 1980' FNL & 660' FWL
 GPS: 32.86574 -103.31396
 County: Lea St.: NM
 Status:

Well #: 43 St. Lse: B1553
 API: 30-025-03839
 CHEVNO: FA4986
 Unit Ltr.: E Section: 1
 TSHP/Rng: 17S / 36E
 Spud Date: 5/7/1941
 Comp Date: 6/19/1941
 First Inj. 4/1/2005
 Last Inj. 12/31/2012

