

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-31553
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington San Andres Unit
8. Well Number: 87
9. OGRID Number: 241333
10. Pool name or Wildcat Lovington Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other Water Injection ☐	
2. Name of Operator Chevron Midcontinent, L.P.	
3. Address of Operator 15 Smith Road Midland, TX 79705	
4. Well Location Unit Letter <u>C</u> : <u>2515</u> feet from the <u>NORTH</u> line and <u>1462</u> feet from the <u>WEST</u> line Section <u>1</u> Township <u>17-S</u> Range <u>36-E</u> NMPM County <u>Lea</u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3846' GL	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			

OTHER: ☐ OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD- 5150' Perfs 4638' - 5072' CIBP @ 4498'
8-5/8" 24# csg @ 1330' w/550 sks, 12-1/4" hole, TOC: Surface
5-1/2" 15.5# csg @ 5150' w/1150 sks, 7-7/8" hole, TOC: Surface

1. MIRUWSU. NDWH. NUBOP.
2. Drill out existing CIBP @ 4498'
3. Set CIBP @ 4550' w/25 sks of C cement.
4. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
5. Set Plug w/25 sks of C cement @ 3100 - 2900', CTOC. WOC & TAG (Bottom of Salt)
6. Set Plug w/ 25 sks of C cement @ 2100' - 1900', CTOC. WOC & TAG (Top of Salt)
7. Set Plug w/25 sks of cement @ 1430' - 1230', CTOC, (shoe)
8. Perf & Circulate 40 sks of C cement @ 100' to Surface.
9. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 04/11/2013

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer DATE 04-12-2013

Conditions of Approval (if any):

APR 15 2013

**WELLBORE DIAGRAM
LSAU 87**

Created: 02/13/13 By: RRW
 Updated: _____ By: _____
 Lease: Lovington San Andres Unit
 Field: Lovington Grayburg San Andres
 Surf. Loc.: 2515' FNL 1462' FWL
 Bot. Loc.: _____
 County: Lea St.: NM
 Status: TA'd Producing Well

Well #: 87 St. Lse: _____
 API: 30-025-31553
 Unit Ltr.: C Section: 1
 TSHP/Rng: 17S 36E
 Pool Code: _____ OGRID: 241333
 Directions: Lovington, NM
 Chevno: OV1658

Surface Casing


Size: 8 5/8"
 Wt., Grd.: 24#
 Depth: 1330'
 Sxs Cmt: 550
 Circulate: yes
 TOC: surface
 Hole Size: 12-1/4"

KB: _____
 DF: _____
 GL: 3,846
 Ini. Spud: 04/25/92
 Ini. Comp.: 06/02/92

Top Salt - 2000'
Bottom Salt - 3000'

Production Casing

Size: 5 1/2"
 Wt., Grd.: 15.5#
 Depth: 5150'
 Sxs Cmt: 1150
 Circulate: Yes
 TOC: Surface
 Hole Size: 7 7/8"

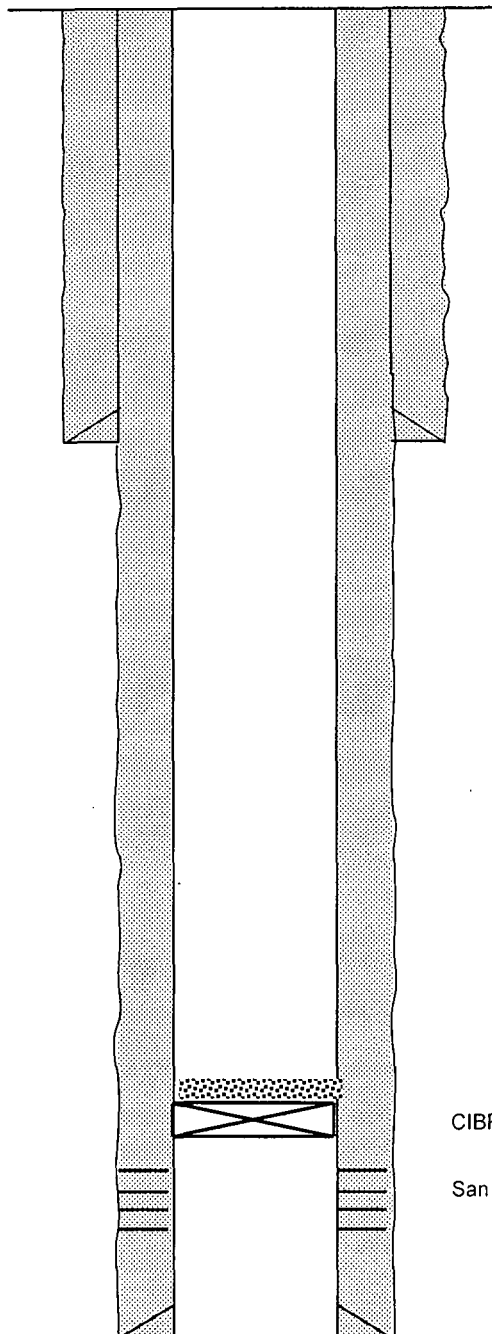

CIBP @ 4498' capped with 30' cmt

San Andres Perfs: 4638'-5072'

TD: 5,150'

Proposed

WELLBORE DIAGRAM

LSAU 87

Created: 02/13/13 By: RRW
 Updated: By:
 Lease: Lovington San Andres Unit
 Field: Lovington Grayburg San Andres
 Surf. Loc.: 2515' FNL 1462' FWL
 Bot. Loc.:
 County: Lea St.: NM
 Status: TA'd Producing Well

Well #: 87 St. Lse:
 API: 30-025-31553
 Unit Ltr.: C Section: 1
 TSHP/Rng: 17S 36E
 Pool Code: OGRID: 241333
 Directions: Lovington, NM
 Chevno: OV1658

Surface Casing

Size: 8 5/8"
 Wt., Grd.: 24#
 Depth: 1330'
 Sxs Cmt: 550
 Circulate: yes
 TOC: surface
 Hole Size: 12-1/4"

KB:
 DF:
 GL: 3,846

Perf 4 Ini. Spud: 04/25/92
 Ini. Comp.: 06/02/92

Circ 1 w/ 1 cls
 C 100' TO SURF

1 @ 140' - 1230' w/ 25
 s of Class Cement or (SAND)

2' - 1' w/ 2 sks of
 mt or TAB (TOP OF SALT)

1 @ 3100' - 2900' w/ 25 sks
 or in TAB Bottom of Salt)

ILL OUT - ist'n CIBP
 8' + New CIBP @ 4550'
 w/ 25 sks of Class Cement

Production Casing

Size: 5 1/2"
 Wt., Grd.: 15.5#
 Depth: 5150'
 Sxs Cmt: 1150
 Circulate: Yes
 TOC: Surface
 Hole Size: 7 7/8"

CIBP @ 4498' capped with 30' cmt

San Andres Perfs: 4638'-5072'

TD: 5,150'