

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-38586
5. Indicate Type of Lease STATE FEE X
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name TORREYS 7 FEE
8. Well Number 001
9. OGRID Number 162683
10. Pool name or Wildcat DENTON; WOLFCAMP

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well Gas Well X Other	HOBBS OCD
2. Name of Operator CIMAREX ENERGY CO. OF COLORADO	SEP 03 2014
3. Address of Operator 600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701	RECEIVED
4. Well Location Unit Letter M : 430 feet from the SOUTH line and 430 feet from the WEST line Section 07 Township 15S Range 38E NMPM LEA County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,775' - GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON X
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of, proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 9,050', PUMP 25 SXS. CMT. @ 9,050'-8,860'; CIRC. WELL W/ PXA MUD. SET CIBP 100' or LESS ABOVE WINDOW.
2) PERF. X ATTEMPT TO SQZ. 70 SXS. CMT. @ 8,334'-8,154' (T/ABO). WOC & TAG *@9063' or deeper.
3) PERF. X ATTEMPT TO SQZ. 60 SXS. CMT. @ 6,857'-6,697' (T/GLOR.); WOC X TAG CMT. PLUG.
4) CUT X PULL 5-1/2" CSG. @ +/-4,602'.
5) PUMP 85 SXS. CMT. @ 4,652'-4,392' (5-1/2" CSG.CUT, 8-5/8" CSG.SHOE, T/S.A.); WOC X TAG CMT. PLUG.
6) PUMP 50 SXS. CMT. @ 3,230'-3,100' (T/YATES); WOC X TAG CMT. PLUG.
7) PUMP 50 SXS. CMT. @ 2,252'-2,132' (T/ANHY.); WOC X TAG CMT. PLUG.
8) PUMP 40 SXS. CMT. @ 700'-600' (13-3/8" CSG.SHOE); WOC X TAG CMT. PLUG.
9) MIX X CIRC. TO SURF. 40 SXS. CMT. @ 100'-3'.
10) DIG OUT X CUT OFF WELEHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.
11) DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE:

AGENT

DATE: 08/29/14

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

TITLE

DATE

Conditions of Approval (if any):

SEP 04 2014



KB - 23' above GL

Cimarex Energy Co. of Colorado

Torrays 7 Fee 1

SHL - 430' FSL & 430' FWL

BHL - 2289' FSL & 424' FWL

Sec. 7, T-15-S, R-38-E, Lea Co., NM

M. Ketter **30-025-38586** 8/19/14

13-3/8" 48# H40 csg @ 650'

510 sxs cmt; Circl'd Cmt

8-5/8" 32# J55 csg @ 4,602'

1,015 sxs; Circl'd Cmt

270 jts 2-7/8" 6.5# J-55 tbgs
(L-80)

286 RODS

SN @ 9,047'

AS-1X pkr @ 9,078'

Window 9163'-

Wolcamp Perfs (9,850'-10,875')

KOP @ 9,182'

CIBP @ 9180'

5-1/2" 17# P110 csg @ 9,850'
800 sxs cmt, TOC @ 8,300' (EST)

TD @ 11,065' (MD) & 9,342' (TVD)





KB - 23' above GL

Cimarex Energy Co. of Colorado


Torrays 7 Fee 1

SHL - 430' FSL & 430' FWL

BHL - 2289' FSL & 424' FWL

Sec. 7, T-15-S, R-38-E, Lea Co., NM

M. Ketter 30-025-38586 8/19/14

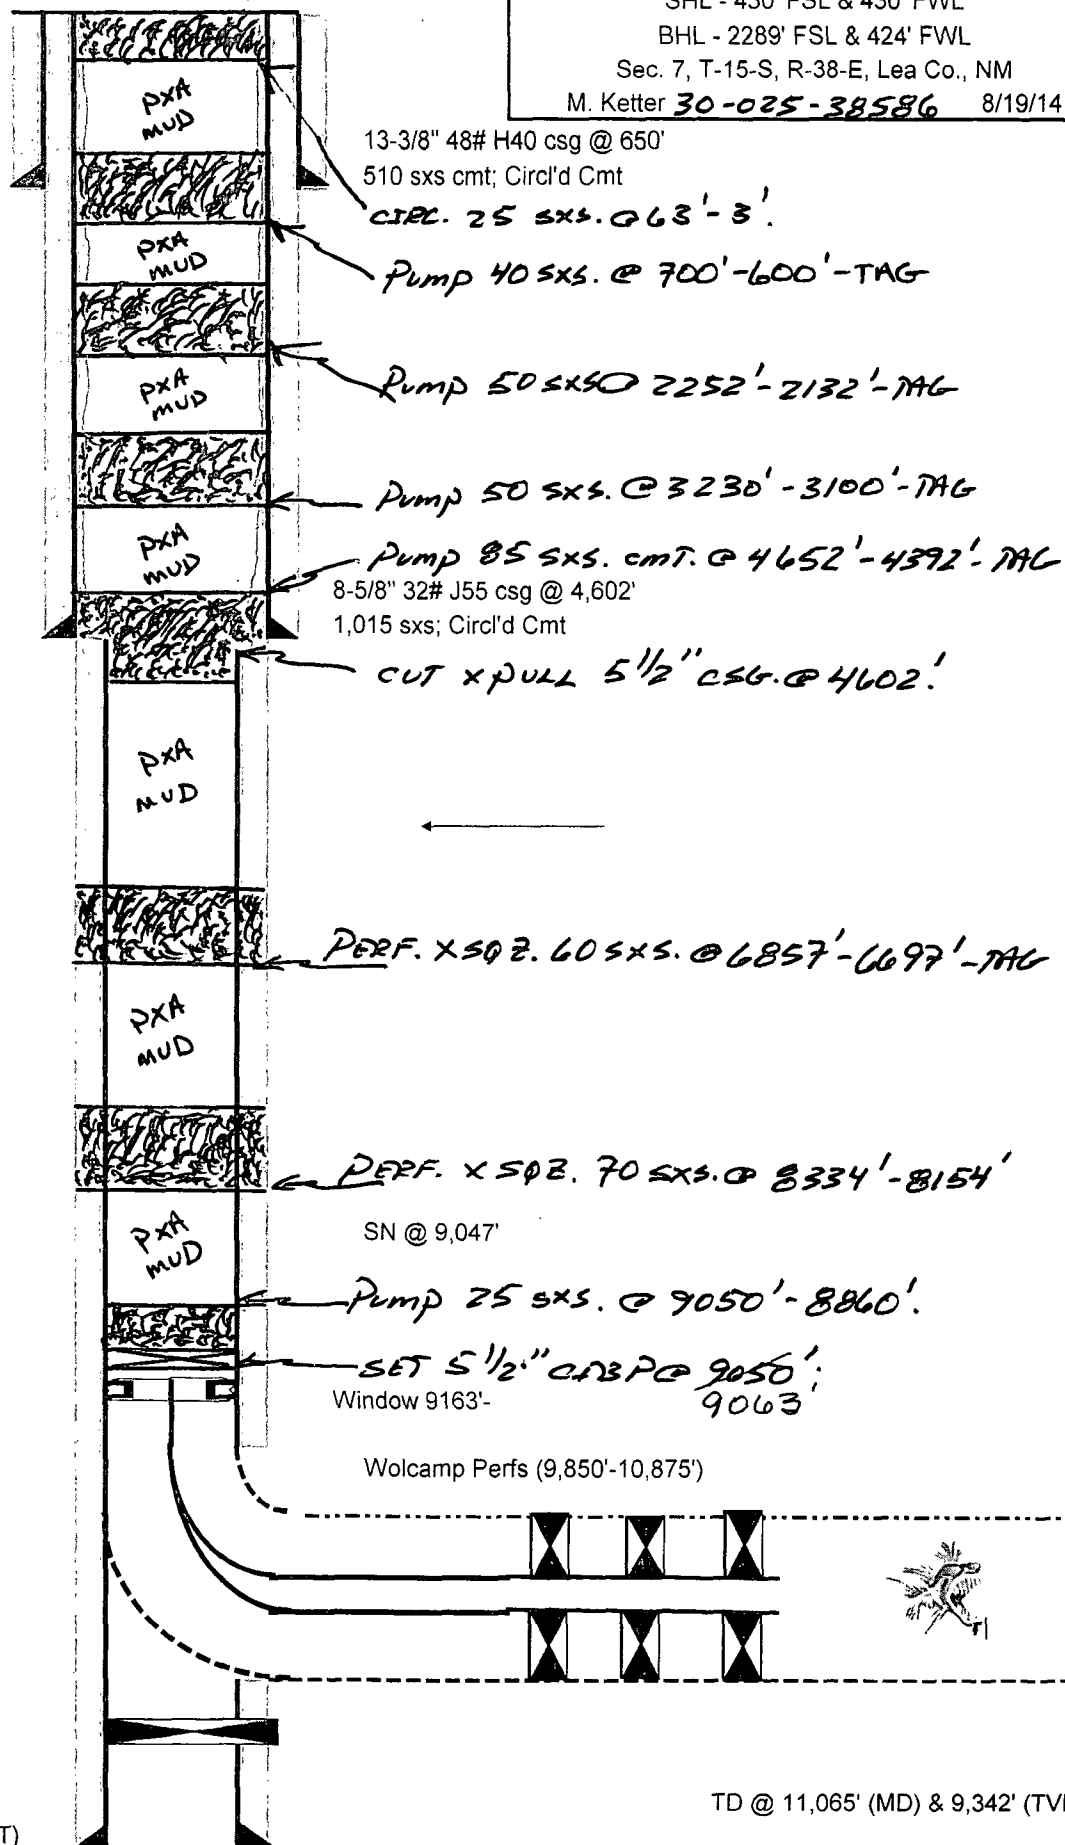

AS-1X pkr @ 9,078'

KOP @ 9,182'

CIBP @ 9180'

5-1/2" 17# P110 csg @ 9,850'
800 sxs cmt, TOC @ 8,300' (EST)

TD @ 11,065' (MD) & 9,342' (TVD)