Form 3160-5 (March 2012)

#### **UNITED STATES** DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

HOBBS OCD

FORM APPROVED

DEC 18 20


OMB No. 1004-0137 Expires: October 31, 2014

BUREAU OF LAND MANAGEMENT					5. Lease Serial No.  SMNM 9914L			
Do not use this f	OTICES AND REPO form for proposals t Use Form 3160-3 (A	o drill or to re	-enter an	aved.	6. If Indian, Allo	ottee or Tribe N	ame	
SUBMIT IN TRIPLICATE – Other instructions on page 2.					7. If Unit of CA/	Agreement, Na	ame and/or No.	
I. Type of Well  Oil Well  Gas W	7-11				8. Well Name an			
2. Name of Operator Seely Oil Company	Vell Other		· · · · · · · · · · · · · · · · · · ·	,	9. API Well No. 30-025-01391	eral #4	,	
		lo. p. 22 6					<u> </u>	
3a. Address 815 W. 10th Street Fort Worth, TX 76102		3b. Phone No. (inc. 817-332-1377	clude area code)		<ol><li>Field and Po Corbin, Queen</li></ol>	•	ory Area	
4. Location of Well (Footage, Sec., T.,	R.,M., or Survey Description	)			11. County or Pa	rish, State	· · · · · · · · · · · · · · · · · ·	
Unit K - Section 34 - Township 17S - Range 33E	; 1650 feet from the South line 16	50 feet from the West lin	e		Lea County, Ni	M	•	
12. CHEC	K THE APPROPRIATE BO	X(ES) TO INDICA	TE NATURE O	F NOTIC	E, REPORT OR	OTHER DATA	A	
TYPE OF SUBMISSION			TYPĘ	E-P	ERMITTIN	IG		
Notice of Intent	Acidize	Deepen	1		A NR		P&A R	
	Alter Casing	Fracture 7	Ггеат		TO P&A	BW.	COMP	
Subsequent Report	Casing Repair	New Con	:	CSI			CHG Loc	
	Change Plans	Plug and .		TA		PPDI	IS CHART	
Final Abandonment Notice	Convert to Injection	Plug Back	ζ			ווטטוו	O CHARI	
testing has been completed. Final determined that the site is ready for Seely Oil Company proposes.  1. 30 sx - 3848' - 3700' 2. Load csg w/ mud. 3. Perforate 4 squeeze holes @ 344. TIH w/ tbg & pkr to 2500'. 5. Pump 75 sx. Displace to \$900'.(6. Perforate 4 squeeze holes @ 467. TIH w/ tbg & pkr to 1000'. 8. Pump 75 sx. Displace to 1 4 (0.9. Perforate 4 squeeze holes @ 3510. Circulate cmt. 11. Install dry hole maker. 12. Clean location.	r final inspection.) es to plug and Tog.  90°. 2852′ Se TAG). 2605′	d abandon  PZ ent  PZ ent	70 740	cows:	Typhis T/Satt	B/salt	Doctog	
14. I hereby certify that the foregoing is t	rue and correct. Name (Printe	d/Typed)				·		
David L. Henderson		Ti	tle President					
Signature Jural 1	Condorse	<u>ہے</u> ا	ate 10/09/2014	ļ				
	THIS SPACE	FOR FEDERA	AL OR STAT	TE OFF	ICE USE			
Approved by  Conditions of approval, if any, are attached that the applicant holds legal or equitable to	d. Approval of this notice doe itle to those rights in the subje	s not warrant or certi ct lease which would	Title SA	1ET		Date	11-29-14	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false fictition or fraudulent statements or representations as to any matter within its jurisdiction.

entitle the applicant to conduct operations thereon.

## Cockburn Federal #4

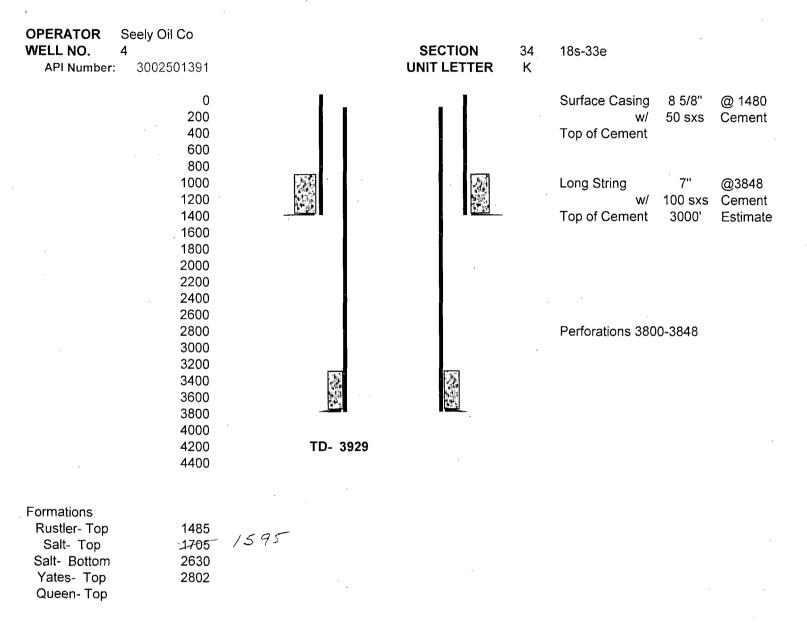

· · · · · · · · · · · · · · · · · · ·		7 1 1 2 1 2 1 6
l	All annulus	Operator Seely D: 1 Co Well Name No. Cockburn Fed 4 API 3002501391
Hole Size	4/1	
.Cmt, sxs 50 Toc ?	Pert 330	1650 NO 1650 E D Sec34 TWW 175 RNG 33E
Csg Sz 8 18 24 28 11	100 TOL 1400	7/Anhy 1440 T/SAIT 1595 15 1705
Hole Size		B/SALT 2655
		R-111-P
Cnd. Sxs 100 TOC		CANE/KARST
		FORMATION TOPS:
(4)		Yates 2802
	1 502, Cm4	/
	502. Cm 4 Fact. 1645	
	par,	
		<u></u>
	WOC Tay 2605	
	SQZ 75 Lyts Blant) Perf@285Z	)
	1/ Pert@2852	<b></b>
		DVT:
{ <i>//</i> {/ <i>/</i>	Wax Tay 3700	PERFORATIONS; 3929 gen.
	1 - Spot 30-5X _	3800 3848
Csg Sz_7	@ 3848	
PBTD 3209 gvl		
Pack.		

# BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

## Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2. <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. Dry Hole Marker: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

- 7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

J. Amos 3/6/11



# **United States Department of the Interior**

#### BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

#### **Reclamation Objectives and Procedures**

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Solomon Hughes Natural Resource Specialist 575-234-5951

Jeffery Robertson Natural Resource Specialist 575-234-2230

Duncan Whitlock Environmental Protection Specialist 575-234-5926

Linda Denniston Environmental Protection Specialist 575-234-5974

Douglas Hoag Civil Engineering Tech 575-234-5979 Cody Layton Supervisory Multi Resources 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612