

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-27096
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name USA QUAIL QUEEN UNIT
8. Well Number: 7
9. OGRID Number: 4323
10. Pool name or Wildcat QUAIL, QUEEN

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other Water Injection

2. Name of Operator
Chevron U.S.A. INC.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location
Unit Letter M : 660' feet from the SOUTH line and 660' feet from the WEST line
Section 11 Township 19-S Range 34-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3980' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	RE P&A NR	P&A R
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	CC INT TO P&A (P.N.)	COMP
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CA CSNG	CHG Loc
DOWNHOLE COMMINGLE ☐		TA	RBDMS CHART
OTHER: ☐		OTHER:	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD 5272', PBTD 5312' PERFS: 5062' - 5071', 5152' - 5157', CIBP: @ 5012'
8-5/8" 24# csg. @ 1882' w/750 sks 11" hole, circ to surface
4-1/2" 10.5 # csg. @ 5312' w/685 sks 7-7/8" hole, TOC, UNKNOWN


- MIRUWSU. NDWH. NUBOPE.
- Tag CIBP @ 5012' CAP w/255X5 CMT.
- Pressure Test casing to 500 psi and record/report findings
- Set Plug w/20 sks of Class C cement, @ 3407' - 3207', WOC & TAG, (Bottom Salt)
- Perf & Sqz w/ 45 sks, @ 2400' - 2200', WOC & TAG (Top of Salt)
- Perf & Sqz w/45 sks of C cement @ 1982' - 1782', WOC & TAG, (Shoe)
- Perf & Circulate w/80 sks of C cement 300'-Surface.
- Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.
- CLOSED LOOP SYSTEM USED.

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations


Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

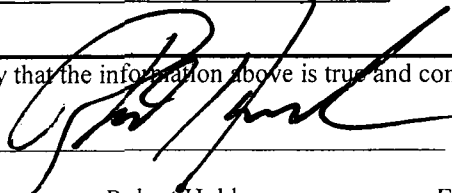SIGNATURE  TITLE Representative DATE 01/09/2014

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only
APPROVED BY:  TITLE Dist. Supervisor DATE 1/13/2015


Conditions of Approval (if any):

JAN 14 2015

CURRENT

Chevron U.S.A. Inc. Wellbore Diagram : QQU 7

Lease: OEU EUNICE FMT		Well No.: QUAIL QUEEN UNIT 7 T/A 7		Field: QUAIL	
Location: 660FSL660FWL		Sec.: N/A		Blk:	Survey: N/A
County: Lea	St.: New Mexico	Refno: AI4410		API: 3002527096	Cost Center: UCAL50500
Section: E034		Township: 11		Range: S019	
Current Status: ACTIVE				Dead Man Anchors Test Date: NONE	
Directions:					

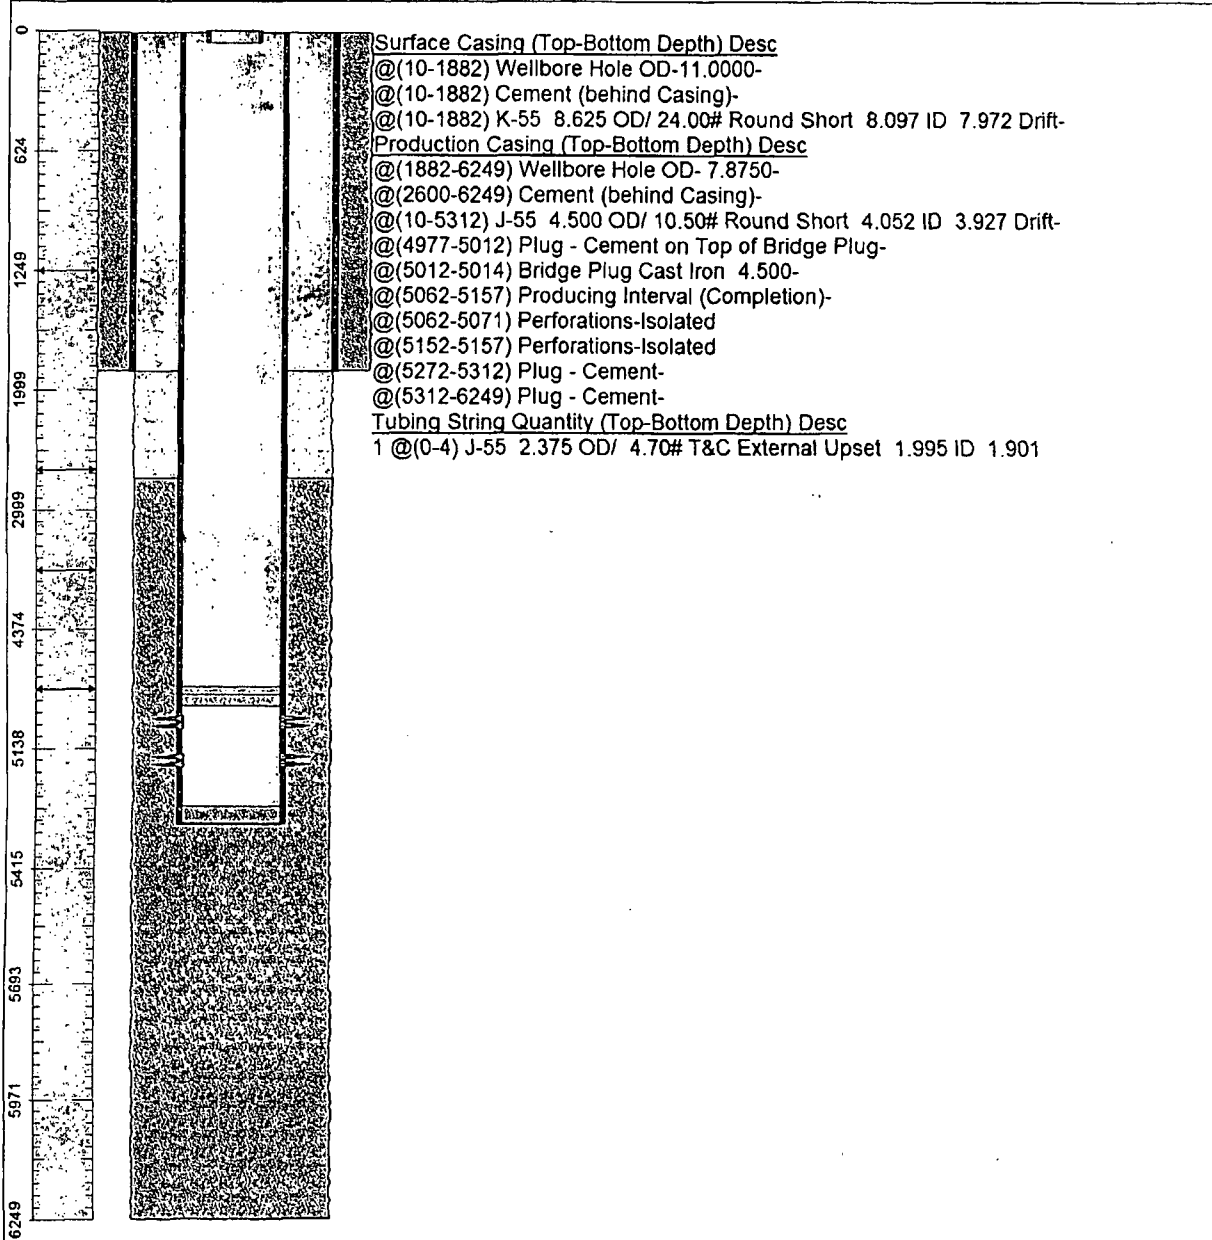


Ground Elevation (MSL): 3980.00	Spud Date: 02/17/1981	Compl. Date: 01/01/1800
Well Depth Datum: Kelly Bushing	Elevation (MSL): 3990.00	Correction Factor: 10.00
Last Updated by: fitecl		Date: 04/29/2014

Proposal

Chevron U.S.A. Inc. Wellbore Diagram : QQU 7

Lease: OEU EUNICE FMT	Well No.: QUAIL QUEEN UNIT 7 T/A 7	Field: QUAIL	
Location: 660FSL660FWL	Sec.: N/A	Blk:	Survey: N/A
County: Lea	St.: New Mexico	Refno: AI4410	API: 3002527096
Section: E034	Township: 11	Range: 5019	
Current Status: ACTIVE		Dead Man Anchors Test Date: NONE	
Directions:			

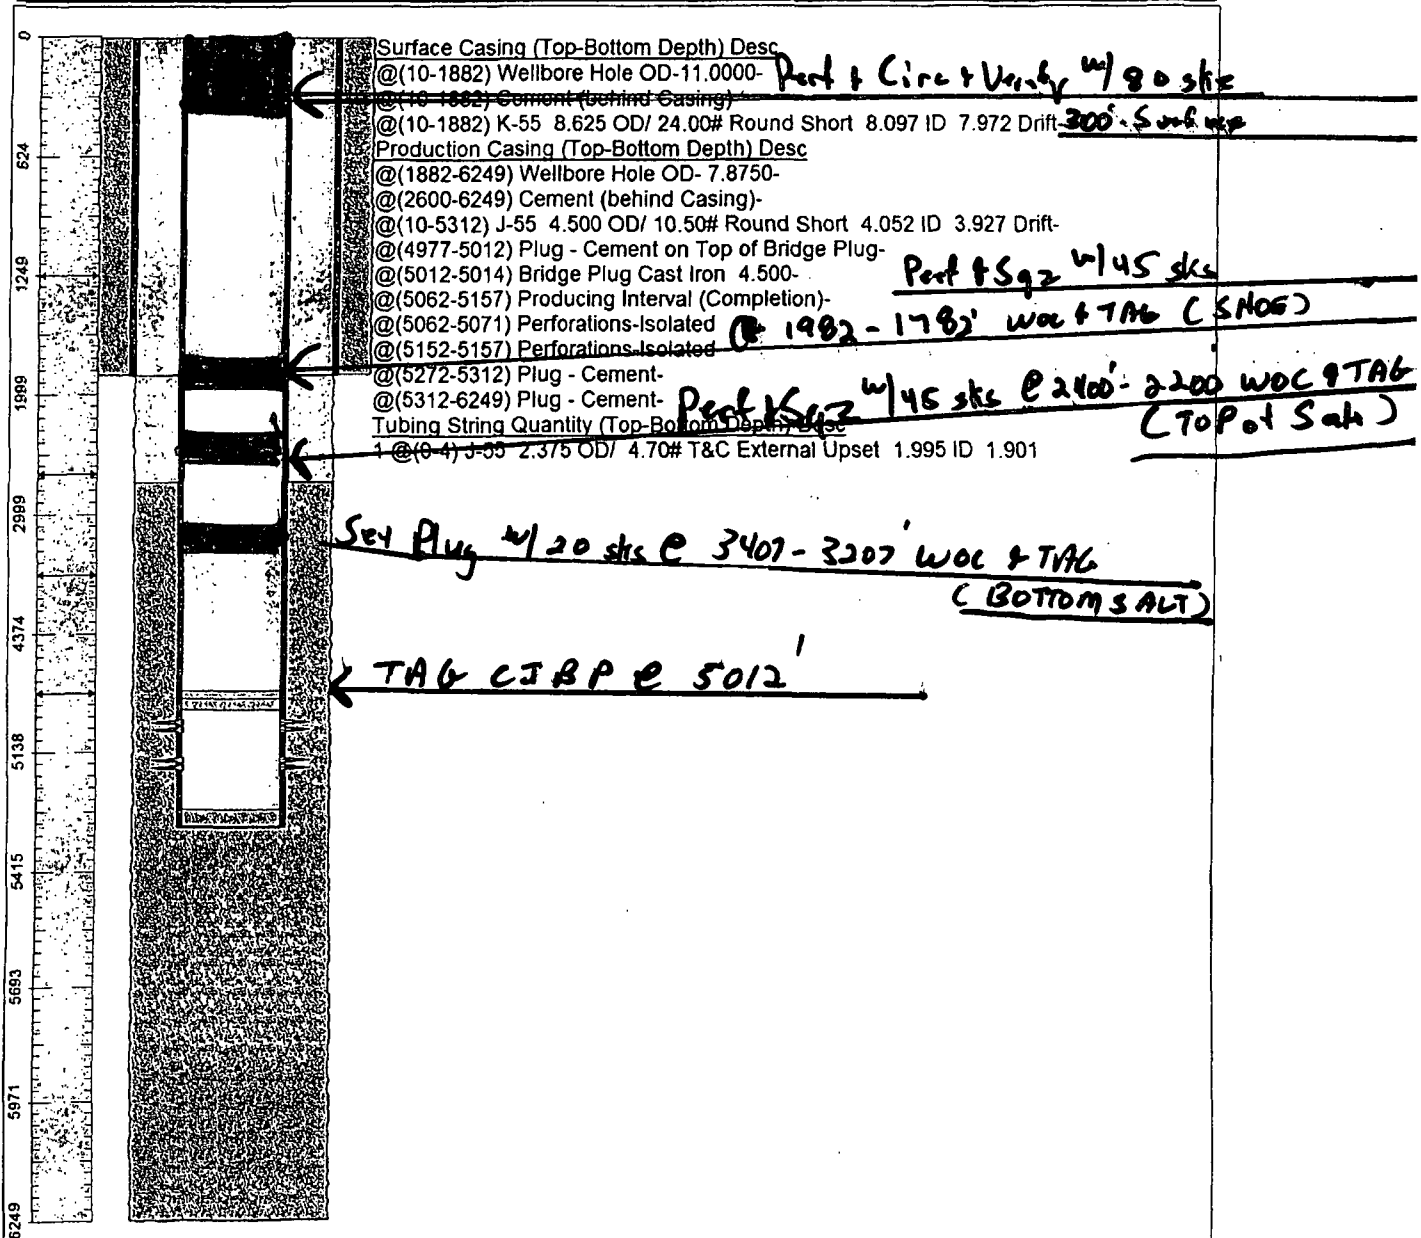

Ground Elevation (MSL): 3980.00	Spud Date: 02/17/1981	Compl. Date: 01/01/1800
Well Depth Datum: Kelly Bushing	Elevation (MSL): 3990.00	Correction Factor: 10.00
Last Updated by: fitecl	Date: 04/29/2014	