

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-25285
1. Type of Well: Oil Well Gas Well ☒ Other		5. Indicate Type of Lease STATE ☒ FEE
2. Name of Operator CIMAREX ENERGY CO. OF COLORADO		6. State Oil & Gas Lease No.
3. Address of Operator 600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701		7. Lease Name or Unit Agreement Name COOPER STATE
4. Well Location Unit Letter N : 660 feet from the SOUTH line and 1980 feet from the WEST line Section 02 Township 24S Range 36E NMPM LEA County		8. Well Number 001
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,373' - GR		9. OGRID Number 162683
		10. Pool name or Wildcat JALMAT (GAS)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A
CASING/CEMENT JOB ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 4-1/2" CIBP @ 3,050' PUMP 35 SXS CMT. @ 3,050'-2,852' (T/YATES,B/SALT); WOC X TAG CMT. PLUG.
2) PUMP 25 SXS. CMT. @ 1,448'-1,328' (T/SALT); WOC X TAG TOP OF CMT. PLUG.
3) MIX X CIRC. TO SURF. 85 SXS. CMT. @ 665'-3'.
4) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE:

AGENT

DATE: 01/26/15

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

TITLE

DATE

Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office Must Be Notified
24 hours prior to the beginning of Plugging Operations.

E-PERMITTING

P&A NR

P&A R

INT to P&A

CSNG

CHG Loc

TA

FEB 03 2015




Original Operator: Doyle Hartman

Spudded: 5/28/76

Completed: 6/24/76

8 5/8" 28# csg @ 615
Cmt'd w/200sxs "C", circ'd cmt

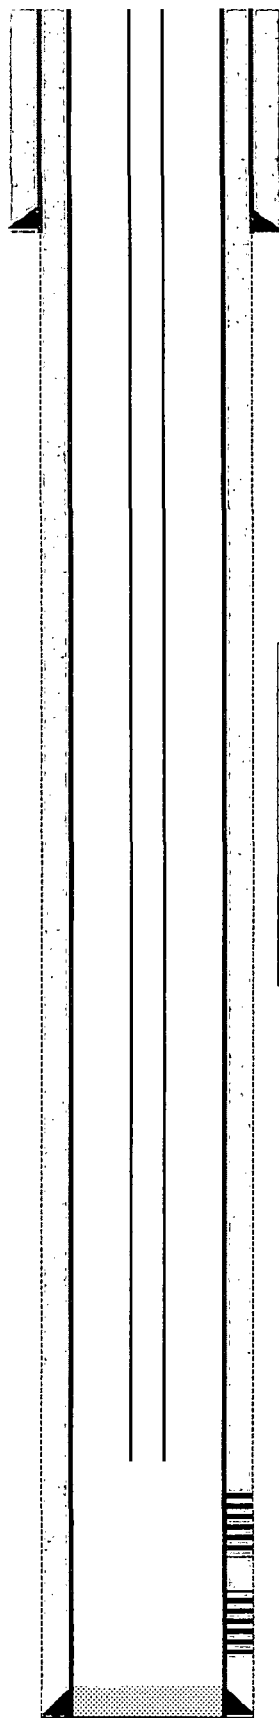

PBD: 3722'
TD: 3760'

Cimarex Energy Co. of Colorado

Cooper State #1

660' FSL & 1980' FWL

Sec. 2, T-24-S, R-36-E, Lea Co., NM

API #: 30-025-25285

GL: 3373'

KB: 3384' (11' AGL)

J Piwetz

01h N

11/18/2014

**NOTE: MOST DATA FROM NMOC D FILES
TUBING 7 ROD DATA MAY NOT BE ACCURATE**

Run 2/3/2000

Quantity	TUBING DETAIL	Length	Setting Depth
115	2-3/8" J-55 tbg	3618.82	3629.82
1	API SN	1.10	3630.92
1	2-3/8" J-55 tbg OE MA	31.70	3662.62
ROD DETAIL			
1	2" x 1-1/4" x 12' RWBC pump	12.00	
143	3/4" x 25' Normis	3575.00	
4	3/4" Pony rods	20.00	
1	1-1/4" x 12' PRL + 1-1/2" x 8' PRS	12.00	

Yates Perfs: 3071 - 3189' (12 holes) (6/76)

7 Rivers Perfs: 3261 - 3535' (12 holes) 6/76

4-1/2" 10.5# K-55 Casing @ 3760'
w/800 sx "C" Econolite + 400 sx 50/50 Poz "C"
Circulated

Original Operator: Doyle Hartman

Spudded: 5/28/76

Completed: 6/24/76

8 5/8" 28# csg @ 615
Cmt'd w/200sxs "C", circ'd cmt

Cimarex Energy Co. of Colorado

Cooper State #1

660' FSL & 1980' FWL

Sec. 2, T-24-S, R-36-E, Lea Co., NM


API #: 30-025-25285

GL: 3373'

KB: 3384' (11' AGL)

J Piwetz

11/18/2014

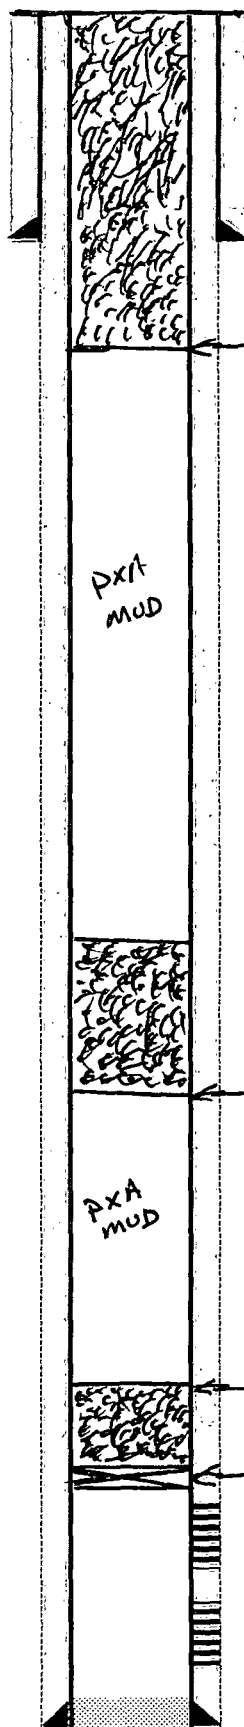

CIRC. 85 SXS.CMT. @ 665'-3.1'

Pump 25 SXS.CMT. @ 1448'-1328'-TAG

Pump 35 SXS.CMT. @ 3050'-2852'

SET 4 1/2" CSBP @ 3050'

Yates Perfs: 3071 - 3189' (12 holes) (6/76)

7 Rivers Perfs: 3261 - 3535' (12 holes) 6/76

4-1/2" 10.5# K-55 Casing @ 3760'

w/800 sx "C" Econolite + 400 sx 50/50 Poz "C"

Circulated

PBD: 3722'
TD: 3760'

DAE 01/25/15