

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-33407
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Byers
8. Well Number 001
9. OGRID Number 12627
10. Pool name or Wildcat Garrett; Abo, East
11. Elevation (Show whether DR, RKB, RT, GR, etc.)

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
Kevin O. Butler & Associates Inc.

3. Address of Operator
550 W. Texas Ste 660 Midland, TX 79701

4. Well Location
 Unit Letter C : 995 feet from the N line and 1932 feet from the W line
 Section 29 Township 16S Range 39E NMPM Lea County

HOBBS OCD
FEB 29 2016

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK	INT TO PA <u>PA</u>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS	P&A NR <u>PA</u>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB	P&A R <u>PA</u>
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER:	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Proposes to PA as follows.

- 8 5/8" CSA 2277'. Cemented with 1000 sks cement. (Circ)
- 4 1/2" CSA 8271'. Cemented with 250 sks cement TOC 7097 by calculation
- Open hole lateral 8271'-8783' BHL 1662 FNL X 1932 FWL Unit letter "F"
- CIBP set at 8225' capped with 25 sks cement Tagged - TAG & REPORT
- Displace well with gelled brine
- Perf and Sqz at 6288' with 30 sks cement x WOC x tag cement plug
- Perf and Sqz at 4965' with 30 sks cement x WOC x tag cement plug
- Perf and Sqz at 3058' with 30 sks cement x WOC x tag cement plug at 2908 or above (Base of Salt)
- Perf and Sqz at 2327' with 40 sks cement x WOC x tag cement plug at 2105' or above (Top of Salt and surface shoe)
- Perf and circulate cement to the surface at 350'

REMOVE ANCHORS COMPLETELY
Install below grade marker (4') and GPS before covering.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Billy E. Prichard TITLE Agent for Kevin O Butler DATE 2/24/16
 Type or print name Billy E. Prichard E-mail address: billy@pwllc.net PHONE: 432 934 7680
For State Use Only
 APPROVED BY: Neal Whitaker TITLE: Petroleum Engr. Specialist DATE 03-01-2016
 Conditions of Approval (if any):

MAR 03 2016

Kevin O Butler and Associates
Byers # 1
API 30-025-33407
Unit Letter "C", Section 29, T16S, R39E
Lea County, New Mexico

995 FNL X 1932 FWL



WWW.PWLLC.NET

8 5/8" CSA 2277' in 12 1/4" Hole
Cmt w/ 1000 sks (Circulated)

TOC 7097' by calculation

4 1/2" CSA 8271' in 7 7/8" hole
Cmt w/ 250 sks Cmt
TOC 7097' by Calculation

BHL 1662 FNL X 1932 FWL
UL "F", Sec 29, T16S, R39E


OH 8271-8783'

Kevin O Butler and Associates
 Byers # 1
 API 30-025-33407
 Unit Letter "C", Section 29, T16S, R39E
 Lea County, New Mexico

995 FNL X 1932 FWL



WWW.PWLLC.NET

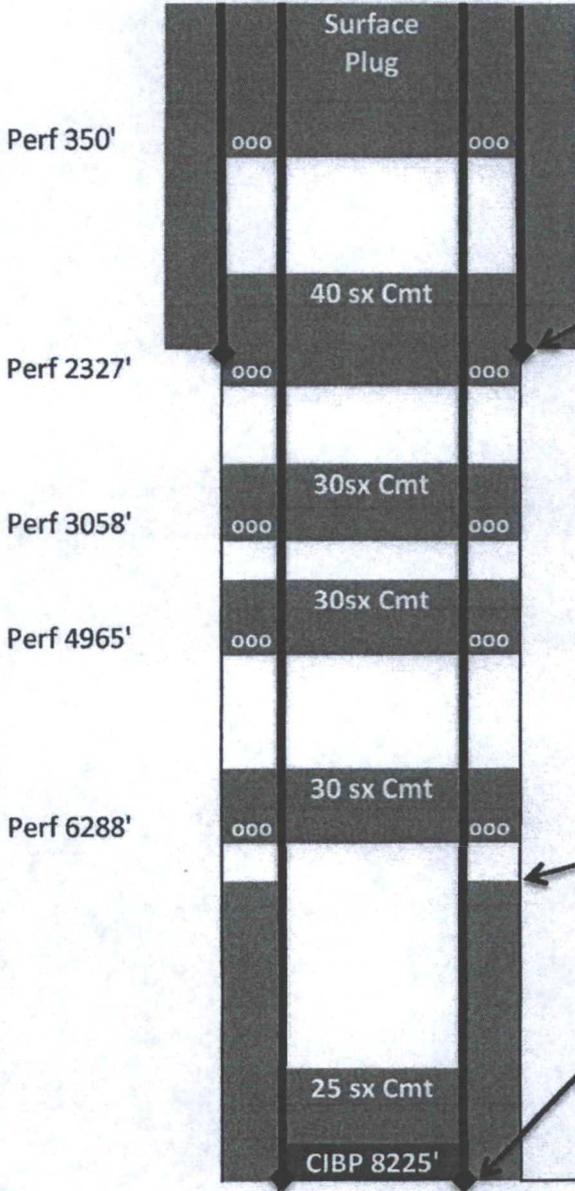

8 5/8" CSA 2277' in 12 1/4" Hole
 Cmt w/ 1000 sks (Circulated)

- Anhy 2097'
- T.Salt 2155'
- B.Salt 2958'
- Yates 3136'
- San Andres 4915'
- Glorieta 6238'
- Tubbs 7682'
- Abo 8300'

TOC 7097' by calculation

4 1/2" CSA 8271' in 7 7/8" hole
 Cmt w/ 250 sks Cmt
 TOC 7097' by Calculation

BHL 1662 FNL X 1932 FWL
 UL "F", Sec 29, T16S, R39E

OH 8271-8783'