

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD
JUN 09 2016
RECEIVED

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-33717
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name STATE 19
8. Well Number 1
9. OGRID Number 6137
10. Pool name or Wildcat JOHNSON RANCH; WOLFCAMP, WEST

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other

2. Name of Operator
Devon Energy Production Company, LP

3. Address of Operator
333 W. Sheridan Avenue, Oklahoma City, OK 73102

4. Well Location

Unit Letter G : 1865 feet from the North line and 2165 feet from the East line
Section 19 Township 24S Range 33E NMPM Lea County, NM

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3567 KB; 3541' GL; 26' KB to GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
CLOSED-LOOP SYSTEM ☐
OTHER: ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPNS.
CASING/CEMENT JOB

INT TO PA pm. ✓
P&A NR _____
P&A R _____

OTHER: _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU P&A Unit. Retrieve 2-7/8" production tubing from WB Packer @ 13,597'.
2. Set CIBP @ 13,595'. Tag plug. Spot 25 sx (115') CI H @ 13,595' - 13,480'. (Wolfcamp perfs @ 13,656' - 13,801')
3. Spot 125 sx (490') CI H @ 12,530' - 12,040'. Tag. (T. Wolfcamp @ 12,249'. Liner top @ 12,152')
4. Spot 60 sx (160') CI H @ 9,050' - 8,890'. (3000' spacer; T. Bone Spring @ 8,971')
5. Spot 40 sx (130') CI C @ 5,890' - 5,760'. (3000' spacer) Pressure test csg.
6. Perf 9-5/8" csg @ 5,080'. Pump 200 sx (350') CI C in/out @ 5,080' - 4,730'. Tag. (shoe @ 5,022'; T. Delaware @ 5,013'; B. Salt @ 4,774')
7. Perf 9-5/8" @ 1,730'. Pump 190 sx (330') CI C in/out @ 1,730' - 1,400'. Tag. (3000' spacer; T. Salt @ 1,499')
8. Perf 9-5/8" @ 700'. Pump 75 sx (130') CI C in/out @ 700' - 570'. (shoe @ 650') TAG
9. Perf 9-5/8" @ 130'. Pump 75 sx CI C in/out to surface.
10. Cut wellhead off. Set dry hole marker.

Circulate mud laden fluid between amt plugs
Spot 40 sx cmt at 10,998' WOC + Tag

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE Production Technologist DATE 6-7-16

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dmv.com PHONE: 405-552-4615

For State Use Only

APPROVED BY: Mah Whitaker TITLE Petroleum Engr. Specialist DATE 6/13/2016
Conditions of Approval (if any):

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: STATE 19 #1		Field: JOHNSON RANCH; WOLFCAMP, WEST	
Location: 1865' FNL & 2165' FEL; SEC 19-T24S-R33E		County: LEA	State: NM
Elevation: 3567' KB; 3541' GL; 26' KB TO GL		Spud Date: 1/31/97	Compl Date: 7/1/97
API#: 30-025-33717	Prepared by: Ronnie Slack	Date: 6/12/13	Rev:

CURRENT WELLBORE

✓ 26" Hole
20", 94#, K55, BTC, @ 650'
Cmt'd w/1660 sx to surf

✓ 17-1/2" Hole
13-3/8", 61#, 68#, 72#, @ 5,022'
Cmt'd w/4225 sx to surf

Guns fired prematurely. Sqzd 10,933'-48' w/150 sx
Re-sqzd w/150 sx. (4/2/98)

✓ Top of 7-5/8" Liner @ 12,152'

✓ 12-1/4" Hole
9-5/8", 53.5#, P110, LTC, @ 12,480'
Cmt'd w/2250 sx. Ran CBL, TOC reported @ 5700'-3/25/97

Sqz perms @ 13,616'-13,618'; sqzd w/100 sx

WOLFCAMP (5/8/98)
13,656' - 13,801'

Sqz perms @ 13,998'-14,000'; sqzd w/100 sx (3/12/98)

ATOKA BANK (12/31/97)
14,360' - 14,372'

Sqz perms @ 14,408'-10'; sqzd w/100 sx (11/10/97)

ATOKA BANK (11/21/97)
14,497' - 14,512'

Sqz perms @ 14,670'-72'; sqzd w/100 sx (11/9/97)


Sqz perms @ 14,816'-18'; sqzd w/100 sx (11/8/97)

MORROW (7/1/97)
15,174' - 15,180'; 15,276' - 283'; 15,376' - 384'

Sqz perms @ 15,495'-97'; 15,535'-37'; sqzd w/920 sx

8-1/2" Hole
7-5/8" 42# & 44#, Q125, Butt & LTC Liner @ 15,549'
Cmt'd w/920 sx. TOC @ 12,180' (cbl-5/28/97)

6-1/8" HOLE

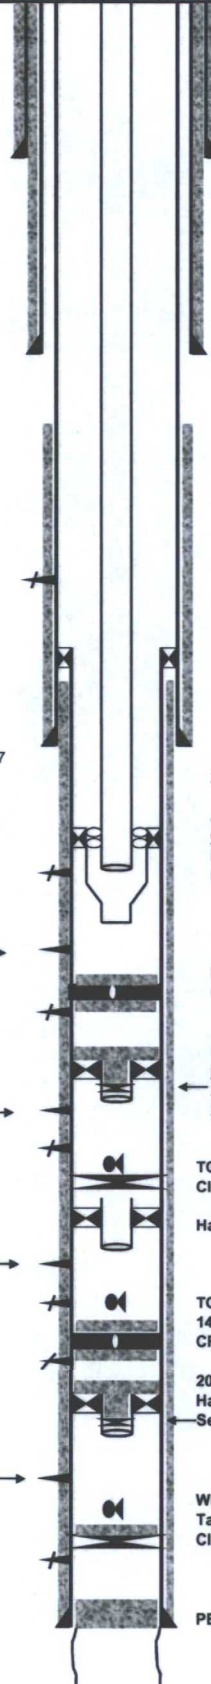

15,950' TD

T.Salt--1,499'
B.Salt--4,774'
T. Delaware--5,013'
Bone Spring--8,971'
Wolfcamp--12,249'
Cisco--13,664'
Strawn--14,086'
Atoka--14,356'

2-7/8", 7.9#, PH-6, Production tubing (5/7/98)

J Latch, 2" seals
Otis WB Pkr @ 13,597' (5/1/98)
R Nipple (2.188 id) @ 13,610'
Re-entry guide, EOT @ 13,624'

Drill out & tag @ 13,980' (4/30/98)
CR @ 13,994. (3/9/98)

10' sand, 10' cmt, Est PBD @ 14,275' (3/7/98)
BWB Packer @ 14,295' (1/1/98)
2.1 Alpha CIBP in tail pipe @ 14,305' (3/6/98)
2-7/8 TBG @ 14309

TCP guns dropped. TOF @ 14,377' (1/6/98)
CIBP @ 14,396' (12/30/97)

Halliburton BWB Pkr @ 14,421', w/15' seal ext (11/22/97)

TCP guns dropped. Tagged TOF @ 14,736' (11/25/97)
14,802' PBD (11/19/97)
CR @ 14,816, sqz w/100 sx (11/5/97)

200# sand + 10' cmt. PBD @ 15,000' (11/7/97)
Halliburton 212 BWB Pkr @ 15,020' (6/28/97)
Set alpha (CIBP) plug in tail pipe @ 15,053' (11/6/97)

Wireline tools & wire
Tagged @ 15,460'. (6/6/97)
CIBP 15,484', w/27' cmt- 6/5/97

PBD @ 15,536'

DEVON ENERGY PRODUCTION COMPANY LP

Well Name: STATE 19 #1		Field: JOHNSON RANCH; WOLFCAMP, WEST	
Location: 1865' FNL & 2165' FEL; SEC 19-T24S-R33E		County: LEA	State: NM
Elevation: 3567' KB; 3541' GL; 26' KB TO GL		Spud Date: 1/31/97	Compl Date: 7/1/97
API#: 30-025-33717	Prepared by: Ronnie Slack	Date: 6/7/16	Rev:

