

Submit 1 Copy to Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
October 13, 2009

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-01131	✓
5. Indicate Type of Lease STATE ☒ FEE ☐	✓
6. State Oil & Gas Lease No. 302600	
7. Lease Name or Unit Agreement Name New Mexico AT State	✓
8. Well Number 3	✓
9. OGRID Number 213190	✓
10. Pool name or Wildcat Saunders; Permo, Upper Penn	✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4199 GL'	

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-104) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
CrownQuest Operating, LLC

3. Address of Operator
P.O. Box 53310, Midland, TX 79710

4. Well Location
Unit Letter **P** : **660** feet from the **S** line and **660** feet from the **E** line
Section **15** Township **14S** Range **33E** NMPM County **Lea**

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT

REMEDIAL WORK
COMMENCE DRILLING OPERATIONS
CASING/CEMENT JOB

INT TO PA **Am.**
P&A NR _____
P&A R _____

OTHER: ☐

OTHER: _____

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Set 5 1/2 CIBP @ 9700', circulate hole w/ mud laden fluid, spot 25 sx cmt on top of CIBP. Pressure test csg.
2. Perf & Sqz 50 sx cmt @ 7050-6900'. WOC & Tag.
3. Cut and POH w/ 5 1/2 csg @ 4150'.
4. Spot 85 sx cmt @ 4200-4100'. WOC & Tag.
- ✓ 5. Spot 40 sx cmt @ 2600-2500'.
- ✓ 6. Spot 40 sx cmt @ 1700-1800'.
- ✓ 7. Spot 60 sx cmt @ 414-314'. WOC (Shoe) & TAG
8. Spot 10²⁵ sx cmt @ 60¹⁰⁰' to surface.

Cut off wellhead. Verify cement to surface all strings. Install dry hole marker

Spud Date: _____

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Bernie Montgomery TITLE Agent DATE 6-9-16
Type or print name Bernie Montgomery E-mail address: bernie@bcmanandassociates.com PHONE: 432-580-7161
For State Use Only

APPROVED BY: Neah Whitaker TITLE Petroleum Engr. Specialist DATE 6/14/2016
Conditions of Approval (if any): _____

Cat 3


Wellbore Schematic (From Surface to TD)

Printed: 3/7/2016

New Mexico AT State # 3

Property#: 10002

API # 3002501131

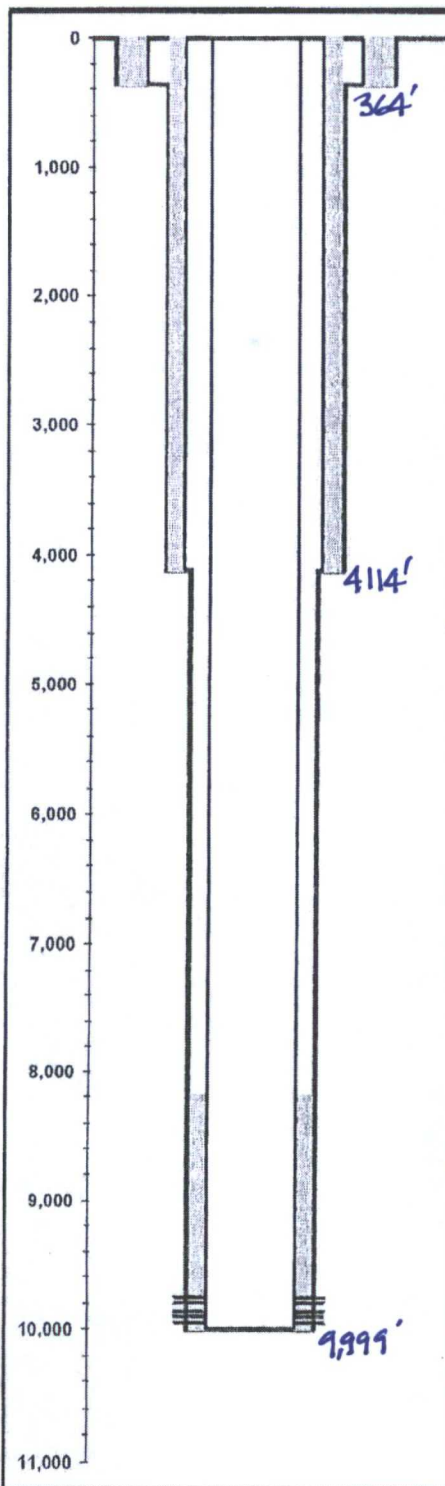

680' FSL & 660' FEL	GL Elev: 4,199.00	KOP:	
Sec, Blk, Sur (Lbr, Lge, Sur) or (Sec, Twn, Rng): 15, ,	Fill Depth:		
County, State: Lea, NM	PBTD:	9,997.00	
Aux ID: 200754-03	TD:	10,000.00	
KB = ; DF = ; All Depths Corr To:	BOP:		

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	364.00	4/7/1959
11.0000	364.00	4,114.00	4/14/1959
7.8750	4,114.00	9,999.00	5/21/1959

Surface Casing

Date Ran: 4/7/1959

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	9	13.3750	48.00		364.00	0.00	364.00

Intermediate Casing

Date Ran: 4/14/1959

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	134	8.6250	32.00	J55	4,114.00	0.00	4,114.00
24# & 32# H-40 & J-55.							

Production Casing String 1

Date Ran: 5/21/1959

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	304	5.5000	17.00	J55	9,999.00	0.00	9,999.00
J-55 7 N-80.							

Cement

# Sx	Class	Weight	ID	OD	Top At	Btm At	TOC Per
400	C		13.375	17.500	0.00	364.00	Circ
2400	C		8.625	11.000	0.00	4,114.00	Circ
350	C		5.500	7.875	8,180.00	9,999.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	TII #
9,748.00	9,753.00	PENN	A			4	24
(4 spf, 24 holes) 9748' - 9753'							
9,756.00	9,761.00	PENN	A			4	24
(4 spf, 24 holes) 9756' - 9761'							
9,796.00	9,806.00	PENN	A			4	44
(4 spf, 44 holes) 9796' - 9806'							
9,850.00	9,856.00	PENN	A			4	28
(4 spf, 28 holes) 9850' - 9856'							
9,870.00	9,874.00	PENN	A			4	20
(4 spf, 20 holes) 9870' - 9874'							
9,898.00	9,910.00	PENN	A			4	52
(4 spf, 52 holes) 9898' - 9910'							
9,948.00	9,958.00	PENN	A			2	22
(2 spf, 22 holes) 9948' - 9958'							

T. ANHY 1664'

B. SALT 2540'

Lat 33.0991631

Long -103.5958633