

Submit 1 Copy To Appropriate District
Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-36465
5. Indicate Type of Lease STATE ☒ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name SHELLEY SHELLEY 36 STATE
8. Well Number 006 7
9. OGRID Number 162683
10. Pool name or Wildcat SKAGGS; DRINKARD

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	
2. Name of Operator CIMAREX ENERGY CO. OF COLORADO	
3. Address of Operator 600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701	
4. Well Location Unit Letter D : 990 feet from the NORTH line and 990 feet from the WEST line Section 36 Township 19S Range 37E NMPM LEA County	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,598' - GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT F	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	INT TO PA ☒ P&A NR ☐ P&A R ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 6,850'; PUMP 25 SXS. CMT. @ 6,850'-6,700'; CIRC. WELL W/ MUD LADEN FLUID. - Pressure test
- 2) PUMP 25 SXS. CMT. @ 5,528'-5,378' (T/GLOR.).
- 3) PUMP 25 SXS. CMT. @ 4,093'-3,953' (DV TOOL); WOC X TAG CMT. PLUG.
- 4) PUMP 25 SXS. CMT. @ 2,876'-2,756' (T/YATES, B/SALT); WOC X TAG CMT. PLUG.
- 5) PUMP 25 SXS. CMT. @ 1,580'-1,432' (8-5/8" CSG.SHOE, T/SALT); WOC X TAG CMT. PLUG.
- 6) MIX X CIRC. TO SURF. 20 SXS. CMT. @ 150'-3'.
- 7) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RUNLE 19.15.17.

Spud Date:

Rig Release Date

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE:

AGENT

DATE: 06/29/17

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

TITLE

Petroleum Engr. Specialist

DATE

07/05/2017

Conditions of Approval (if any):



KB - 18' above GL

Cimarex Energy Co. of Colorado

Shelley 36 State 7

990' FNL & 990' FWL

API: 30-025-36465 Property: 309615-040.01

Sec. 36, T-19-S, R-37-E, Lea Co., NM

S.Hanford

6/21/2017

8-5/8" 24# J55 STC @ 1530': cmt'd w/640
sx 1 stage to surface

DV Tool @ 4023'

5-1/2" 17# N80 LTC @ 7280': cmt'd
w/1260 sx 2 stages to surface

PBTD @ 7220'

TD @ 7280'

Tubing Detail

Shelley 36 State 7

KB 18

Ran: 4/20/2007

Qty	Description	Length	Depth
205	2-3/8" Tubing	6478.05	6496.05
1	2-3/8" x 5-1/2" TAC	3.00	6499.05
10	2-3/8" Tubing	315.96	6815.01
1	2-3/8" Standard SN	1.10	6816.11
1	2-3/8" Slotted SN	1.10	6817.21
1	2-7/8" x 2-3/8" Change over collar	0.00	6817.21
1	2-7/8" Slotted MJ	30.95	6848.16

Rod Detail

Ran: 4/20/2007

Qty	Description	Length	Depth
1	1-1/4" x 26' PR w/14' Liner	26.00	26.00
2	1" x 18' & 6' Pony	24.00	50.00
104	1" x 3.75' Fiberglass	3900.00	3950.00
111	7/8" Grade D Rods	2775.00	6725.00
1	7/8" x 26K Shear Tool	0.75	6725.75
1	7/8" x 25' Grade D Rod	25.00	6750.75
1	7/8" x 1' Lift Sub	1.00	6751.75
1	2" x 1-1/2" x 26' RHBC HVR	26.00	6777.75

Rustler 1486'
Tansill 2638'

Perfd Drinkard 6930'-6940' w/3 SFP (33 holes)



KB - 18' above GL

Cimarex Energy Co. of Colorado

Shelley 36 State 7

990' FNL & 990' FWL

API: 30-025-36465 Property: 309615-040.01

Sec. 36, T-19-S, R-37-E, Lea Co., NM


S.Hanford

6/21/2017

8-5/8" 24# J55 STC @ 1530'; cmted w/640
sx 1 stage to surface

T/SALT ~ 1,482'
B/SALT > 2,816'
T/YATES ~ 2,816'
T/CLOR. ~ 5,453'
T/ABO. ~ 7,165'

DV Tool @ 4023'

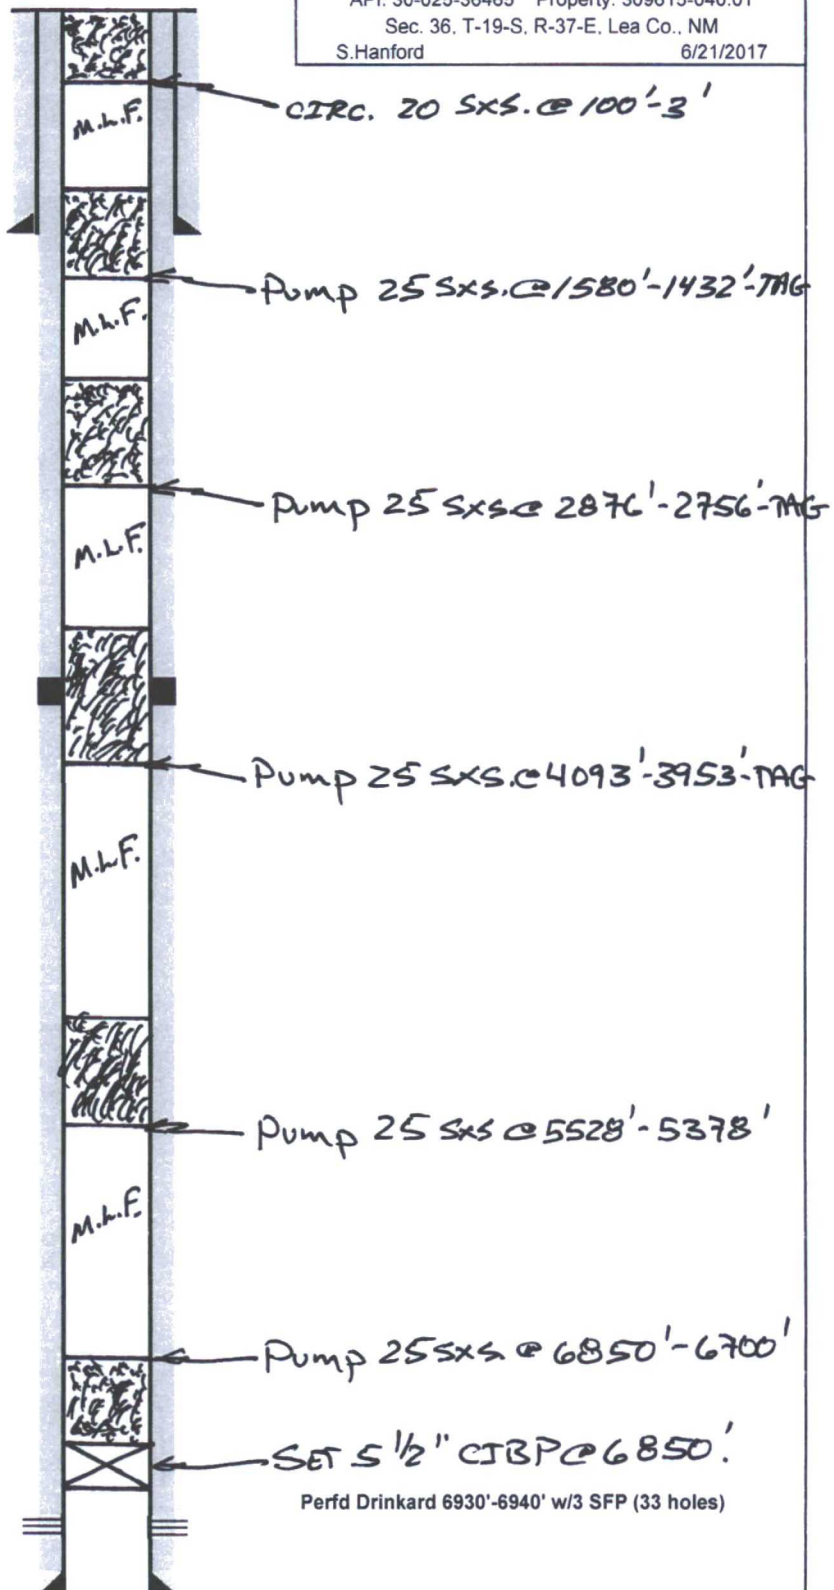

5-1/2" 17# N80 LTC @ 7280'; cmted
w/1260 sx 2 stages to surface

PBTD @ 7220'

TD @ 7280'

DAE 06/28/17.