Submit 1 Copy To Appropriate District Office
District I – (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II – (575) 748-1283
811 S. First St., Artesia, NM 88210
District III – (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV – (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-025-24955

5. Indicate Type of Lease STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

7. Lease Name or Unit Agreement Name
State FQ Gas Com

1. Type of Well: Oil Well ☒ Gas Well ☐ Other

8. Well Number: 1

2. Name of Operator
Chevron USA INC

9. OGRID Number
4323

3. Address of Operator
6301 DEAUVILLE BLVD., MIDLAND, TX 79706

10. Pool name or Wildcat
Antelope Ridge; Atoka (Gas)

4. Well Location
Unit Letter N : 660 feet from the South line and 1,980 feet from the West line
Section 26 Township 23S Range 34E NMPM County Lea

11. Elevation *(Show whether DR, RKB, RT, GR, etc.)*
3,441' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:				SUBSEQUENT	
PERFORM REMEDIAL WORK	☐	PLUG AND ABANDON	☒	REMEDIAL WORK	
TEMPORARILY ABANDON	☐	CHANGE PLANS	☐	COMMENCE DRILLING OPNS.	
PULL OR ALTER CASING	☐	MULTIPLE COMPL	☐	CASING/CEMENT JOB	
DOWNHOLE COMMINGLE	☐				
OTHER:	☐			OTHER: TEMPOR...	

INT TO PA PM x
P&A NR
P&A R

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. **16'' @ 792' TOC Surface, 10-3/4" @ 5,160' TOC 500', 7-5/8" @ 12,085' TOC 4,725', 5" @ 11,759'-13,890' TOC 12,045', Perforations 12,410'-12,448', 13,096'-13,103'-13, 13,380'-13,479', CIBP @ 13,050' w/ 35' cmt cap.**

Chevron USA INC respectfully request to abandon this well as follows:

1. Call and notify NMOCD 24 hrs before operations begin.
2. MIRU, NDWH, NU BOPE, POOH w/ packer and tbg.
3. Tag CIBP cement cap @ 13,015', spot 20 sx Class "H" cement f/ 13,015' t/ 12,815', WOC & tag.
4. Set CIBP @ 12,375', circ MLF, spot 140 sx Class "H" cement f/ 12,375' t/ 11,700', WOC, tag, & test.
5. Spot 50 sx CL "H" cement f/ 8,760' t/ 8,560' (Bone Springs).
6. Spot 50 sx CL "H" cement f/ 8,050' t/ 7,850', WOC & tag (DV Tool).
7. Spot 40 sx CL "C" cement f/ ~~5,200'~~ 5210' t/ 5,000', WOC & tag (Delaware, Shoe).
8. Perf @ 3,480' and sqz 85 sx CL "C" cement f/ 3,280 t/ 3,480', WOC & tag (DV Tool).
9. Perf @ 1,130' and sqz 85 sx CL "C" cement f/ 930' t/ 1,130', WOC & tag (B.Salt)
10. Perf @ 850' and sqz 500 sx CL "C" cement f/ Surface t/ 850' (Shoe, T.Salt, FW, Surf).
11. Cut all casings & anchors & remove 3' below grade. Verify cement to surface & weld on dry hole marker. Clean location.

Note: All cement plugs class "C" or "H" with closed loop system used.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.
SIGNATURE _____ TITLE Project Engineer DATE 8/22/17

Type or print name Howie Lucas E-mail address: howie.lucas@chevron.com PHONE: (832)-588-4044

For State Use Only

APPROVED BY: _____ TITLE Petroleum Engr. Specialist DATE 08/23/2017

Conditions of Approval (if any):

5

Current WBD - State FQ Gas Com 1 WBD

Lease--------	State FQ Gas Com	Updated------	08/21/17 By: Howie Lucas
Well #--------	1	Surf. Loc.----	660' FSL, 1,980' FWL
Field----------	Antelope Ridge; Atoka	Bot. Loc.-----	Same
County-------	Lea	Lat & Long	
State---------	NM	Unit Letter	N
Chevno-----	EO3449	Section	26
API #---------	30-025-24955	Township& Range	23S & 34E
Status--------	Shut-in Gas Well	Survey	N.M.P.M
Battery		Ini. Spud------	05/23/75
		Ini. Comp-------	09/17/75

KB: 3,462'
GL: 3,441'

Perforation and Stimulation History:
9/17/75: Initial completion with perforations and acidized
9/12/82: Set CIBP @ 13,320' for TA of lower zone, perforated above and acidized.
2/23/83: Drilled out CIBP and acidized perfs.
2/28/07: Set CIBP @ 13,050' for TA of lower zone, perforated above and acidized through arrowset packer.

Surface Casing
Size: 16"
Wt., Grd.: 65#, H-40
Depth: 792'
Sxs Cmt: 440 sx
Circulate: Yes
TOC: Surface
Hole Size: 20"

Intermediate Casing
Size: 10-3/4"
Wt., Grd.: 40.5#, N-80/S-95
Depth: 5,160'
Sxs Cmt: 4,500 sx
Circulate: No
TOC: 550'
Hole Size: 14-3/4"

Production Casing
Size: 7-5/8"
Wt., Grd: 29.7#/33.7#, S-95
Depth: 12,085'
Sxs Cmt: 2,450 sx
Circulate: No
TOC: 4,725'
Hole Size: 9-1/2"

Liner
Size: 5"
Wt., Grd: 18#, P-110
Depth: 11,759'-13,890'
Sxs Cmt: 205 sx
Circulate: No
TOC: 12,045'
Hole Size: 6-1/4"

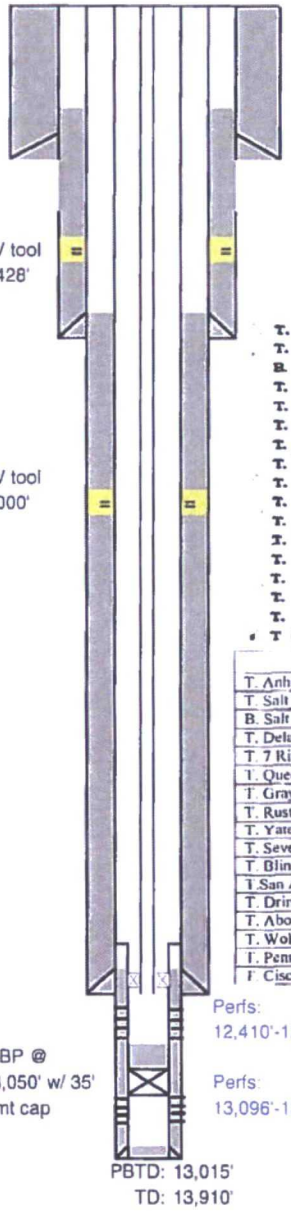

Packer Details:
-(388 jts) 2-3/8" N-80 tbg
-1-7/8" on/off tool
-5"x2-3/8" Arrowset packer
-10' tbg sub
-1.81' R Nipple
-6' tbg sub
-WL re-entry guide

Bottom of tbg @ 12,300'

T. Anhy 729	T. Canyon		T.
T. Salt	T. Strawn 12025		T.
B. Salt	T. Atoka 12258		T.
T. Yates	T. Miss 13860		T.
T. 7 Rivers	T. Devonian		T.
T. Queen	T. Silurian		T.
T. Grayburg	T. Montoya		T.
T. San Andres	T. Simpson		T.
T. Glorieta	T. McKee		Ba
T. Paddock	T. Ellenburger		T.
T. Blinebry	T. Gr. Wash		T.
T. Tubb	T. Granite		T
T. Drinkard	T. Delaware Sand 5150		T.
T. Abo	T. Bone Springs 8708		T.
T. Wolfcamp 11488	T. 2nd " " 9744		T.
T. Penn	T. 3rd " " 10275		T.
T Cisco (Bough C)	T. 4th " " 11224		T.

Southeastern New Mexico	
T. Anhy	T. Canyon
T. Salt	T. Strawn
B. Salt 1080'	T. Atoka
T. Delaware 5250'	T. Miss
T. 7 Rivers	T. Devonian
T. Queen	T. Silurian
T. Grayburg	T. Montoya
T. Rustler	T. Simpson
T. Yates	T. McKee
T. Seven Rivers	T. Ellenburger
T. Blinebry	T. Gr. Wash
T San Andres	T. Delaware Sand
T. Drinkard	T. Bone Springs 8710'
T. Abo	T. Rustler 770'
T. Wolfcamp	T. Glorieta
T. Penn	T. Yeso
T. Cisco (Bough C)	T.

Pulled from nearby well

Proposed WBD - State FQ Gas Com 1 WBD

Lease--------	State FQ Gas Com	Updated------	08/21/17 By: Howie Lucas
Well #--------	1	Surf. Loc.----	660' FSL, 1,980' FWL
Field---------	Antelope Ridge; Atoka	Bot. Loc.-----	Same
County-------	Lea	Lat & Long	
State---------	NM	Unit Letter	N
Chevno------	EO3449	Section	26
API #--------	30-025-24955	Township& Range	23S & 34E
Status--------	Shut-in Gas Well	Survey	N.M.P.M
Battery		Ini. Spud------	05/23/75
		Ini. Comp-------	09/17/75

KB: 3,462'
GL: 3,441'

Surface Casing
Size: 16"
Wt., Grd.: 65#, H-40
Depth: 792'
Sxs Cmt: 440 sx
Circulate: Yes
TOC: Surface
Hole Size: 20"

Intermediate Casing
Size: 10-3/4"
Wt., Grd.: 40.5#, N-80/S-95
Depth: 5,160'
Sxs Cmt: 4,500 sx
Circulate: No
TOC: 550'
Hole Size: 14-3/4"

Production Casing
Size: 7-5/8"
Wt., Grd: 29.7#/33.7#, S-95
Depth: 12,085'
Sxs Cmt: 2,450 sx
Circulate: No
TOC: 4,725'
Hole Size: 9-1/2"

Liner
Size: 5"
Wt., Grd: 18#, P-110
Depth: 11,759'-13,890'
Sxs Cmt: 205 sx
Circulate: No
TOC: 12,045'
Hole Size: 6-1/4"

Perforation and Stimulation History:
9/17/75: Initial completion with perforations and acidized
9/12/82: Set CIBP @ 13,320' for TA of lower zone, perforated above and
2/23/83: Drilled out CIBP and acidized perfs.
2/28/07: Set CIBP @ 13,050' for TA of lower zone, perforated above and through arrowset packer.

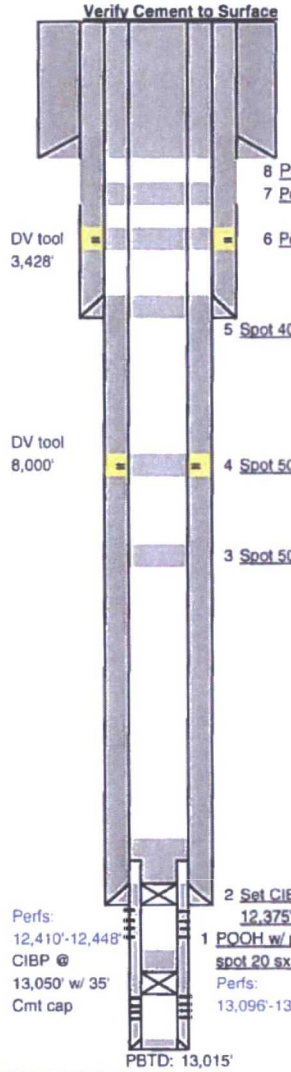

8 Perf @ 850' & sqz 500 sx CL "C" cmt f/ Surface t/ 850' (Shoe, T.Salt,
7 Perf @ 1,130' & sqz 85 sx CL "C" cmt f/ 930' t/ 1,130', WOC & tag (B.Salt)
6 Perf @ 3,480' & sqz 85 sx CL "C" cmt f/ 3,280' t/ 3,480', WOC & tag (DV Tool
5 Spot 40 sx CL "C" cmt f/ 5,200' t/ 5,000', WOC & tag (Delaware, Shoe))
4 Spot 50 sx CL "H" cmt f/ 8,050' t/ 7,850', WOC & tag (DV Tool)
3 Spot 50 sx CL "H" cmt f/ 8,760' t/ 8,560' (Bone Springs)
2 Set CIBP @ 12,375', circ MLF, spot 140 sx CL "H" cmt f/ 12,375' t/ 11,700', WOC, tag, & test (perfs, TOL)
1 POOH w/ packer and tbg, tag CIBP cmt cap @ 13,015', spot 20 sx CL "H" cmt f/ 13,015' t/ 12,815', WOC & tag

Perfs: 13,096'-13,103', 13,380'-13,479'

T. Anhy	729	T. Canyon		T.	
T. Salt		T. Strawn	12025	T.	
B. Salt		T. Atoka	12258	T.	
T. Yates		T. Miss	13860	T.	
T. 7 Rivers		T. Devonian		T.	
T. Queen		T. Silurian		T.	
T. Grayburg		T. Montoya		T.	
T. San Andres		T. Simpson		T.	
T. Glorieta		T. McKee		Ba	
T. Paddock		T. Ellenburger		T.	
T. Blinebry		T. Gr. Wash		T.	
T. Tubb		T. Granite		T	
T. Drinkard		T. Delaware Sand	5150	T.	
T. Abo		T. Bone Springs	8708	T.	
T. Wolfcamp	11488	T/ [illegible]	9744	T.	
T. Penn		T. [illegible]	10278	T.	
T. Cisco (Bough C)		T. [illegible]	11224	T.	

Pulled from nearby well

Southeastern New Mexico	
T. Anhy	T. Canyon
T. Salt	T. Strawn
B. Salt 1080'	T. Atoka
T. Delaware 5250'	T. Miss
T. 7 Rivers	T. Devonian
T. Queen	T. Silurian
T. Grayburg	T. Montoya
T. Rustler	T. Simpson
T. Yates	T. McKee
T. Seven Rivers	T. Ellenburger
T. Blinebry	T. Gr. Wash
T.San Andres	T. Delaware Sand
T. Drinkard	T. Bone Springs 8710'
T. Abo	T. Rustler 770'
T. Wolfcamp	T. Glorieta
T. Penn	T. Yeso
T. Cisco (Bough C)	T