

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-29551
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name BUCKEYE -B - 8601 JV-P
8. Well Number 002 SWD
9. OGRID Number 260297
10. Pool name or Wildcat SWD; ABO 96091

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
BTA OIL PRODUCERS LLC

3. Address of Operator
104 S. PECOS STREET, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter G : 1980 feet from the NORTH line and 1980 feet from the EAST line
Section 36 Township 17S Range 35E NMPM County LEA

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,890' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK	INT TO PA <u>PM</u> P&A NR _____ P&A R _____
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS.	
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER:	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP @ 9,250'; PUMP 35 SXS. CMT. @ 9,250'-9,030' (OLD B.S. PERFS.); CIRC. WELL W/ M.L.F.
- 2) PUMP 30 SXS. CMT. @ 6,916'-6,712' (T/B.S., T/GLOR.).
- 3) PUMP 40 SXS. CMT. @ 5,134'-4,870' (OLD S.A. PERFS., T/S.A.); WOC X TAG CMT. PLUG.
- 4) PUMP 70 SXS. CMT. @ 3,940'-3,450' (B/SALT, 8-5/8" CSG.SHOE); WOC X TAG CMT. PLUG.
- 5) PUMP 25 SXS. CMT. @ 1,430'-1,320' (T/SALT, T/SNAHY.); WOC X TAG CMT. PLUG.
- 6) MIX X CIRC. TO SURF. 55 SXS. CMT. @ 408'-3' (13-3/8" CSG. SHOE).
- 7) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

VERIFY CMT TO SURFACE

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS

Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyler TITLE: AGENT

DATE: 02/27/18

Type or print name: DAVID A. EYLER

E-mail address: deyler@milagro-res.com

PHONE: 432.687.3033

For State Use Only

APPROVED BY: Mark Whitaker TITLE: Petroleum Engr. Specialist DATE: 03/05/2018

Conditions of Approval (if any):

C103 INTENT TO P&A EXPIRES
03-05-2019

(3 STRING CSNG)

OPERATOR BTA OIL PRODUCERS, LLC

WELL # 002

SECT 36 TWN 17-S RNG 35-E
FROM 1980 N/S L 1980 E/W L
TD: 9,580' FORMATION @ TD B.S./ABC
PBTD: 9,580' FORMATION @ PBTD

X
X
X 13-3/8"
@ 358'
TOC SURF.
450 SX5

8-5/8"
@ 3,500'
TOC SURF.
500SXS

4974' - 5,084'
SQB.W / 2005x5

DV tot.
5186

9,080' - 9,157'
502. w/ 100 SXS

5-1/2"
@ 9,300'
TOC SURF.
2,200 SXS

O/H 9,300' - 9,580'

TD 9,580'

	SIZE	SET @	TOC	TOC DETERMINED BY	
SURFACE	13-3/8"	358'	SURF.	CIRC.	
INTMED 1	8-5/8"	3,500'	SURF.	CIRC.	
INTMED 2	5-1/2"	9,300'	SURF.	CIRC.	
PROD					
	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					
	CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	-	
INTMED 2			OPENHOLE	9,300' - 9,580'	
PROD					

*** REQUIRED PLUGS DISTRICT I**

RUSTLER (ANHYD)	
YARD 1/SALT	1,375'
CLUB 1/SALT	3,890'
GRAYBURG	
SAN ANDRES	4,920'
CAPTAIN REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRUSHY CANYON	
BONE SPRING	4,866'
GLORIETA	4,762'
BLINEBRY	
TUBB	
DRINKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
MORROW	
MISS	
DEVONIAN	

[illegible]

DAE 02-26-18

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

30-025-29551

OPERATOR BTA OIL PRODUCERS, LLC

LEASENAME BUCKEYE-B-8601 JV-P SWD

SECT 36 TWN

WELL # 002

FROM 1980 N/S L


17-S RNG 35-E

TD: 9,580'

FORMATION @ TD B.S./ABO

PBTD: 9,580'

FORMATION @ PBTD

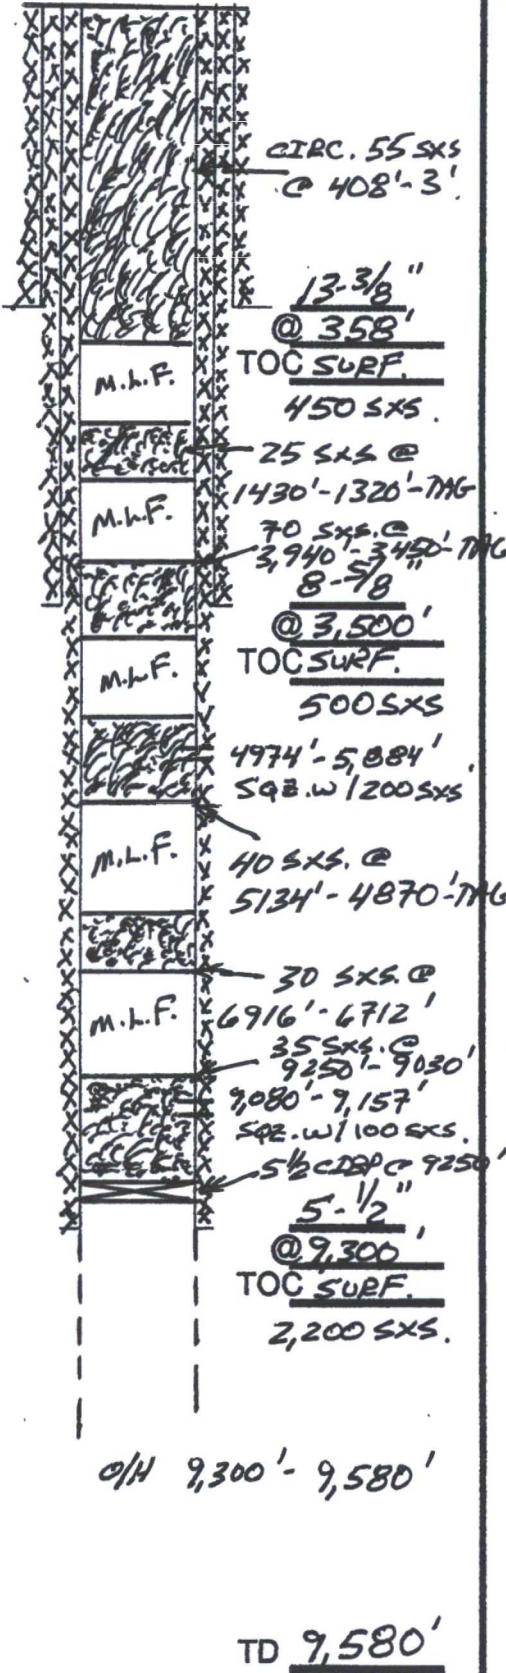

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	13-3/8"	358'	SURF.	CIRC.
INTMED 1	8-5/8"	3,500'	SURF.	CIRC.
INTMED 2	5-1/2"	9,300'	SURF.	CIRC.
PROD				
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2				
	CUT & PULL @		TOP - BOTTOM	
INTMED 1			PERFS	
INTMED 2			OPENHOLE	9,300' - 9,580'
PROD				

* REQUIRED PLUGS DISTRICT I

RUSTLER (ANHYD)	
YATES / SALT	1,375'
CLARK / SALT	3,870'
GRAYBURG	
SAN ANDRES	4,920'
CAPTAN REEF	
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRUSHY CANYON	
BONE SPRING	4,866'
GLORIETA	4,762'
BLINEBRY	
TUBB	
DRINKARD	
ABO	
WC	
PENN	
STRAWN	
ATOKA	
MORROW	
SCSS	
DEVONIAN	

PLUG	TYPE PLUG	SACKS CMNT	DEPTH
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIBP/35'		5300'
PLUG #3	CIBP	25 SXS	5300'
PLUG #4	STUB	50 SXS	4680'-4700'
PLUG #5	RETNR SQZ	200 SXS	400'
PLUG #7	SURF	10 SXS	0-10'
PLUG #1	CIBP		9,250'
PLUG #2		35 SXS	9,250'-9,880'
PLUG #3		30 SXS	6916'-6712'
PLUG #4		40 SXS	5134'-4870'
PLUG #5		30 SXS	3740'-3450'
PLUG #6		25 SXS	1430'-1320'
PLUG #7		55 SXS	408-3'
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #			
PLUG #			

DATE 02-26-18