

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-10142
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Brunson Argo
8. Well Number: 10
9. OGRID Number 4223 241333
10. Pool name or Wildcat Blinberry Oil & Gas; Drinkard

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Chevron USA, Inc. *Mid Continent, L.P.*

3. Address of Operator
6301 Deauville Blvd., Midland, TX 79706

4. Well Location
Unit Letter G : 1880 feet from the NORTH line and 1971 feet from the EAST line
Section 9 Township 22S Range 37E, NMPM, County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3448' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUB:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING ☐	☐
PULL OR ALTER CASING ☐	MULTIPLE COMPLETIONS ☐	CASING/CEMENT ☐	
DOWNHOLE COMMINGLE ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. 13 3/8" 48# @ 1106': TOC @ surface; 9 5/8" 36# @ 3920': TOC @ surface; 5 1/2" 17# @ 7901': TOC @ 3417' (calculated)

Chevron USA, Inc respectfully requests to abandon this well as follows:

- MIRU, pull rods, N/U BOPE, pull tubing. Schedule to run a CBL after Step 4 and prior to Step 5. Discuss results with engineer/NMOCD to determine if spot in Step 6 needs to be turned into perf & squeeze.
- Tag CIBP @ 6298'.
- Spot 25 sx CL "C" cement plug f/ 6298' t/ 6070'. WOC & tag
- Set CIBP @ 5400', circulate well w/ 9.5 ppg gel KCl water, and pressure test casing t/ 900 psi for 10 min.
- Spot 50 sx CL "C" cement plug f/ 5400' t/ 4938' (Glorieta). If pressure test in Step 4 failed, then WOC & tag. If pressure test in Step 4 was successful, do not WOC. *4030'*
- Spot 50 sx CL "C" cement plug f/ 3970' t/ 3502' (Shoe, San Andres, Grayburg). WOC & tag
- Perf & squeeze 100 sx CL "C" cement f/ 2612' t/ 2340' (Yates, B. Salt). WOC & tag
- ~~Perf & squeeze 55 sx CL "C" cement f/ 1750' t/ 1600' (T. Salt). WOC & tag.~~
a. ~~If able to get circulation to surface, then go ahead and squeeze additional 370 sx to surface~~
- Perf & squeeze 420 sx CL "C" cement f/ 1156' t/ surface (Fresh Water) *T.SALT, Shoe Plug*
a. If previously circulated cement to surface in Step 8.a., then spot 125 sx to surface
- Verify top of cement at surface on all casing strings

CHECK
13 3/8 x 9 5/8
ANNULUS
FOR FLOW

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE *[Signature]* TITLE *P&A Engineer* DATE *4/18/2018*

Type or print name *Nick Glann* E-mail address: *nglann@chevron.com* PHONE: *432-687-7786*

For State Use Only

APPROVED BY: *Mah Whitaker* TITLE *Petroleum Engr. Specialist* DATE *04/24/2018*

Conditions of Approval (if a

NOTIFY OCD 24 HOURS PRIOR TO
BEGINNING PLUGGING OPERATIONS


C103 INTENT TO P&A EXPIRES
1 YEAR FROM DATE OF APPROVAL

* TOP SALT
≈ 1200'

CURRENT
WELLBORE DIAGRAM

Lease: Brunson Argo Well No: 10 API: 30-025-1014200 Cheb No.: FB1145
Location: Sec: 9 Blk: Survey: T5
County: Lea State: New Mexico 32.408435 LAT 103.1657667
Find: Blinberry WBS: BCU46AA00 Cost Center

Directions to Wellsite:

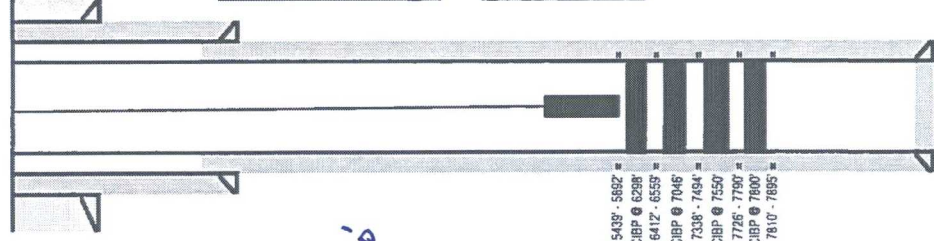

Surface CASING	
Size	13 3/8
Wt	48# H 40
Set @	1106
Sx5 cm	600 sxs
Cm Date	1/5/46
Circ	Yes

Intermediate CASING	
Size	9 5/8
Wt	36# J 5'
Set @	3920
SxS Cmt	400 sks
Cmt Date	1/20/46
Circ	yes

Production CASING	
Size	5 1/2
Wt	17# J.55
Set @	7800
Sx# Cmt	798 sks
Cmt Date	2/15/46
Circ:	no
TOC	3417
	Calculated

Formation Taps	
T. Salt	1,700
B. Salt	2,440
Yates	2,562
Grayburg	3,602
San Andres	3,823
Golieta	5,038
Blinberry	5,509
Tubb	6,009
Drinkard	6,823
Abo	6,590

P8TD	6.278
YD	7.901

Remarks:

Tubing Detail	Equipment	Size	EUE Plain	Threads	No. Joints	Feet
Tubing 4.7# J-55		2 3/8	EUE	Unknown	170	5,312
TAC		2 3/8	EUE	Unknown	1	3
Tubing 4.7# J-55		2 3/8	EUE	Unknown	21	659
Blast Joint		2 3/8	EUE	Unknown	1	31
Sear Nipple/Shoe		2 3/8	EUE	Unknown	1	2
Tubing 4.7# J-55		2 3/8	EUE	Unknown	1	4
Percutated Tubing Sub		2 3/8	EUE	Unknown	1	4
Tubing 4.7# J-55		2 3/8	EUE	Unknown	1	31
Tubing 4.7# J-55		2 3/8	EUE	Unknown	1	31
Tubing 4.7# J-55		2 3/8	EUE	Unknown	1	31
Total						6108

Rod Detail	Size	Manufacturer	No. of Rods	Length	Grade
	1 1/4	POLISHROD	1	22	
	7/8	Sinker Bar	1	4	
	3/4	Rods	149	3725	
	7/8	Rods	89	2225	
	7/8	Rod Sub	1	6	
	7/8	Rod Sub	1	2	
	1.125"	Insert Pump	1	16	
		Total		6000	

Updated By: Chris Hodge
Date: 2/1/18

**PROPOSED
WELLBORE DIAGRAM**

Lease: Brunson Argo Well No: 10 API: 30-025-1014200 Chev No.: FB1145
 Location: Sec: 9 Blk: Survey: TS
 County: Lea State: New Mexico LAT: 32.4084435 LONG: -103.1657867
 Field: Blinebry WBS: Cost Center: BCU46AA00
 Directions to Wellsite:

Surface CASING

Size: 13 3/8
 Wt.: 48#, H-40
 Set @: 1106
 Sxs cmt: 800 sks
 Cmt Date: 1/5/46
 Circ: Yes

Intermediate CASING

Size: 9 5/8
 Wt.: 36#, J-55
 Set @: 3920
 Sxs Cmt: 400 sks
 Cmt Date: 1/20/46
 Circ: yes

Production CASING


Size: 5 1/2
 Wt.: 17#, J-55
 Set @: 7901
 Sxs Cmt: 798 sks
 Cmt Date: 2/15/46
 Circ: no
 TOC 3417 Calculated

Formation Tops

T. Salt 1,700
 B. Salt 2,440
 Yates 2,562
 Grayburg 3,602
 San Andres 3,823
 Glorieta 5,038
 Blineberry 5,509
 Tubb 6,009
 Drinkard 6,823
 Abo 6,590

PBTD: 6,278
 TD: 7,901

Remarks:

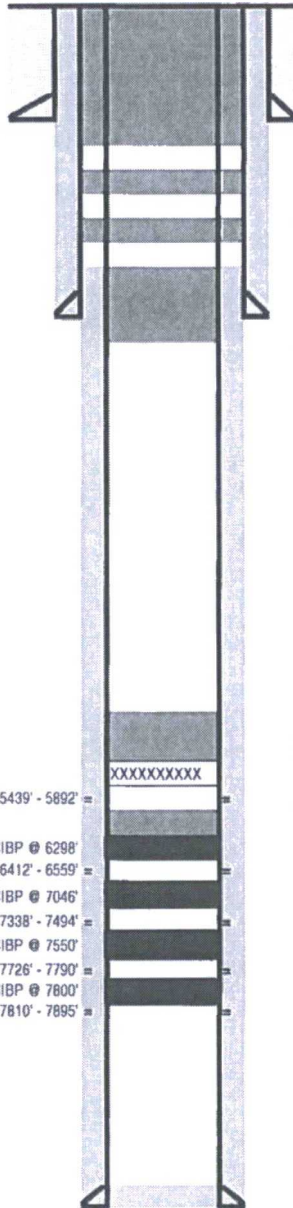

KB: 3,433.0
 GL: 3,433.0
 Spud Date: 12/2/45
 Compl. Date: 2/18/1946

P/S 420 sx CL C cmt f/ 1156' V surface (Fresh Water)

P/S 55 sx CL C cmt f/ 1750' V 1600' (T. Salt). WOC & tag

P/S 100 sx CL C cmt f/ 2612' V 2340' (Yates, B. Salt). WOC & tag

Spot 50 sx CL C cmt f/ 3970' V 3502' (Shoe, San Andres, Grayburg)
 WOC & tag

Spot 50 sx CL C cmt f/ 5400' V 4938' (Glorieta)
 Set CIBP @ 5400'

Tag CIBP @ 6298' & spot 25 sx CL C cmt f/ 6296' V 6070'. WOC & tag