

Submit 3 Copies To Appropriate District

Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO.

30-025-09941

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name:

Alice Paddock

8. Well No.

5

9. Pool name or Wildcat
Blinebry - Tubb

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Chevron USA Inc

3. Address of Operator

15 Smith Rd, Midland, TX, 79705

4. Well Location

Unit Letter B : 990 feet from the North line and 2310 feet from the East line

Section 1 Township 22-S Range 37-E NMPM Lea County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐


COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24 hrs prior to MI and RU.
2. Set 5 1/2 CIBP at 5450, spot 25sx, plug 5450-5300 (Blinebry - Tubb) WOC Tag.
3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.
4. Spot 30sx, plug 3050-2800 (8 5/8 shoe) WOC Tag.
5. Cut 5 1/2" csg at 2800, L/D csg.
6. Spot 70sx, plug 2800-2600 (Stub, B-Salt) WOC Tag.
7. Spot 60sx, plug 1300-1100 (T-Salt).
8. Perf 4 holes at 310, sqz 125sx, plug 310-Surf 8 5/8 x 13 3/8 (Surf) WOC Tag.
9. Install dry hole marker.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE G.R. Bledsoe TITLE HES Specialist

DATE 12/1/2003

Type or print name G.R. Bledsoe

Telephone No. (432) 687-7153

(This space for State use)

APPROVED BY Harry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE

Conditions of approval, if any:

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR CHEVRON USA INC.

LEASE NAME ALICE PADDOCK


WELL # 5

SECT 1 TWN 22-S RNG 37-E

FROM 990 NSL 2310 EWL ---

TD 6710 FORMATION @ TD TUBB

PBTD --- FORMATION @ PBTD BLINERY

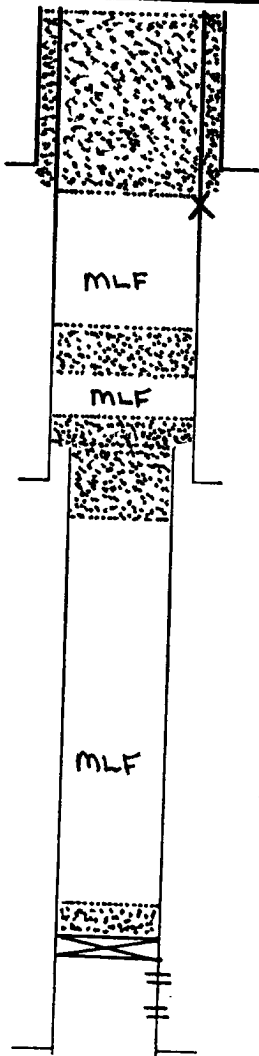

13 3/8
@ 257
TOC SURF

8 5/8
@ 2948
TOC 595

5 1/2
@ 6350
TOC 2935

TD 6710

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	<u>13 3/8</u>	<u>257</u>	<u>SURF</u>	<u>Circ.</u>
INTMED 1	<u>8 5/8</u>	<u>2948</u>	<u>595</u>	<u>T.S</u>
INTMED 2				
PROD	<u>5 1/2</u>	<u>6350</u>	<u>2935</u>	<u>T.S</u>

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL	TOP - BOTTOM
INTMED 1		PERFS <u>5517- 5828</u>
INTMED 2		OPENHOLE <u>6154- 6249</u>
PROD	<u>2800</u>	

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	25	5450
YATES	2	8 5/8 S	30	3050
QUEEN	3	STUB	70	2800
GRAYBURG	4	T-SALT	60	1300
SAN ANDRES	5	13 3/8 S	125	310
CAPTAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINERY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				