Form 3160-5 (August 2007)

RECEIVED STATES

FORM APPROVED

MAK 2 SE	UREAU OF LAND MANA	N I EKIUK GEMENT		CD HODDS	T?!	: July 31, 2010	
SUNDAY NOTICES AND REPORTS ON WI			KE	CEIVE	5. Lease Serial No.	5. Lease Serial No. NMLC071949	
Do not use this form for proposals to drill or to reabandoned well. Use form 3160-3 (APD) for such p				יים אינים ל	(It Indian Allamas	Talka Nama	
abandoned we	II. Use form 3160-3 (AP	D) for such p	roposals.	A A KNII	6. If Indian, Allottee	or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on rev				וטטפנוי	7. If Unit or CA/Agree	eement, Name and/or No.	
1. Type of Well ☐ Gas Well ☐ Other					8. Well Name and No KELLER 27 FED		
2. Name of Operator Contact: LINDA GOOD CHESAPEAKE OPERATING, INC. E-Mail: linda.good@chk.com					9. API Well No. 30-025-37906		
3a. Address P.O. BOX 18496 OKLAHOMA CITY, OK 7315	3b. Phone No Ph: 405-93		ea code)	10. Field and Pool, of BELL LAKE	Exploratory Delaware E		
4. Location of Well (Footage, Sec., 7	1)			11. County or Parish.	and State		
Sec 27 T23S R34E NESW 1967FSL 2055FWL			LEA COUNTY, NM				
			i				
12. CHECK APPI	ROPRIATE BOX(ES) TO) INDICATE	NATURE	OF NOTIO	CE, REPORT, OR OTHE	R DATA	
TYPE OF SUBMISSION		TYPE OF ACTION					
Notice of Intent	☐ Acidize	□ Dee	!		Production (Start/Resume)	□ Water Shut-Off	
Subsequent Report	☐ Alter Casing	•	ture Treat	_	Reclamation	■ Well Integrity	
****	Casing Repair	_	Constructi		Recomplete	□ Other	
☐ Final Abandonment Notice	☐ Change Plans		and Aband	_	emporarily Abandon		
	Convert to Injection	□ Plug	1	-	Water Disposal		
13. Describe Proposed or Completed Op If the proposal is to deepen direction Attach the Bond under which the wo following completion of the involved testing has been completed. Final Aldetermined that the site is ready for f	ally or recomplete horizontally, rk will be performed or provide operations. If the operation re bandonment Notices shall be fil inal inspection.)	give subsurface the Bond No. or sults in a multipled only after all	locations and file with BI completion requirements	I measured and LM/BIA. Requion or recompleting, including recompleting recomp	I true vertical depths of all perti uired subsequent reports shall b on in a new interval, a Form 31 clamation, have been completed	nent markers and zones. e filed within 30 days	
Chesapeake, respectfully, rec Plugging Procedure:	uests, permission to plug	i & abandon t	nis well pe	r the follow	ng ·		
Well Data			!		TOD FOR		
Tubing: 2-7/8" L-80 @ 8,605' Casing: 5-1/2" 17# L-80 @ 8, TOC: 4,930' (CBL) TD: 8,750'	750'	* ** *** **** **** **** **** **** **** ****	CONT	ATTAC DITION	HED FOR IS OF APPROVA	AL	
PBTD: 8,656' Elevation: 3,493' KB 3,475' G	ATTACHE						
14. I hereby certify that the foregoing is	true and correct. Electronic Submission # For CHESAPE	82375 verified AKE OPERAT	by the BLI NG, INC., s	M Well Inforsent to the H	mation System obbs		
Name (Printed/Typed) LINDA GOOD			Title SR. REGULATORY COMPLIANCE SPEC				
Signature (Electronic S	Submission)		Date 03/08/2010				
	THIS SPACE FO	R FEDERA	L OR ST	Λ	DDDAVED		
Approved By	Ill EG.	3/29/10	Title			Date	
Conditions of approval, if any are attache certify that the applicant holds legal or eq which would entitle the applicant to condi	uitable title to those rights in the	not warrant or e subject lease	Office		MAR 2 3 2010 Justin Winkler		

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

Additional data for EC transaction #82375 that would not fit on the form

32. Additional remarks, continued

TAC: 7,348' SN: 8,567'

Perforations: Delaware 7,533' ? 7,625' 8,150' ? 8,547'

Procedure (Basic Energy Services)

- 1. MI RU. ND WH. NU BOP.
 2. POOH rods. Laying down.
 3. POOH tbg. Standing back? will use tbg., if good.
 4. RIH Wireline. Set CIBP. @7,433'.
 5. RIH tbg. to circulate hole w/MLF. Cap 25 sx cmt.
 6. PUH to 5,131'. Spot 30 sx cmt. WOC & tag? a.m.
 7. ND WH. ND BOP. Weld on 5 1/2" PN.
 8. Cut & pull 4,000' of 5 1/2" csg.
 9. RIH tbg to 4,050'. Spot 50 sx cmt. WOC & tag.
 10. PUH to 2,000'. Spot 40 sx cmt.
 11. PUH to 1,500'. Spot 40 sx cmt.
 12. PUH to 350'. Spot 40 sx cmt. WOC & tag.
 13. PUH to 60'. Spot 20 sx? surface.

- 14. RDMO.
- 15. Install dryhole marker & clean location.
- Reclaim per BLM conditions. 16.

(CHK PN 610218)

Proposal - Workover



KELLER 27 FED 2

Field: Paloma Blanco Prospect LEA

County:


NEW MEXICO State:

Location: SEC 27, 23S-34E, 1967 FSL & 2055 FWL

Elevation: GL 3,475.00 KB 3,493.00

KB Height: 18.00

Spud Date: 6/12/2006 Initial Compl. Date: API#: 3002537906 CHK Propterty #: 610218 1st Prod Date: 8/12/2006 PBTD: Original Hole - 8656.0 TD: 8,750.0

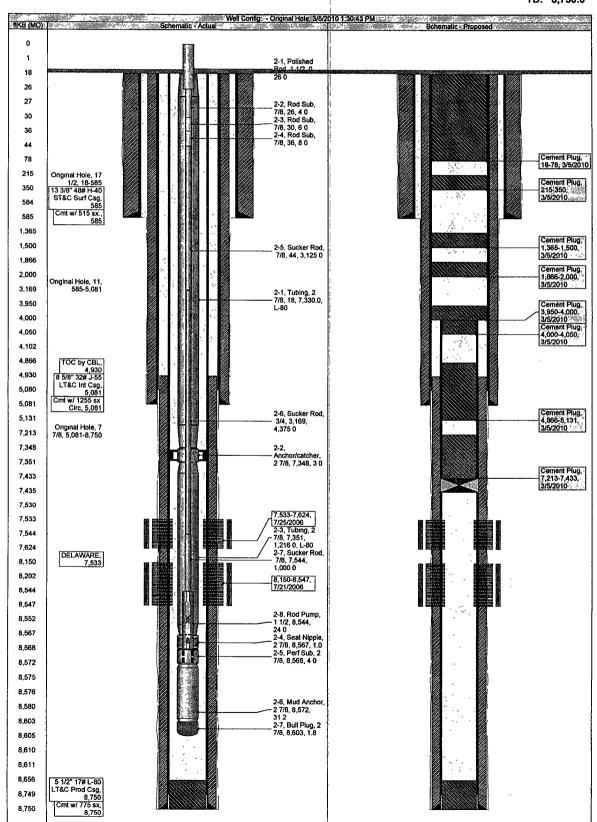

Chesapeake Operating, Inc.

NMLC-071949: Keller 27 Federal #2

API: 30-025-37906

Lea County, New Mexico

RE: Plugging and Abandonment Requirements, Conditions of Approval

H2S monitoring equipment to be on location.

- 1. OK
- 2. OK
- 3. OK
- 3a. Spot a plug from 8621'-8431'. (Bone Spring)
- 4. OK
- 5. OK (Perfs)
- 6. Tag at 4981' or shallower Otherwise OK (Casing Shoe Delaware BOS)
- 7. OK
- 8. OK
- 9. Tag at 3910' or shallower Otherwise OK (Stub)
- 10. OK (Spacer)
- 11. Move plug to 1100'-990' (minimum 25sx). WOC and tag at 990' or shallower (TOS)
- 12. Move to 635'-535'. Tag at 535' or shallower Otherwise OK (Casing shoe)
- 13. OK (Surface)
- 14. OK
- 15. OK
- 16. OK
- 17. Submit a subsequent report to the BLM.

See attached standard COAs.

DHW 031910

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

- 2 <u>Notification:</u> Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.
- 3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.
- 4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.
- 5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. In lieu of a cement plug in a cased hole, a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Any plug that requires a tag will have a minimum WOC time of 4 hours.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

- 6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified when the wellhead is cut off to verify that cement is to surface in the casing and all annuluses.** The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement. The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).
- 7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and five copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.**
- 8. <u>Trash:</u> All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation procedure.

DHW 112309



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Carlsbad Field Office 620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.blm.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- 1. The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months of well abandonment.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.
- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation

equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.

- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos Supervisory Environmental Protection Specialist 575-234-5909, 575-361-2648 (Cell)

Terry Gregston Environmental Protection Specialist 575-234-5958

Bobby Ballard Environmental Protection Specialist 575-234-2230

Randy Rust Environmental Protection Specialist 575-234-5943

Linda Denniston Environmental Protection Specialist 575-234-5974

Jennifer Van Curen Environmental Protection Specialist 575-234-5905

Justin Frye Environmental Protection Specialist 575-234-5922 Cody Layton Natural Resource Specialist 575-234-5959

Trishia Bad Bear Natural Resource Specialist 575-393-3612

Todd Suter Surface Protection Specialist 575-234-5987

Doug Hoag Civil Engineering Technician 575-234-5979