

Submit 3 Copies To Appropriate District Office

District I

1625 N French Dr, Hobbs, NM 88240

District II

1301 W Grand Ave, Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

1220 S St Francis Dr, Santa Fe, NM 87505

State of New Mexico

Energy, Minerals and Natural Resources

Form C-103

March 4, 2004

RECEIVED

SEP 24 2010

HOBBSOCD

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO. 30-025-05410
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington Paddock Unit
8. Well Number 144
9. OGRID Number 241333
10. Pool name or Wildcat Lovington; Paddock

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well:

Oil Well ☐ Gas Well ☒ Other Injection ☒

2. Name of Operator

Chevron Midcontinent, L.P.

3. Address of Operator

#15 Smith Rd., Midland, TX 79705

4. Well Location

Unit Letter B : 330 feet from the North line and 2310 feet from the East line

Section 6

Township 17-S Range 37-E NMPM Lea County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

Pit or Below-grade Tank Application (For pit or below-grade tank closures, a form C-144 must be attached)

Pit Location: UL B Sect 6 Twp 17-S Rng 37-E Pit type Steel Depth to Groundwater Distance from nearest fresh water well Over 1000'

Distance from nearest surface water Below-grade Tank Location UL Sect Twp Rng ;

330 feet from the North line and 2310 feet from the East line (Steel Tank)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL ☐ ALTERING CASING ☐

COMPLETION ☐ PLUG AND ABANDONMENT ☐

CASING TEST ☐ CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give proposed or completed estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore logs showing completion or recompletion.

1. Notify OCD 24 hrs. prior to MI and RU. Perf and squeeze 85sx cement plug from 350'-surface. (shoe/B-Salt/Yates) WOC&TAG
2. RIH tag CIBP@8150' and spot 25sx class "H" cement plug from 8150'-7950' (perfs). 7. Install dryhole.
3. Displace hole w/MLF, 9.5# Brine w/25# gel P/BBL.
4. Perf and squeeze 55sx cement plug from 5976'-5776' (Glorieta) WOC&TAG
5. Perf and squeeze 125sx cement plug from 3456'-2943' (shoe/B-Salt/Yates) WOC&TAG
6. Perf and squeeze 55sx cement plug from 2325'-2125' (T-Salt) WOC&TAG

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent for Chevron USA, Inc. DATE 9-23-2010


Type or print name M. Lee Roark E-mail address: Telephone No. 432-561-8600

(This space for State use)

APPROVED BY [Signature] TITLE STAFF MGR DATE 9-27-10

Conditions of approval, if any:

LPU #144
API No. 30-025-05410

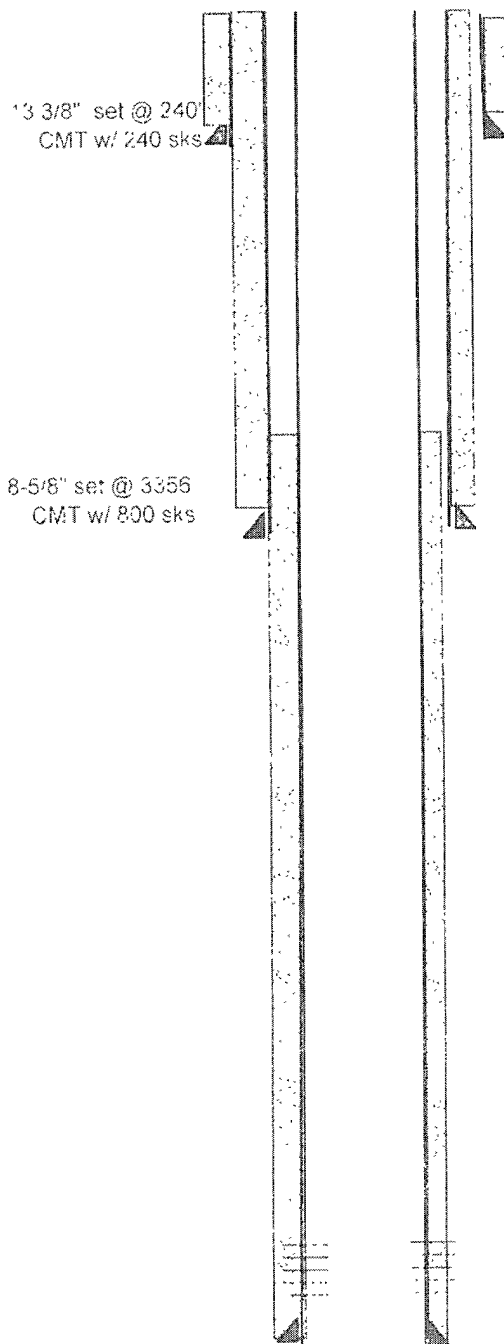

Well Location
330' FNL & 2310' FEL
Unit Letter B
Section 6
Township 17-S
Range 37-E
Lea County New Mexico
Elev 3820' DF

No data on TA

Perfs 8175-8320

5-1/2" CSG - set @ 8435'
CMT w/ 800 sks

ID - 8735

OPERATOR Chevron Midcontinent L.P.
 LEASENAME Lovington Padlock Unit

WELL # 144
 SECT 6 TWN 15 RNG 37E
 FROM 330 NSL 2310 EWL
 TD: 8735 FORMATION @ TD
 PBTD: FORMATION @ PBTD

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	13 3/8"	240	surface	calculated
INTMED 1	8 5/8"	3356'	surface	calculated
INTMED 2				
PROD	5 1/2"	8435	unknown	
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2				
	CUT & PULL @			TOP - BOTTOM
INTMED 1			PERFS	8178' - 8329'
INTMED 2			OPENHOLE	-
PROD				

* REQUIRED PLUGS DISTRICT *

KUTLER (AMTID)	1995'
YATES	3043'
QUEEN	
GRAYBIRD	
SAN ANDRES	4610'
T. SALT	2225'
CAPTAN REEF	
B. SALT	3150'
DELAWARE	
BELL CANYON	
CHERRY CANYON	
BRISBY CANYON	
BONE SPRING	
CLORITA	5976'
GLIMERY	
TUDS	7430'
OLDKARD	
ARO	8159'
WC	
PENH	
STRAWN	
ARDEA	
MOBROW	
SON	
DEVONIAN	

PLUG	TYPE	BACKS	DEPTH
PLUG	PLUG	CMNT	
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIRP/35'		5300'
PLUG #4	CIRP	25 SXS	5300'
PLUG #5	STUB	50 SXS	4600'-4700'
PLUG #6	RETRN SQZ	200 SXS	400
PLUG #7	SURF	10 SXS	0-10'
PLUG #8	CIRP	25sx	8150'-7950'
PLUG #9	Glorich	55sx	5976'-5776'
PLUG #10	Shoe	125sx	3456'-2943'
PLUG #11	B.SALT		
PLUG #12	Yates		
PLUG #13	T.SALT		2325'-2125'
PLUG #14	Shoe	85sx	350'-surface
PLUG #15	Fr. Ntr.		
PLUG #16	surface		
PLUG #17			
PLUG #18			
PLUG #19			
PLUG #20			
PLUG #21			
PLUG #22			
PLUG #23			
PLUG #24			
PLUG #25			

