

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

January 26, 1955  
(Date)Tatum, New Mexico  
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Amarada Petroleum Corporation  
(Company or Operator)State SR "A"  
(Lease)Noble Drilling Corporation  
(Contractor)

Well No. 1 in the SW 1/4 SW 1/4 of Sec. 14

T 9-S, R 32-E, NMPM, Wildcat Pool, Lea County.

The Dates of this work were as follows: January 27, 1955

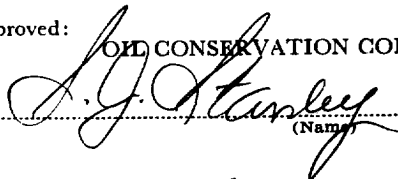
Notice of intention to do the work ~~was~~ (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_,  
(Cross out incorrect words)and approval of the proposed plan ~~was~~ (was not) obtained.

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3533' Total Depth. Line. Finished drilling 11" hole @ 4:15 AM, 1-25-55. Ran 69 joints of 8-5/8" casing set @ 3533' and cemented with 1500 sacks cement. Plug down to 3448' @ 7:36 PM on 1-25-55. Max. pump pressure - 1200#. Cement did not circulate. Ran temperature survey and found top of cement outside of 8-5/8" casing @ 684' or 60.0% fill. After W.O.C. for 24 hours tested 8-5/8" casing with 1200# for 1/2 hour - no pressure drop. Drilled cement from 3448' to 3533' and tested 8-5/8" casing with 1200# for 1/2 hour - no pressure drop. Started drilling 7-7/8" hole in formation @ 3533' @ 12:30 PM, on 1-27-55.

Witnessed by I. W. Wiseman  
(Name)Amarada Petroleum Corporation  
(Company)Foreman  
(Title)

Approved: OIL CONSERVATION COMMISSION


  
(Name)
Engineer District 1  
(Title)FEB - 1955  
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name

Position Assistant District Superintendent

Representing Amarada Petroleum Corporation

Address Baswell Star Route Tatum, New Mexico