

Submit 3 Copies To Appropriate District Office

District I
1625 N. French Dr., Hobbs, NM 87240

District II
811 South First, Artesia, NM 87210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-041-10166
1. Type of Well: Oil Well ☐ Gas Well ☐ Other WIW ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Saga Petroleum LLC		6. State Oil & Gas Lease No. E10047
3. Address of Operator 415 W. Wall, Suite 1900 Midland, TX 79701		7. Lease Name or Unit Agreement Name Todd Lwr SA Unit Sec. 36
4. Well Location Unit Letter A : 990 feet from the N line and 990 feet from the E line Section 36 Township 7S Range 35E NMPM County ROOSEVELT		8. Well No. 1
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 4165' DF		9. Pool name or Wildcat Todd Lower San Andres Assoc

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐

SUBSEQUENT REPORT OF:
REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOBS ☐
OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting and proposed work). SEE RULE 1103. For Multiple Completions: Attach diagram of proposed completion or recompletion.

Set CIBP @ 4000', dump 35' cmt on top (perfs 4235'-4258') Tag
100' plug @ 2035'-1935'
Cut & pull 4-1/2" csg, estimate 1000'
Spot 100' plug @ 4-1/2" stub, Tag
Spot 100' plug @ 8-5/8" shoe (50 in & 50 out) Btm of shoe @ 363', Tag
50' surface plug, install dry hole marker

Copy wellbore on back of form

12-1/4" hole - 8-5/8" 24# csg @ 363' w/250 sx
7-7/8" hole - 4-1/2" 9.5# csg @ 4325' w/200 sx
Pkr @ 4082.3'

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.


I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Bonnie Husband TITLE Production Analyst DATE 11/25/2002

Type or print name Bonnie Husband Telephone No. (915)684-4293
(This space for State use)

APPROVED BY GARY WINK DATE NOV 27 2002
Conditions of approval, if any: CC FIELD REPRESENTATIVE / STAFF MANAGER

Well: T5AM 36-14 (N.M. STATE HWY #2) W/1W
 Field: T500 Lower SAN ANTOJO

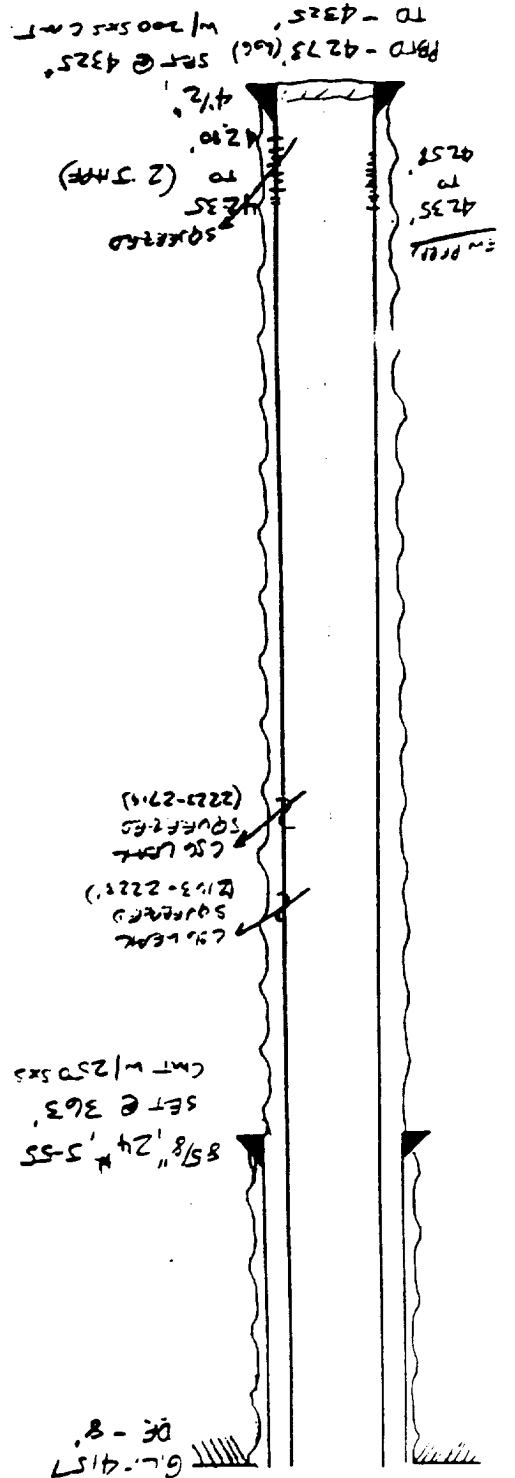

Alabany
 IPP - (3-17-65) 45 bond, 0.8 w/o, 43 micro
 PERFS: 4235, 42, 49, 53, 58, 68, 73, 80 (2 SHAF)
 INITIAL TREATMENT: ACIDATE W/2000 GALs AHO
 FRAC W/2000 GALs REF OIL W/20,000# SAND &
 551,000 #³ CO₂.
 ARE WELTEN TO DATE COMPLETION W/ P1
 GAS ZONE & STIMULATE. NO RECORD OF
 WATER EVER BEING DONE
 RE-FRAC WELL W/40,000 GALs REF OIL & 50,000 #
 SAND.
 WELL T-14
 11-84 DO TO 4320' G.L. (FOUND SPILL CSC FROM 4291-44')
 PUT OIL ON PUMP
 9-87 SQUEEZE BELOW 4185' 2005X5 F₅₀ = 1200#
 SQUEEZE BELOW 2100' 2005X5 F₅₀ = 900#
 MUKS - (2163-2223' & 2223-2719')
 D.O. TO 4285' TEST CSC TO 200 PSIG O.K.
 RE-REF: 4235, 36, 39, 42, 43, 44, 48, 49, 50, 52, 53, 57
 12 HOURS (1537K). SWAB TEST ONLY. AT D.O. & C
 W/2000 GALs 15% NECK HCL. SWAB TEST SHOW
 UP OIL W/40 DUMPS. RT ON PUMP.
 WELL ST
 T-14 W/2005X5 CEMENT-LINED T86 & A0-1 PER
 SET @ 4082 KB. PUT ON INTERFLOM FRA=1160

Location: 990' N.E. SEC. 36
 T-75, R-75
 DATE 5-14-91
 BY JG