

UNIT STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NM-0174830-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1.

OIL WELL ☒ GAS WELL ☐ OTHER

2. NAME OF OPERATOR

H. B. Rhoads & Associates

3. ADDRESS OF OPERATOR

Box 5032, Midland, Texas

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*

See also space 17 below.)

At surface

1980' FSL & 1980' FWL

Sec. 17, T-8-S, R-33-E

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Mona Federal

9. WELL NO.

2

10. FIELD AND POOL, OR WILDCAT

Undesignated

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec. 17, T-8-S, R-33 E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

4423' R.B.

12. COUNTY OR PARISH

Chaves

13. STATE

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Recompletion

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Report of recompletion in San Andres - Oct. 4 - 16, 1976.

Set CIBP at 5000' & capped with 35' cement. Perforated at 4470' set Model K cement retainer at 4355' & cemented with 600 sx. class "H" cement. Estimated TOC-3500'. Perforated 4220', 26', 36', 50', 46', 50' and 4278' - 4300'. Treated with 5000 gal. 15% NE acid. Swabed & tested. Ran pump & rods.

18. I hereby certify that the foregoing is true and correct

SIGNED Bill Baker

TITLE Agent

DATE 10-19-76

(This space for Federal or State office use)


APPROVED BY _____

TITLE _____

DATE _____

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

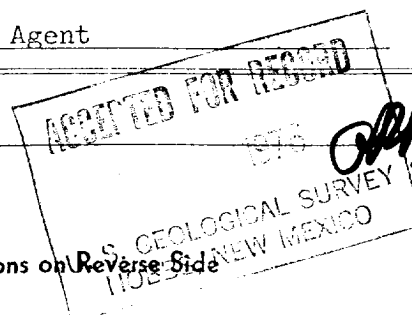

RECEIVED

NOV 2 1976

**OIL CONSERVATION COMM.
HOBBS, N. M.**