


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

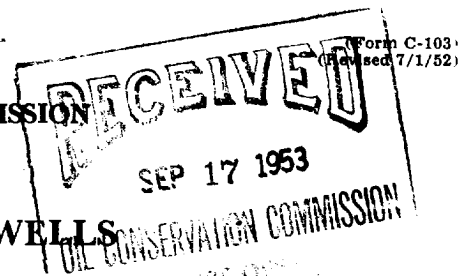

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

September 15, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

The Ohio Oil Company

(Company or Operator)

J. M. Denton

(Lease)

Company tools, Rig #4

(Contractor)

Well No. **11** in the **SE** $\frac{1}{4}$ **SE** $\frac{1}{4}$ of Sec. **11**

T. **15 S**, R. **37 E**, NMPM, **Denton-Wolfeamp** Pool, **Lea** County.

The Dates of this work were as follows:.....

Notice of intention to do the work (was) (was not) submitted on Form C-102 on....., 19....., (Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Total Depth 9315' Lins. Ran 275 joints of 5-1/2" casing set @ 9313'. Ran D. V. tool @ 8600'. Cemented first stage w/315 sacks sloc set cement w/3% gel. Pumping pressure 500#, final pressure 1500#. Circulated out estimated 70 sacks. Second stage cemented w/1327 sacks sloc set cement w/3% gel. Cement did not circulate. Pumping pressure 1800#, final pressure 3000#. Plug pumped down @ 12:45 a. m. 9-11-53. Found top of cement @ 8543'. Tested casing above D. V. tool w/1000# pressure for 1 hr., test ok. Tested casing below D. V. tool w/1500# pressure for 1 hr., test ok. Now drilling cement plug.

Witnessed by **L. H. Davis** **The Ohio Oil Company** **Tool Pusher**
(Name) (Company) (Title)

Approved: **OIL CONSERVATION COMMISSION**

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name **D. L. Lawrence**

Position **Superintendent**

Representing **The Ohio Oil Company**

Address **Box 2107, Hobbs, New Mexico**

[Signature]
(Name)

Engineer District **V** **SEP 21 1953**
(Title) (Date)