

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO.
30-025-23596

5. Indicate Type of Lease
STATE ☐ FEE ☒

6. State Oil & Gas Lease No.
13857

7. Lease Name or Unit Agreement Name

Mattie Price

8. Well No.

4

9. Pool name or Wildcat

West Garrett Devonian

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
OIL WELL ☒ GAS WELL ☐ OTHER

2. Name of Operator
Osborn Heirs Company

3. Address of Operator
P. O. Box 17968, San Antonio, TX 78286

4. Well Location
Unit Letter 0 : 980 Feet From The south Line and 1650 Feet From The east Line
Section 6 Township 17S Range 38E NMPM Lea County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)
3725.7' GR

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

Casing record: 13-3/8", 48# casing set to 407', cemented to surface.
8-5/8", 32# & 24# casing set to 5209', cemented to @ 3520'.
5-1/2", 20# & 17# casing set to 12,847', cemented to 12,330' in 2 stages.

Open hole: 12,847' to 13,095'

Plugging procedure:

- 1) 4 sx (35') 12,803-12,838' on top of EZ Drill Plug.
- 2) 25 sx 8,504-8730'.
- 3) 65 sx 5,123-5259' (50 sx outside 5-1/2", 15 sx inside).
- 4) 65 sx 3364-3500' (50 sx outside 5-1/2", 15 sx inside).
- 5) 115 sx 271-407' (50 sx outside 8-5/8", 50 sx outside 5-1/2", 15 sx inside).
- 6) 10 sx 3-98', set steel plugging marker.

Plugging to commence upon approval of procedure.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Gary A. Cunningham TITLE Engineer DATE 2/3/94
TYPE OR PRINT NAME Gary Cunningham TELEPHONE NO. 210-826-0700

(This space for State Use)

ORIGINAL SIGNED BY JERRY SEXTON
DISTRICT I SUPERVISOR

APPROVED BY _____ TITLE _____ DATE _____

CONDITIONS OF APPROVAL, IF ANY:

THE OIL CONSERVATION DIVISION MUST BE NOTIFIED 24
HOURS BEFORE THE BEGINNING OF
PLUGGING OPERATIONS FOR THE C-103
TO BE IN EFFECT.


FEB 08 1994


RECEIVED

OCB HOEBS
OFFICE

OSBORN HEIRS COMPANY
"PROPOSED PLUGGING DIAGRAM"
(CASING REMOVED)

Mattie Price #4
 API No. 30-025-23596
 980' FSL & 1,650' FEL
 Sec 6-T17S-R38E
 West Garrett Field
 Lea County, New Mexico

Cut 13-3/8" csg 3' below ground level and  install steel plugging marker.

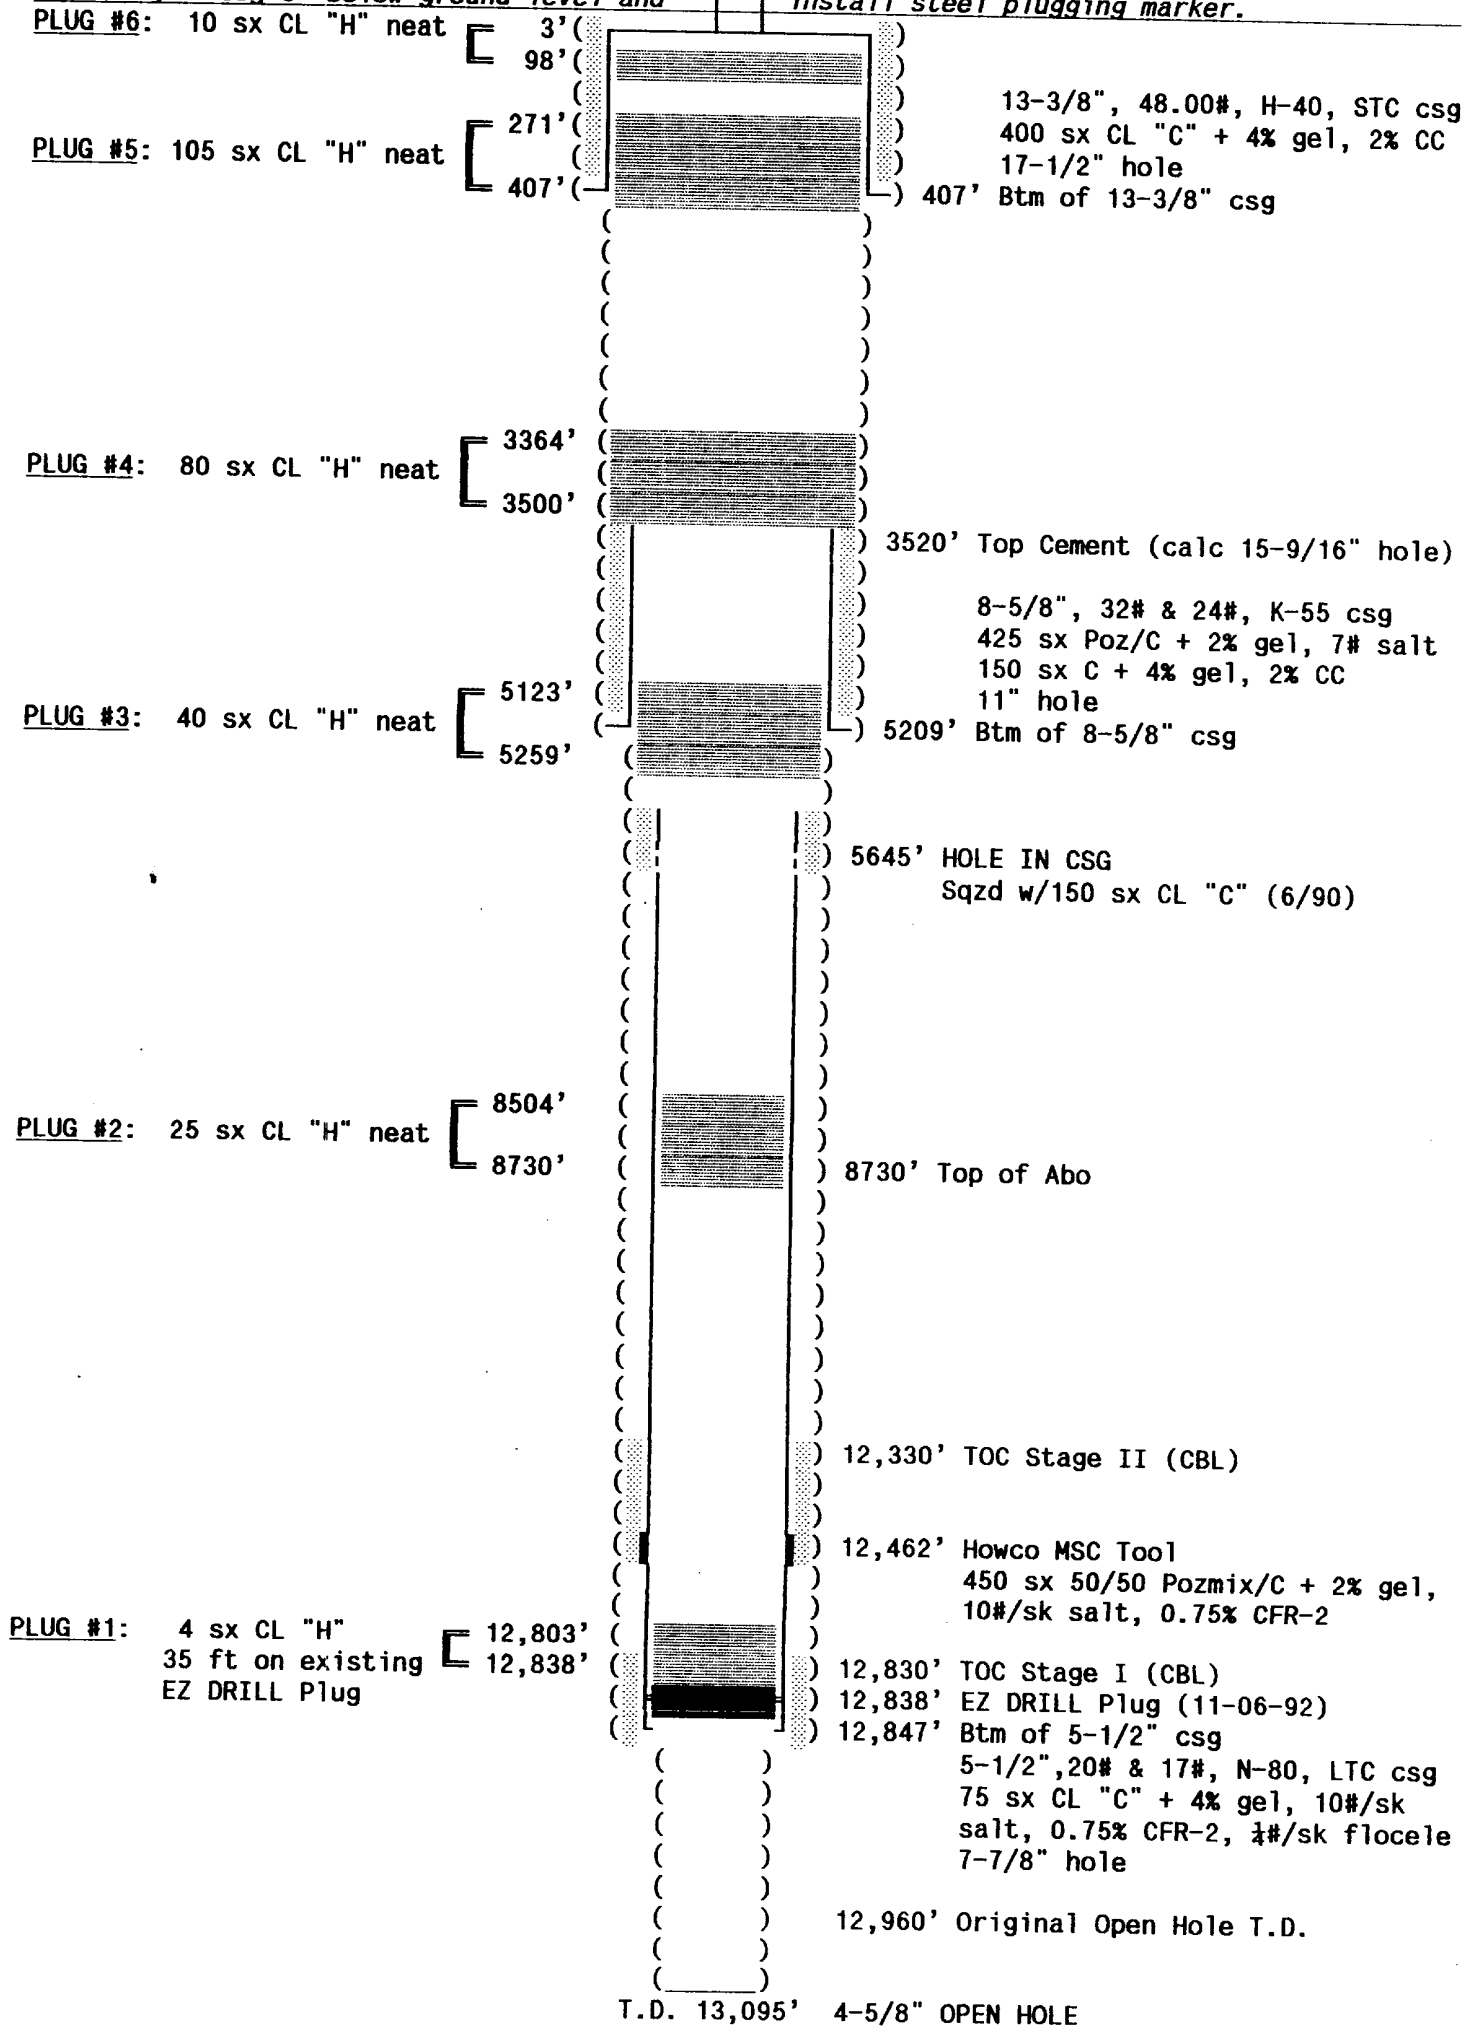

Date prepared: 02-02-94