

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
P.O. Box 2088
Santa Fe, New Mexico 87504-2088

WELL API NO. 30-025-29167
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-1520
7. Lease Name or Unit Agreement Name BRIDGES STATE
8. Well No. 197
9. Pool name or Wildcat VACUUM GRAYBURG SAN ANDRES
10. Elevation (Show whether DF, RKB, RT, GR, etc.) GL 4014; KB 4027

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:
OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. Name of Operator
Mobil Producing Tx. & N.M. Inc.*

3. Address of Operator *Mobil Exploration & Producing U.S. Inc., as Agent for
Mobil Producing TX. & N.M. Inc., P. O. Box 633, Midland, TX 79702

4. Well Location
Unit Letter E : 2630 Feet From The NORTH Line and 1310 Feet From The WEST Line

Section 24 Township 17-S Range 34-E NMPM LEA County

10. Elevation (Show whether DF, RKB, RT, GR, etc.)
GL 4014; KB 4027

11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK ☐	REMEDIAL WORK ☐
TEMPORARILY ABANDON ☐	ALTERING CASING ☐
PULL OR ALTER CASING ☐	COMMENCE DRILLING OPNS. ☐
OTHER: ☐	PLUG AND ABANDONMENT ☐
	CASING TEST AND CEMENT JOB ☐
	OTHER: ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
POOH W/RODS, 150 JT 2-7/8 TGB & TBG ANCHOR AT 4553. RIH W/CIBP & WS TO 4500. LOAD HOLE W/9.5 PPG MUD.
CAP CIBP W/35 FT CLASS C CMT.
PUH TO 2952. SPOT 100 FT CLASS C CMT PLG ACROSS YATES TOP AT 2902 FROM 2952-2852.
PUH TO 1790. SPOT 120 FT CLASS C CMT PLUG ACROSS 8-5/8 CSG SHOE AT 1725 & SALT OP AT 1739 FROM 1790 TO 1670.
PUH TO 30. SPOT 30 FT CLASS C CMT PLUG FROM 30 TO SURFACE. POOH W/WS.
ND BOP. RD PU. DIG OUT CELLAR & CUT CSG 3 FT BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P & A MARKER WITH WELL NAME & PLUGGED DATE. FILL CELLAR & CLEAN SURFACE LOCATION.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Kaye Pollock TITLE REGULATORY TECHNICIAN DATE 06-15-93
(915)
TYPE OR PRINT NAME KAYE POLLOCK TELEPHONE NO. 688-2584

(This space for State Use)
ORIGINAL SIGNED BY JERRY SEXTON
DISTRICT I SUPERVISOR
APPROVED BY _____ TITLE _____ DATE JUN 18 1993
CONDITIONS OF APPROVAL, IF ANY:

RECEIVED

JUN 17 1993

JOHN HOBBS

1-11

BRIDGES STATE # 197
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO

RECOMMENDED WORKOVER PROCEDURE

1. MIRU PU. DIG PIT. FLOW WELL BACK TO PIT. ND WH. NU BOP.
2. POOH W/ RODS, 150 JTS 2-7/8" J-55 TBG AND TBG ANCHOR @ 4553'. RIH W/ CIBP AND WS TO 4500'. SET CIBP @ 4500'. LOAD HOLE W/ 9.5 PPG MUD. CAP CIBP W/ 35' CLASS C NEAT CMT.
3. PUH TO 2952'. SPOT 100' CLASS C NEAT CMT PLUG ACROSS YATES TOP @ 2902' FROM 2952-2852'.
4. PUH TO 1790'. SPOT 120' CLASS C NEAT CMT PLUG ACROSS 8-5/8" CSG SHOE @ 1725' AND SALT TOP @ 1739' FROM 1790-1670'.
5. PUH TO 30'. SPOT 30' CLASS C NEAT CMT PLUG FROM 30'-SURFACE. POOH W/ WS.
6. ND BOP. RD PU. DIG OUT CELLAR AND CUT CSG 3' BELOW SURFACE. WELD STEEL PLATE ON CSG STUB. ERECT P&A MARKER WITH WELL NAME AND PLUGGED DATE. FILL CELLAR AND CLEAN SURFACE LOCATION.

RECEIVED

JUN 17 1993

OBBS

12

BRIDGES STATE
WELL # 197
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
CURRENT COMPLETION

GL = 4014'
KB = 4027'

E, 24, 17-S, 34-E, 2630' FNL, 1310' FWL

35'

13-3/8" CSG

1725'

8-5/8" 24# K-55 ST&C CSG CMT'D W / 1400 SX CIRC.

PRODUCTION EQUIPMENT

152 JTS 2-7/8" J-55 TBG

TAC

2-3/8" SN

2-7/8" SN @ 4575'

2-7/8" PERF SUB

OPMA

4 - K-BARS, 110 - 3/4" RODS, 67 - 7/8" RODS

2-1/2" X 1-1/2" X 24' PUMP

SAN ANDRES PERFS 4536-4581'

5-1/2" 14# K-55 ST&C CSG CMT'D W / 1700 SX CIRC.


PBTD=4700'
TD=4800'

RECEIVED

JUN 12 1993

W. E. HOBBS
VICE


BRIDGES STATE
WELL # 197
VACUUM GRAYBURG (SAN ANDRES) FIELD
LEA COUNTY, NEW MEXICO
PROPOSED COMPLETION

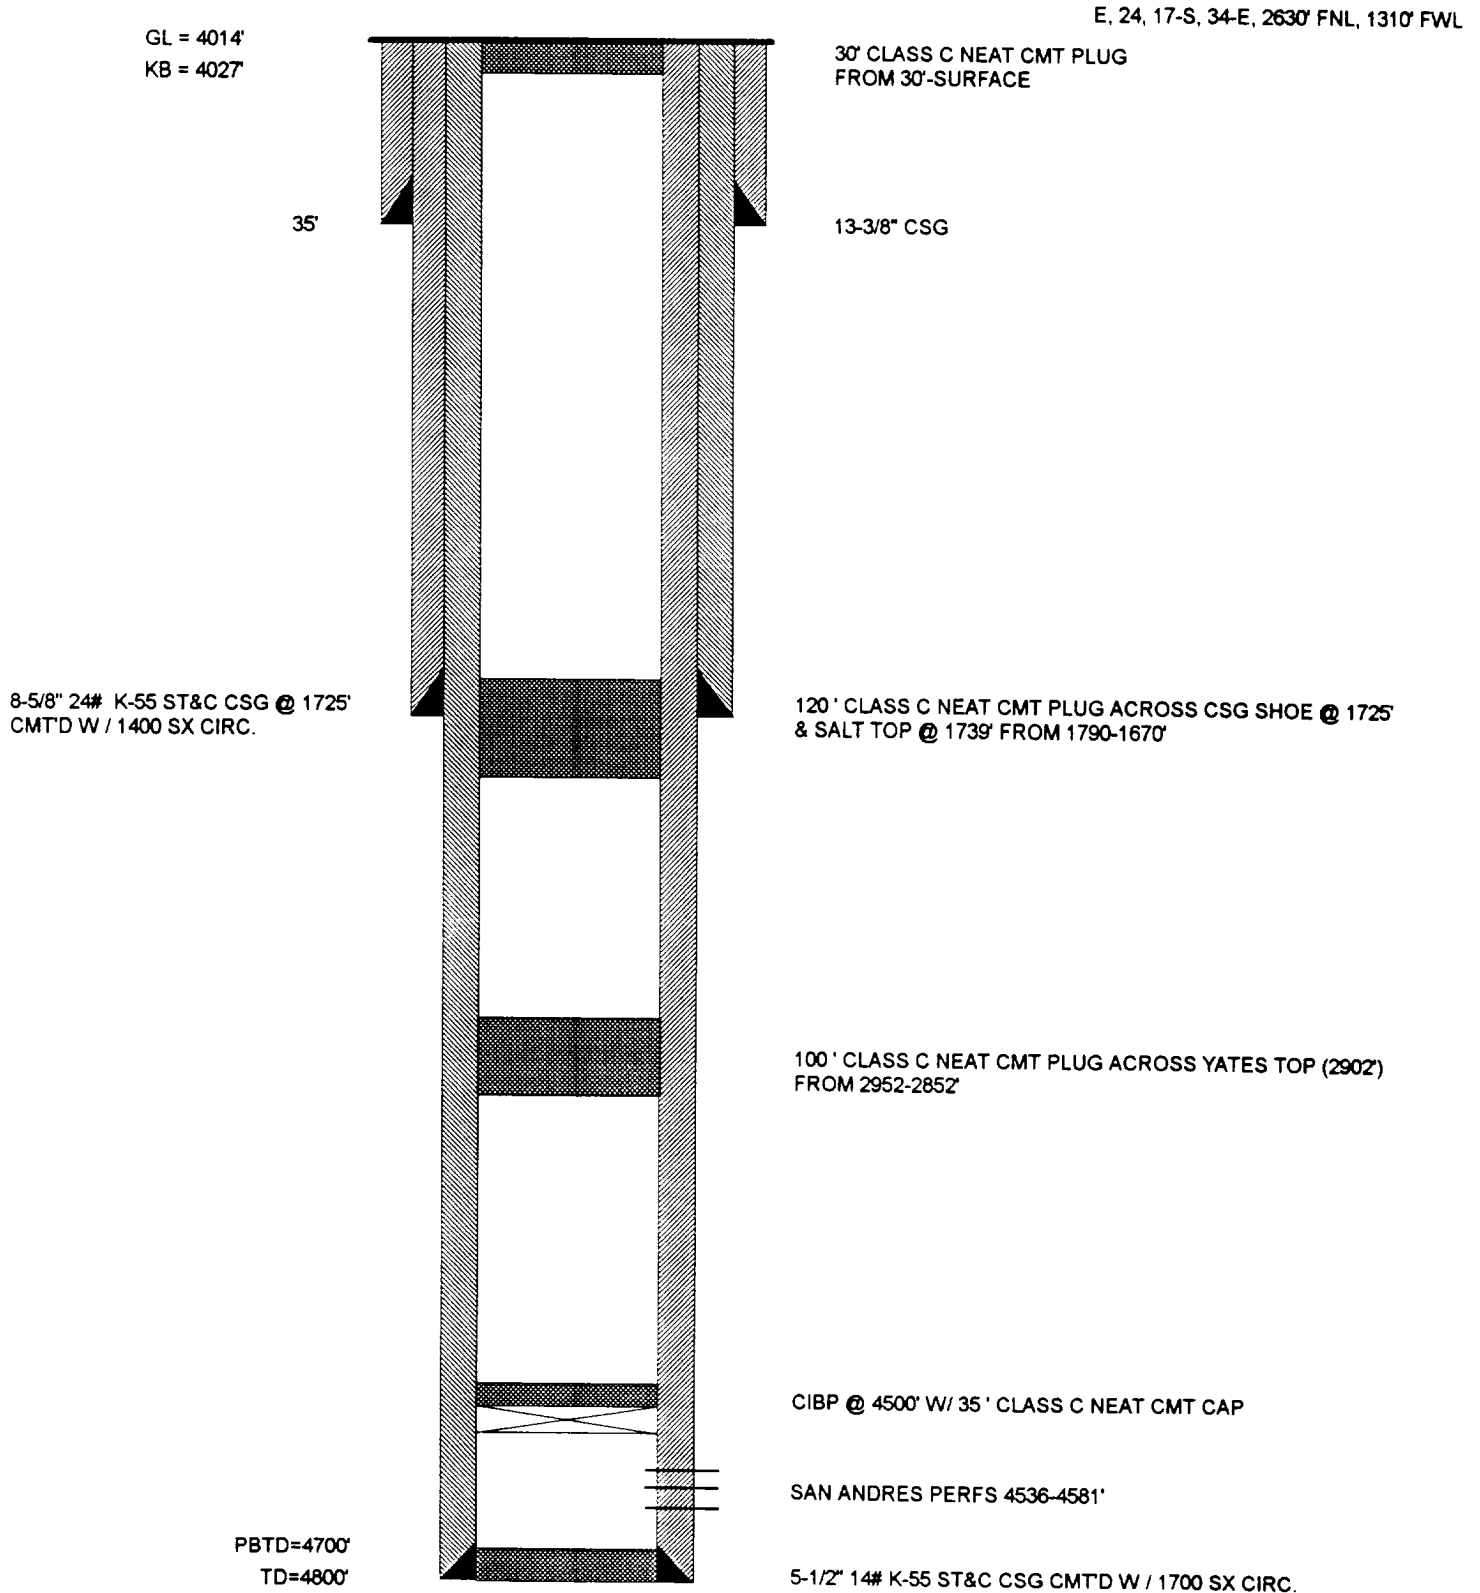

RECEIVED

JUN 17 1993

AND HOBBS
1000

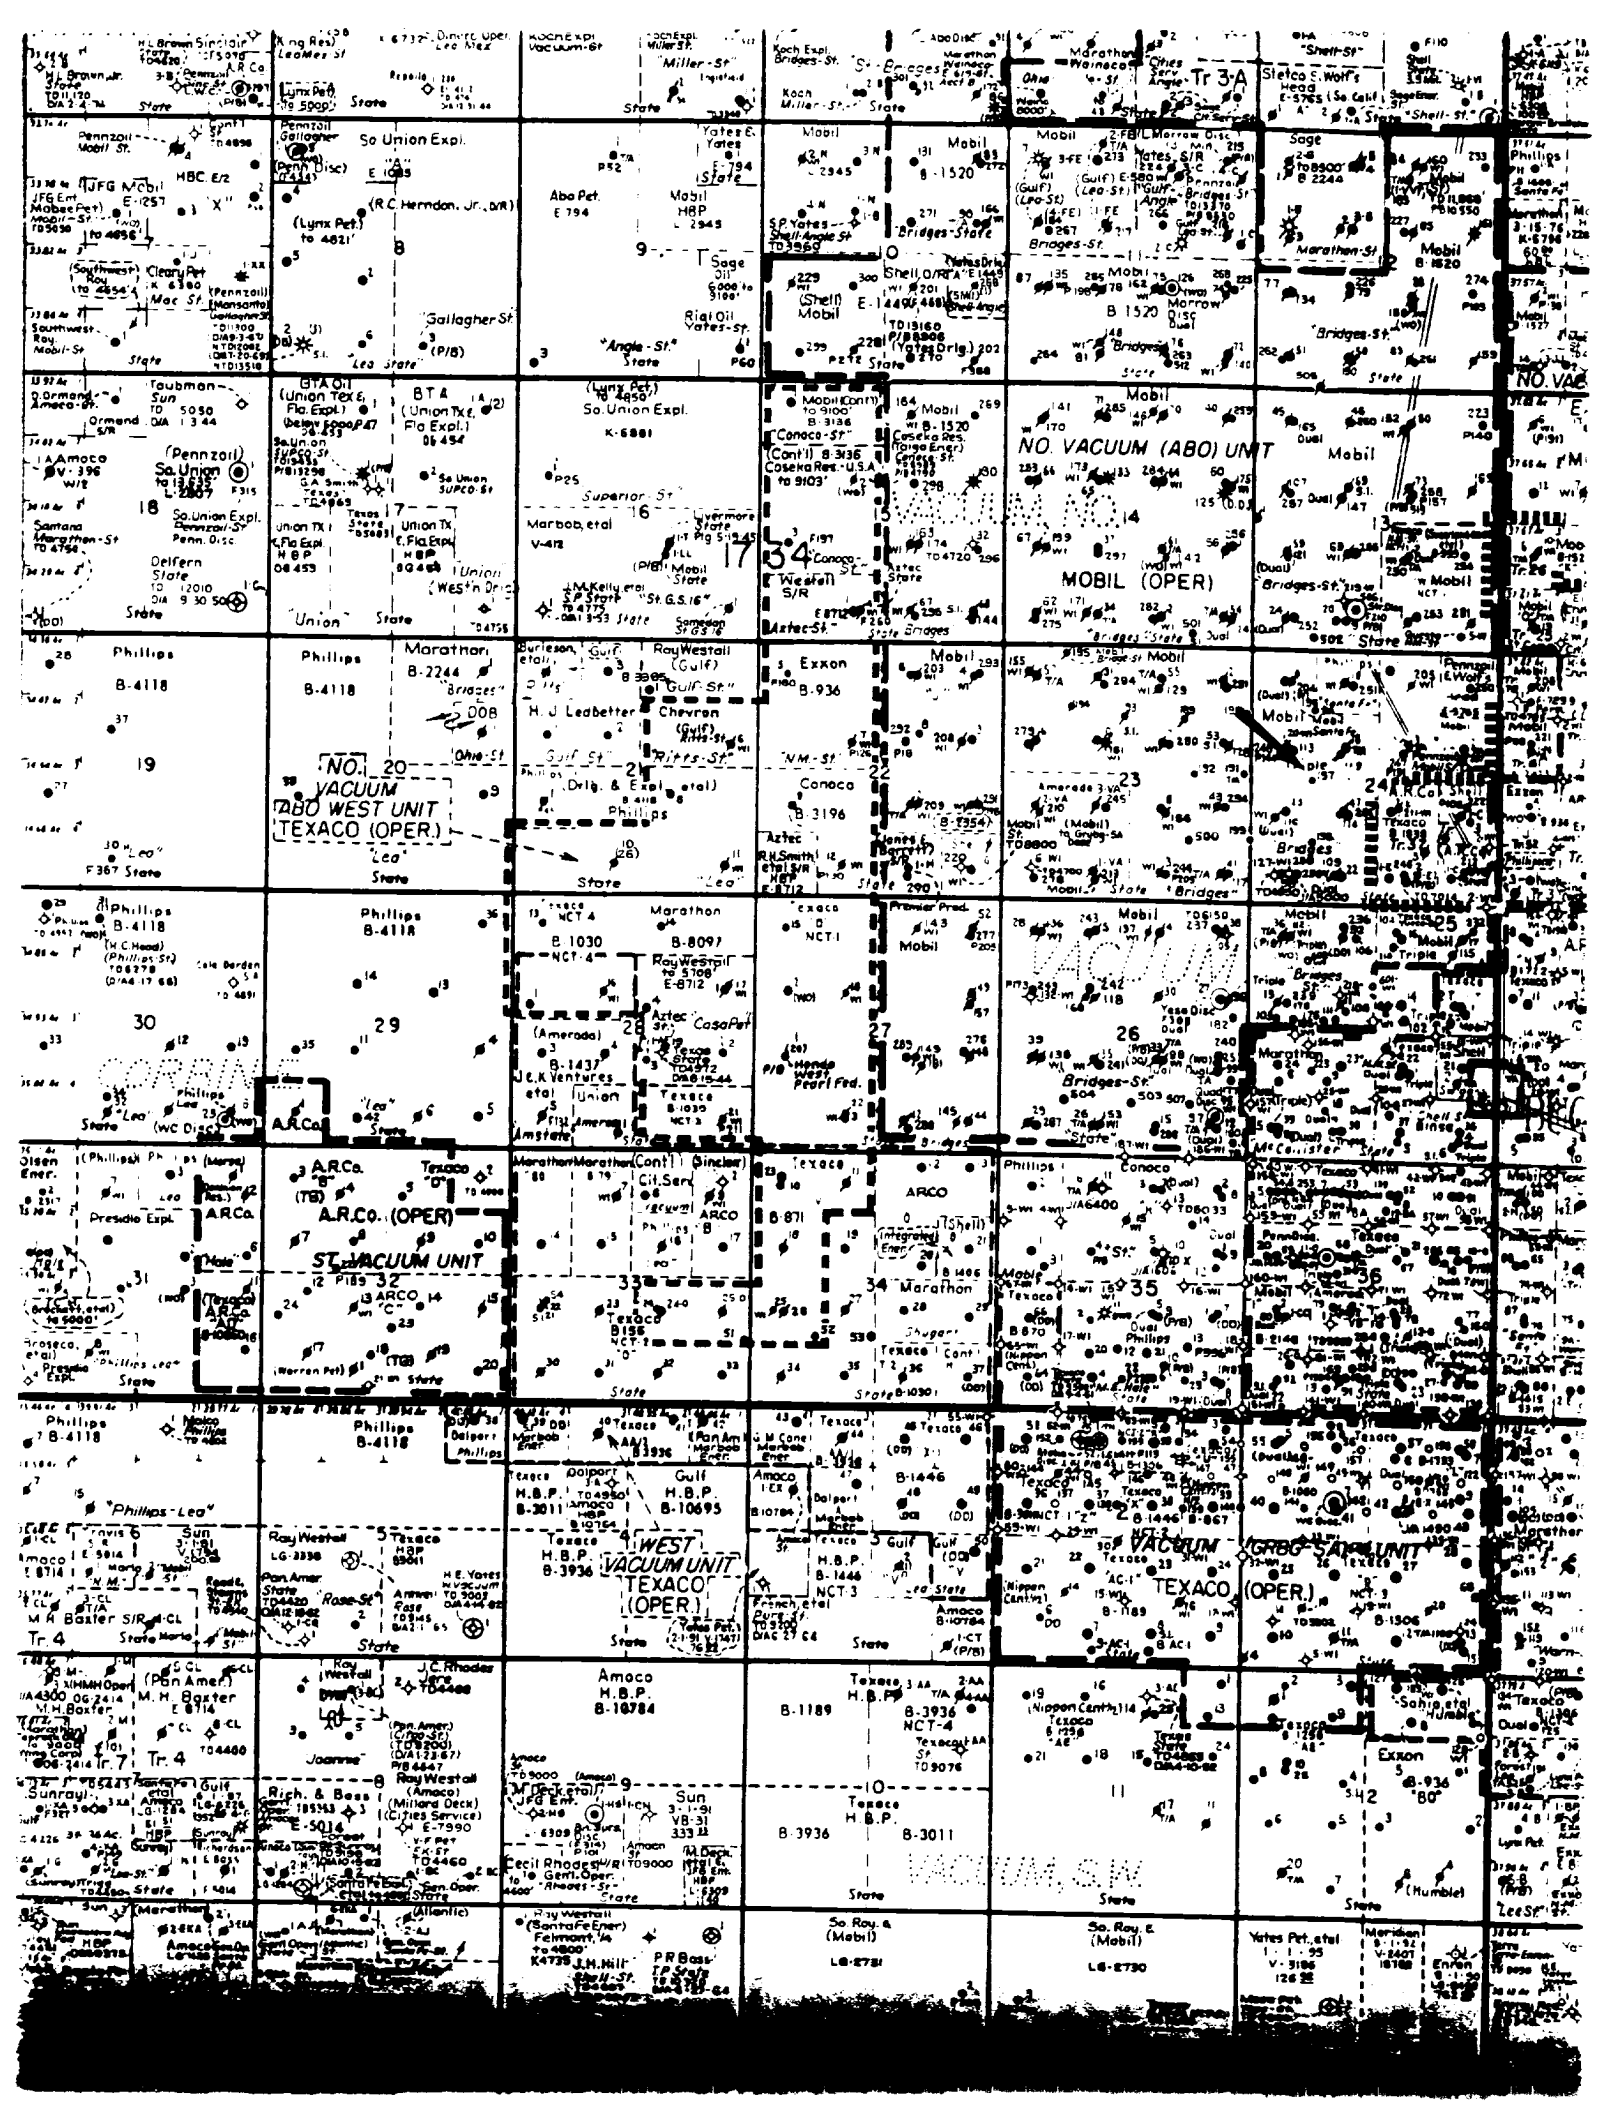

RECEIVED

JUN 17 1993

OD HOEBS
OFFICE