

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

M. Oil Cor. Division
625 N. French Dr.
Hobbs, NM 88240

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Matador Operating Company

3. Address and Telephone No.

8340 Meadow Rd., #158, Dallas, TX 75231 214-987-7144

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1330' FSL & 1980' FEL
Sec 28, T19S, R33E

5. Lease Designation and Serial No.

NM 94618

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Topacio Federal 28 Com #2

9. API Well No.

30-025-34830

10. Field and Pool, or Exploratory Area

Gem Morrow Gas

11. County or Parish, State

Lea, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 17-1/2" hole 12/23/99. Drilled to 1210'. Ran 27 jts 13-3/8" 48# J-55 csg.
Casing set @ 1210'. Dowell cemented w/ lead: 730 sxs 35/65 POZ, Class "C" w/
10% salt, 6% gel, .25 PPS Celloflake, .2% Anti-foamer mixed @ 12.4 ppg, 2.26
yld, 12.58 GPS wtr. Tail: Class "C" w/ 2% Cacl, mixed @ 14.8 ppg, yld 1.34,
6.3 GPS wtr. Displace w/ 183 bbls FW. Bump plug. Float held. Circ 60 bbls
149 sxs to reserve. Witnessed by Andy Cortez w/ BLM. WOC. Cut off
conductor & csg. Weld on head & test weld to 500#. NU BOP's & choke to 1200 psi.

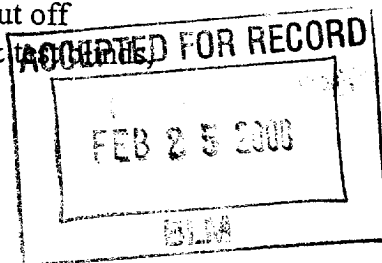

14. I hereby certify that the foregoing is true and correct

Signed J. H. Bell

Title Drilling Manager

Date 2-18-00

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

Date _____

GW

BUREAU OF LAND MGMT.
ROSWELL OFFICE

2000 FEB 22 A 9 42

RECEIVED

RECEIVED
FEB 22 2000
BUREAU OF LAND MGMT.
ROSWELL OFFICE