


## OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## MISCELLANEOUS REPORTS ON WELLS

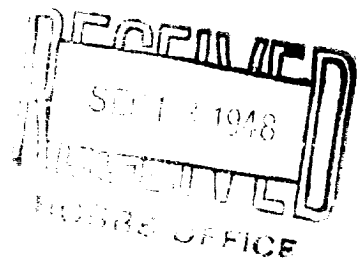

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

September 10, 1948

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,  
SANTA FE, NEW MEXICO  
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the  
Amerada Petroleum Corporation State S Well No. 2 in the  
Company or Operator SW $\frac{1}{4}$  SW $\frac{1}{4}$  of Sec. 2, T. 20S, R. 36E, N. M. P. M.,  
Monument Field, Lea County.

The dates of this work were as follows: September 4-10, 1948

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on September Aug. 27, 1948  
and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

## DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3907' Plugged Back Depth. Swabbed 4 $\frac{1}{2}$  hrs. and well kicked off first on 32/64" and then 20/64" choke. In 21 $\frac{1}{2}$  hrs. to 6:00AM, 9-5-48 well flowed 54.66 bbls. oil and 474.50 bbls. water, GOR 16929. In next 24 hrs. flowed 25.12 bbls. oil and 64.58 bbls. water, GOR 18392. Killed well and tried to set formation but plastic plug soft. Ran bit and washed out soft plastic to 3918'. Tried to set 2-5 $\frac{1}{2}$ " formation packers at 3775' but would not hold. Ran 5 $\frac{1}{2}$ " but hit bridge at 2067'. Cleaned out to bottom ~~box~~ with 5 $\frac{1}{2}$ " bit and ran Halliburton Calipers. Found 8" hole 3736'-3822'; gradual reduction to 5-5/8" hole 3822'-26'; 5 $\frac{1}{2}$ " hole 3826'-3918'. Set Murphy Plug at 3820', dumped 98 gals. gravel, 40 gals. Ottawa Sand with 10 gal. Plastic cap at 3771'. Squeezed with 125 gals. plastic, 1300# dropped to 800# and held for 5 minutes, 70 gal. penetration, top plastic @ 3741' at 7AM, 9-10-48.

Witnessed by C. E. Telge Name Amerada Pet. Corp. Company Farm Boss Title 7AM, 9-10-48.

Subscribed and sworn before me this \_\_\_\_\_

I hereby swear or affirm that the information given above is true and correct.

10th. day of September 19 48

Name Ray Tepper

Position Asst. Dist. Supt.

Willie Marie Taylor  
Notary Public

Representing Amerada Petroleum Corporation  
Company or Operator

My commission expires \_\_\_\_\_

Address Drawer D, Monument, New Mexico

Remarks:

APPROVED

Name Ray Tepper

Title \_\_\_\_\_

SEP 13 1948