

NEW MEXICO OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

MISCELLANEOUS NOTICES

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before the work specified is to begin. A copy will be returned to the sender on which will be given the approval, with ~~for conservation recommended~~ advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF	<input checked="" type="checkbox"/>	NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL
NOTICE OF INTENTION TO CHANGE PLANS	<input type="checkbox"/>	NOTICE OF INTENTION TO PULL OR OTHERWISE ALTER CASING
NOTICE OF INTENTION TO REPAIR WELL	<input type="checkbox"/>	NOTICE OF INTENTION TO PLUG WELL
NOTICE OF INTENTION TO DEEPEN WELL	<input type="checkbox"/>	

Monument, New Mexico

May 26, 1952

Place

Date

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the.....

Amerada Petroleum Corporation **Fred Turner Jr "A"** Well No. **7** in **SE/4, NE/4**
 Company or Operator Lease
 of Sec. **18** T. **20-S** R. **38-E** N. M. P. M. **North Warren-McKee** Field.
Lea County.

FULL DETAILS OF PROPOSED PLAN OF WORK

FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION

9475' - Total Depth - Lime. Finished drilling 7-3/8" hole at 1:15 PM, 5/23/52. Ran Drill Stem Test from 9375' to 9475'. Ran Schlumberger Electrical, Gamma Ray and Microlog Surveys. Ran 275 Jts of 5 1/2" casing set at 9368' with 600 Sx Slo-Set Cement mixed 3 1/2 Jel and 1/4# Flocele per sack. Plug pumped to 9277'. Max pressure 2300#. Plug down @ 8:30 PM, 5/25/52. Ran 6 B&W Centralizers spaced 30' apart from 9358' to 9208' and 12 weatherford scratchers spaced 15' apart in the same section. Will W.O.C. for 24 hours at test for casing shut-off.


Approved..... MAY 26 1952
 except at follows: 18.....

Amerada Petroleum Corporation

Company or Operator

By *AW Turner*
 Position **Assistant District Superintendent**
 Send communications regarding well to
 Name **Amerada Petroleum Corporation**
 Address **Drawer D, Monument, New Mexico**

OIL CONSERVATION COMMISSION,
 By *May Graham*
 Title **Oil & Gas Inspector**

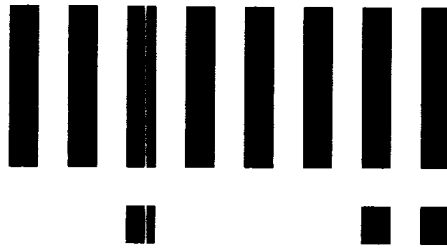

LTR



Job separation sheet

NEW MEXICO OIL CONSERVATION COMMISSION

MISCELLANEOUS REPORTS ON WELLS

Submit this report in triplicate to the Oil Conservation Commission District Office within ten days after the work specified is completed. It should be signed and filed as a report on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

April 7, 1952

Date

Monument, New Mexico

Place

Following is a report on the work done and the results obtained under the heading noted above at the.....

Amerada Petroleum Corporation Fred Turner Jr "A" Well No. 7 in the
 Company or Operator Lease
 SE/4, NE/4 of Sec. 18 T. 20-S R. 38-E, N. M. P. M.,
 Undesignated Pool Lea County.

The dates of this work were as follows: April 6, 1952

Notice of intention to do the work was ~~not~~ submitted on Form C-102 on April 5, 1952, 19.....
 and approval of the proposed plan was ~~not~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

3705' - Total Depth - Lime. Ran temperature Survey - top of cement outside 8-5/8" casing at 1192' - 42.7% fill. Checked top of cement inside casing at 3643 and tested casing for 1/2 hour with 800#. - no pressure drop. Drilled cement from 3643' to 3705' and tested 8-5/8" casing for 1/2 hour with 800#. - no pressure drop. Started drilling formation and 7-3/8" hole at 3:30 AM, 4/6/52.

Witnessed by T. M. Mackey Amerada Petroleum Corporation Farm Boss -
 Name Company Title

APPROVED:
 OIL CONSERVATION COMMISSION

Name
 Title

Date

I hereby swear or affirm that the information given above is true and correct.

Name *[Signature]*
 Position Assistant District Superintendent
 Representing Amerada Petroleum Corporation
 Company or Operator
 Address Drawer D, Monument, New Mexico