


DUPLICATE

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Budget Bureau 42-R358.2
Approval expires 12-31-32.

Land Office Las Cruces
Lease No. 030132
Unit Closson-A

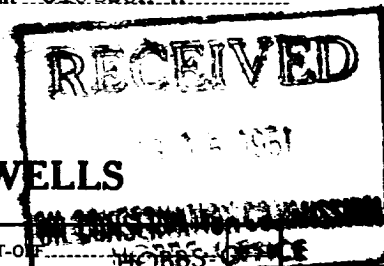

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	<input checked="" type="checkbox"/>	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Hobbs, New Mexico January 3, 1940

Well No. A-5 is located 1980 ft. from [N] line and 1980 ft. from [E] line of sec. 18

S.18 Sec. 18 22-S 36-E NMPM
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
South Eunice Lea New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is ? ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

PROPOSED CASING PROGRAM

Size	Weight	Proposed Amount	Casing Program
10 3/4"	32.75#	200'	To be cemented back to surface
8 1/4"	24#	3000'	To be cemented back to top of salt (150% of calculated amt)
5 1/2"	17#	3700'	To be cemented back with approximately 150 sax of 150% of the calculated amount to bring the cement to the bottom of the 8 1/4" string.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Cities Service Oil Company

Address Hobbs, New Mexico

By /s/ D. D. Rodie

Title Division Superintendent