


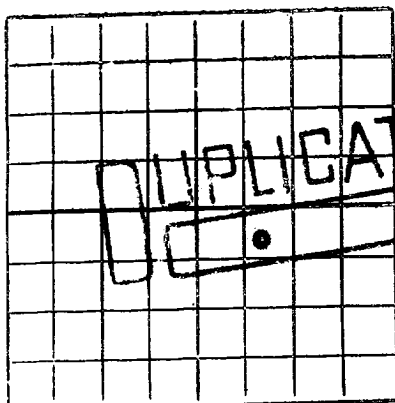

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico OFFICE OCC

1955 AUG 17 AM 11:10
WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

AREA 640 ACRES
LOCATE WELL CORRECTLY

John M. Kelly

Amerada State

(Company or Operator)

(Lease)

Well No. 1, in NW 1/4 of SE 1/4, of Sec. 24, T. 21S, R. 35E, NMPM.

Eumont

Pool,

Lee

County.

Well is 1800 feet from East line and 2310 feet from South line

of Section 24. If State Land the Oil and Gas Lease No. is E-392

Drilling Commenced July 17, 1955. Drilling was Completed August 1, 1955.

Name of Drilling Contractor Gaskle Drilling Company

Address Hobbs, New Mexico

Elevation above sea level at Top of Tubing Head 3637 DF. The information given is to be kept confidential until

Not confidential, 19

OIL SANDS OR ZONES

No. 1, from 3850 to 3890 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8	24	New	312	Tex. Pat.			
5-1/2	15.5	New	4000	Float		3938-3966-Plugged off.	
						3856-64; 3880-90	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8-5/8	312	175	HOWCO Plug		
7-7/8	5-1/2	4000	175	HOWCO Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Perfs. 3938-66 treated w/8000 gals. / 8000# Control Frac. Produced water. Bridge Plug set at 3920 capped w/ cement to 3909.

Perfs. 3856-3864; 3880-3890 treated w/10,000 gals. / 10,000# Control Frac.

Result of Production Stimulation Produced 60 BOPD / 14 BWPD on 16/64" choke

FTP-120 #CP-400

Depth Cleaned Out

CORD OF DRILL-STEM AND SPECIAL TI

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4000 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 8-5-55, 19

OIL WELL: The production during the first 24 hours was 74 barrels of liquid of which 80 % was
was oil; 0 % was emulsion; 20 % water; and 0 % was sediment. A.P.I.
Gravity 35° API

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy. 1670	T. Devonian	T. Ojo Alamo
T. Salt. 1860	T. Silurian	T. Kirtland-Fruitland
B. Salt. 3395	T. Montoya	T. Farmington
T. Yates. 3443 (194)	T. Simpson	T. Pictured Cliffs
T. 7 Rivers 3715 (-78)	T. McKee	T. Menefee
T. Queen	T. Ellenburger	T. Point Lookout
T. Grayburg	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn.
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn.	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1670	1670	Caliche, Surface Sands Red beds.				
1670	1860	190	Anhydrite				
1860	3395	1535	Salt w/Anhydrite stringers.				
3395	3500	105	Anhydrite, dolomite.				
3500	4000	500	Anhydrite, Sandy dolomites, sand stringers				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

July 17, 1956

(Date)

Company or Operator John M. Kelly

Address Box 5671, Roswell, New Mexico

Name Kenneth D. McFarlane

Position or Title Production Superintendent