

Submit 3 Copies
to Appropriate
District Office

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I
P.O. Box 1980, Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION
310 Old Santa Fe Trail, Room 206
Santa Fe, New Mexico 87503

WELL API NO.
30-025-09217-00-00

5. Indicate Type of Lease
STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
B-1167

7. Lease Name or Unit Agreement Name
State JG

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT"
(FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well
OIL ☒ GAS ☐
WELL ☒ WELL ☐ OTHER ☐

2. Name of Operator
John H. Hendrix Corporation

3. Well No. 2

3. Address of Operator
PO Box 3040; Midland, Texas 79702-3040

9. Pool name or Wildcat
Langlie Mattix

4. Well Location
Unit Letter J 1650 Feet From The East Line and 2310 Feet From The South Line

Section 2 Township 23S Range 36E NMPM Lea County
10. Elevation (Show whether DF, RKB, RT, GR, etc.)

11 Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data
NOTICE OF INTENTION TO: SUBSEQUENT REPORT OF

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ REMEDIAL WORK ☐ ALTERING CASING ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ COMMENCE DRILLING OPNS ☐ PLUG AND ABANDONMENT ☐
PULL OR ALTER CASING ☐ CASING TEST AND CEMENT JOB ☐
OTHER ☐ OTHER ☐

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work, SEE RULE 1103.

1. Rig up P&A equipment. Dig and line work pit. NU BOP.
2. Set CIBP at 3525'.
3. Circulate hole w/ 9.5# mud
4. Cap CIBP w/ 20 sx. cement.
5. Spot 20 sx cement from 3100'-3000'.
6. Perforate at 2724'. Squeeze w/ 55 sx. cement. Displace TOC to 2624' (base of salt). Tag
7. Perforate at 1300'. Squeeze w/ 55 sx. cement. Displace TOC to 1200' (Top of salt). Tag
8. Perforate at 300'. Squeeze w/ 100 sx. cement. Displace TOC to 200'. Tag
9. Cut off wellhead. Spot 10 sx. surface plug.
10. Install P&A marker

THIS NOTICE MUST BE NOTICED 24
HOURS BEFORE THE BEGINNING OF
PLUG AND ABANDONMENT TO C-103
TO BE APPROVED.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE H. Boatright TITLE Agent DATE 11/14/02

TYPE OR PRINT NAME H. Boatright

TELEPHONE NO. 915 570 5282

(This space for State Use)

APPROVED BY _____ TITLE _____ DATE _____


CONDITIONS OF APPROVAL, IF ANY:

NOV 18 2002

WELL NAME AND NUMBER

State JG #2

John μ Hendrix Corporation
Lea County, New Mexico
After Plug and Abandonment
State Lease No. B-1167

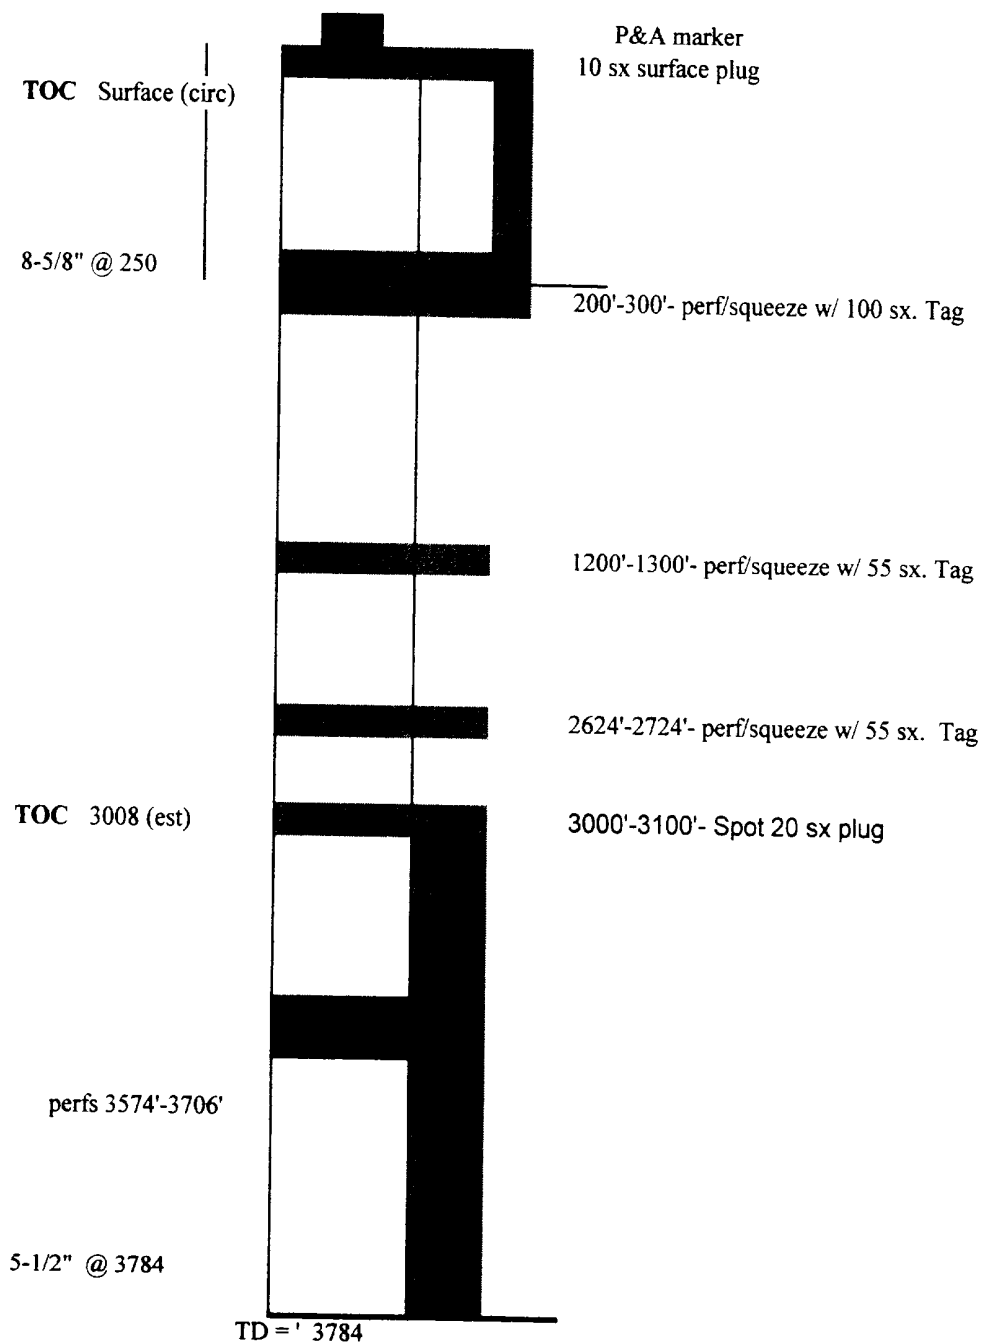


WELL NAME AND NUMBER

State JG #2

John W Hendrix Corporation
Lea County, New Mexico

State Lease No. B-1167

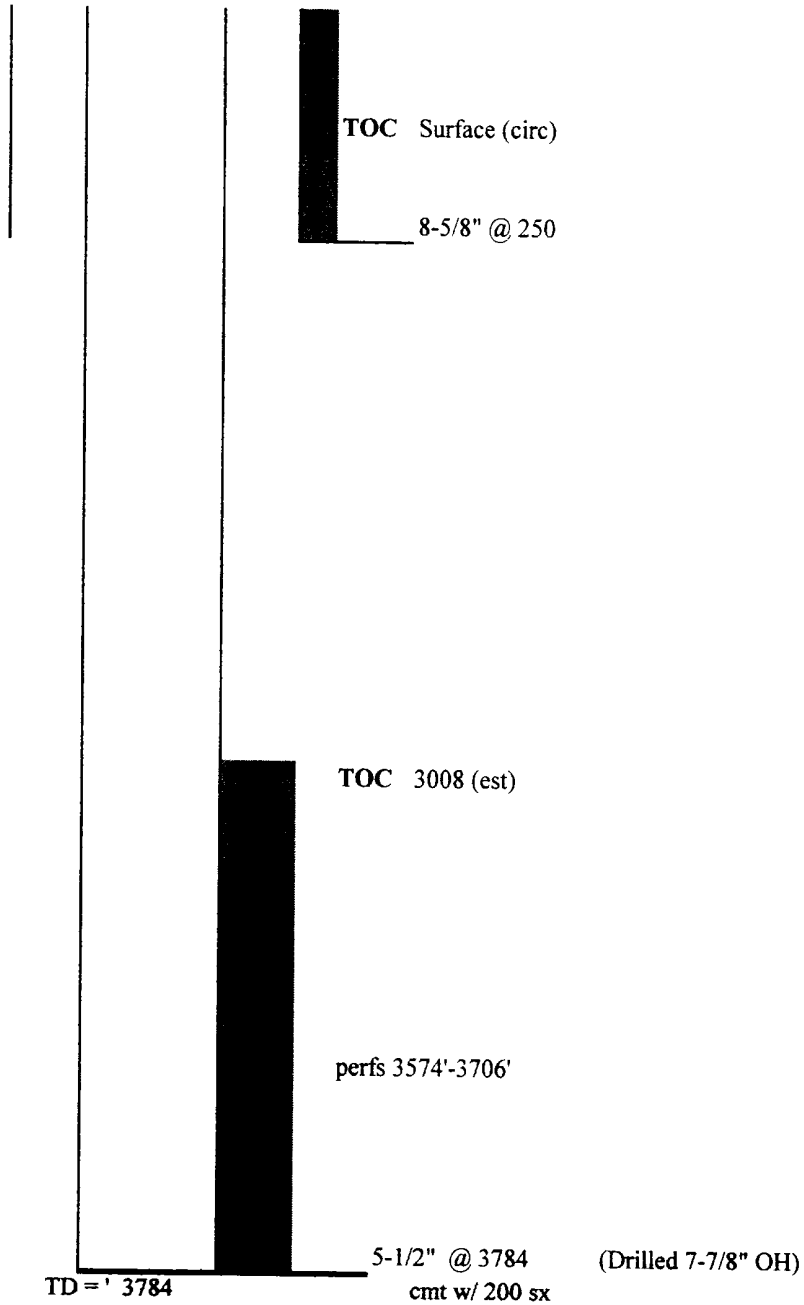

RECORD OF DRILL-STEM AND SPECIAL : NS

State 56 # 2

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3795 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing September 3, 1959

OIL WELL: The production during the first 24 hours was 244 barrels of liquid of which 97 % was

was oil; % was emulsion; 3 % water; and % was sediment. A.P.I.

Gravity: 36.6 deg.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in:

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy	1300	T. Devonian	T. Ojo Alamo
T. Salt	2724	T. Silurian	T. Kirtland-Fruitland
B. Salt	3033' (+423')	T. Montoya	T. Farmington
T. Yates	3257' (+299')	T. Simpson	T. Pictured Cliffs
T. 7 Rivers	3618' (+162')	T. McKee	T. Menefee
T. Queen		T. Ellenburger	T. Point Lookout
Graburg		T. Gr. Wash	T. Mancos
T. San Andres		T. Granite	T. Dakota
T. Glorieta		T. Glatfelter 1320' (+2128')	T. Morrison
T. Drinkard		T.	T. Penn
T. Tubbs		T.	T.
T. Abo		T.	T.
T. Penn		T.	T.
T. Miss		T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	200	200	Surface Sand, Caliche, bed rocks				
200	2000	2800	Surface Sand, Caliche, bed rocks				
2000	2000	2800	Surface Sand, Caliche, bed rocks				