


N.

(Revised 7/1/52)
(Form C-105)

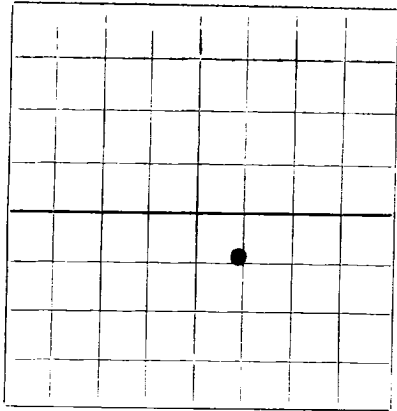

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

DALPORT OIL CORPORATION

(Company or Operator)

WINTERS "C"

(Lease)

Well No. **1**, in **NW** $\frac{1}{4}$ of **SE** $\frac{1}{4}$, of Sec. **7**, T. **25S**, R. **37E**, NMPM.

Langlie-Mattix

Pool,

Lee

County.

Well is **1980** feet from **South** line and **1980** feet from **East** line of Section **7**. If State Land the Oil and Gas Lease No. is

Drilling Commenced **3-12**, 19 **53**. Drilling was Completed **3-29**, 19 **53**.

Name of Drilling Contractor **Permian Drilling Company, Odessa, Texas**

Address

Elevation above sea level at Top of Tubing Head **3132**
4-6, 19 **53**. The information given is to be kept confidential until

OIL SANDS OR ZONES

No. 1, from **3254** to **3258** No. 4, from to
No. 2, from **3280** to **3284** No. 5, from to
No. 3, from **3298** to **3310** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **None** to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10 3/4"	32.75	New	301	Guide	-	-	Surface
7"	23#	"	3200	Float			Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/4	10 3/4	301	200	Halliburton		
8 3/4	7"	3200	400-	"		
			2 Staged			

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

2000 Gallons - Western Fracture gel - Open hole 3200 to 3345

Result of Production Stimulation **Production 72 B. O. P. D.**

Depth Cleaned Out **3345**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3345 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 3-29, 1953

OIL WELL: The production during the first 24 hours was 72 barrels of liquid of which 99% was oil; 1% was emulsion; 0% water; and% was sediment. A.P.I. Gravity 34

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy.	1120	T. Devonian	
T. Salt	1220	T. Silurian	
B. Salt	2645	T. Montoya	
T. Yates	2795	T. Simpson	
T. 7 Rivers	3000	T. McKee	
T. Queen	3210	T. Ellenburger	
T. Grayburg		T. Gr. Wash.	
T. San Andres		T. Granite	
T. Glorieta		T.	
T. Drinkard		T.	
T. Tubbs		T.	
T. Abo		T.	
T. Penn.		T.	
T. Miss.		T.	
		T. Ojo Alamo	
		T. Kirtland-Fruitland	
		T. Farmington	
		T. Pictured Cliffs	
		T. Menefee	
		T. Point Lookout	
		T. Mancos	
		T. Dakota	
		T. Morrison	
		T. Penn.	
		T.	
		T.	
		T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	325	325	Surface Rocks				
325	830	505	Red bed				
830	1120	290	Red bed, sand and shale				
1120	1220	100	Anhydrite				
1220	2645	1425	Salt and anhydrite				
2645	2795	150	Anhydrite and lime				
2795	3210	415	Lime				
3210	3345	135	Lime and sand				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

April 6, 1953

(Date)

Company or Operator DALPORT OIL CORPORATION

Address 930 Fidelity Union Life Bldg. Dallas, Texas

Name W. F. Turner

Position or Title Vice-President