

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE
(Other instructions
verse side)

Form approved.
Budget Bureau No. 42 R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC-032650 (b)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR GETTY OIL COMPANY	8. FARM OR LEASE NAME JUSTIS MC KEE UNIT
3. ADDRESS OF OPERATOR P.O. BOX 249, HOBBS, NEW MEXICO 88240	9. WELL NO. 117
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 960' FEL & 2280' FML, Section 24, T-25-S, R-37-E	10. FIELD AND POOL, OR WILDCAT JUSTIS MC KEE
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3082' D.F.
	12. COUNTY OR PARISH LEA
	13. STATE NEW MEXICO

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐
REPAIR WELL ☐	CHANGE PLANS ☐
(Other) ☐	

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☒
(Other) ☐	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The Mc Kee Zone of this well squeezed off as follows: (Dual Well - A. B. Coates "C" No. 17 Ellenburger and Justis Mc Kee Unit No. 117). Set CIEP @ 7400, tested with 3000#, OK. Spotted 12 ft. sand on top of BP. Set JPTS @ 7141'. Squeezed Mc Kee perfs. 7304-20' with 100 sacks Class "C" with 5% CF-KZ 7 3# Salt per sack. Maximum pressure 3200#. Drilled cement and cleaned out to 7377', tested to 1000# for 30 minutes, OK. Drilled and washed to BP @ 7396'. Retrieved BP. Pushed Baker Model "D" Packer to bottom. Tagged T.D. @ 7841'. PBTD was at 7844'. Set 2-3/8" tubing @ 6032' with Baker Model B tubing anchor catcher with 7000# tension on tubing string. Ran rods and put Ellenburger back on pump.

18. I hereby certify that the foregoing is true and correct


ORIGINAL SIGNED BY
SIGNED **EUGENE J. MILLER**
Eugene J. Miller
(This space for Federal or State office use)

TITLE **AREA ENGINEER**

DATE **October 26, 1971**

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

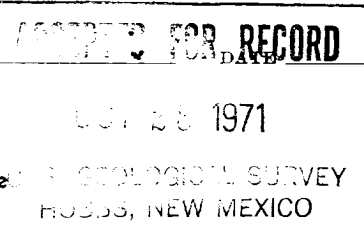

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1963 O-685229

847 - 485

RECEIVED

21971

OIL CONSERVATION COMM.
HEDGES, T. L.