

Submit 3 Copies To Appropriate District Office

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999


SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-12346
1. Type of Well: Oil Well ☐ Gas Well ☐ Other Injector ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Chevron USA, INC.		6. State Oil & Gas Lease No.
3. Address of Operator 15 Smith Rd. Midland, Tx 79705		7. Lease Name or Unit Agreement Name: West Dollarhide Drinkard Unit
4. Well Location Unit Letter <u>L</u> : 1980 feet from the <u>south</u> line and <u>660</u> feet from the <u>west</u> line Section <u>33</u> Township <u>24-S</u> Range <u>38-E</u> NMPM County <u>Lea</u>		8. Well No. 59
10. Elevation (Show whether DR, RKB, RT, GR, etc.)		9. Pool name or Wildcat Dollarhide, Tubb, Drinkard

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐ OTHER: ☐	SUBSEQUENT REPORT OF: REMEDIAL WORK ☐ ALTERING CASING ☐ COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐ CASING TEST AND CEMENT JOB ☐ OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify OCD 24hrs prior to MI & RU.
2. Set 5 1/2 CIBP @ 6350 spot 25sx plug 6350-6150(Drinkard) WOC Tag.
3. Displace hole w/MLF 9.5# Brine w/25 # Gel P/BBL.
4. Spot 25sx plug 3600-3400(Queen)
5. Spot 25sx plug 2600-2400(B-salt, Yates) WOC Tag.
6. Spot 25sx plug 1200-1000(T-salt)WOC Tag.
7. Perf 4 holes @ 350 sqz 80sx plug 350-surf, 5 1/2 X 8 5/8 csgs(8 5/8 shoe, surf) WOC Tag
8. Install dry hole marker.

THIS COMPLETION NOTICE IS FILED FOR THE RECORD OF THE OIL CONSERVATION DIVISION, STATE OF NEW MEXICO, ON NOV 21 1999.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE

AES STAFF

DATE

11/19/02

Type or print name

RANDAL C. PAPASAN

Telephone No.

(915) 687-7108

(This space for State use)

APPROVED BY

TITLE


DATE

Conditions of approval, if any:

PLUGGING & ABANDONMENT WORKSHEET

OPERATOR CHEVRON USA INC.
 LEASE NAME WEST DOLLARIDE DRINKARD UNIT
 WELL # 59

SECT 33 TWN 24-S RNG 38-E
 FROM 1980 NSL 660 EWL
 TD 6870 FORMATION @ TD DRINKARD
 PBTD FORMATION @ PBTD

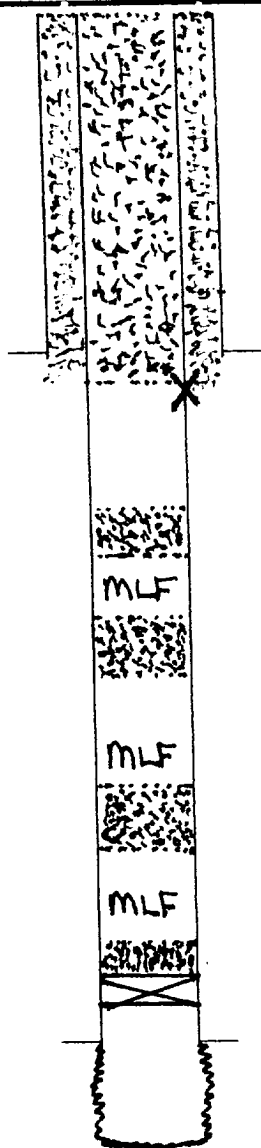

8 5/8
 @ 300
 TOC SURF

5 1/2
 @ 6400
 TOC 300

TD 6870

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	8 5/8	300	SURF	Circ
INTMED 1				
INTMED 2				
PROD	5 1/2	6400	300	CALC

	SIZE	TOP	BOT	TOC	DETERMINED BY
LINER 1					
LINER 2					

	CUT & PULL		TOP - BOTTOM
INTMED 1		PERFS	6490 - 6860
INTMED 2		OPENHOLE	
PROD			

*REQUIRED PLUGS DISTRICT

	PLUG	TYPE PLUG	SACKS CEMENT	DEPTH
RUSTLER (ANHYD)	1	CIBP	25	6350
YATES	2	QUEEN	25	3600
QUEEN	3	B-SALT	25	2600
GRAYBURG	4	T-SALT	25	1200
SAN ANDRES	5	8 3/8 S	80	350
CAPITAN REEF				
DELAWARE				
BELL CANYON				
CHERRY CANYON				
BRUSHY CANYON				
BONE SPRING				
GLORIETA				
BLINBRY				
TUBB				
DRINKARD				
ABO				
WC				
PENN				
STRAWN				
ATOKA				
MORROW				
MISS				
DEVONIAN				