

EC

OCD-ARTESIA

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No. 1004-0136
Expires November 30, 2000

0341

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		CONFIDENTIAL		5. Lease Serial No. NMLC068430
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone				6. If Indian, Allottee or Tribe Name
2. Name of Operator BASS ENTERPRISES PRODUCTION CO		Contact: TAMI WILBER E-Mail: twilber@basspet.com		7. If Unit or CA Agreement, Name and No. NMNM71016X
3a. Address P O BOX 2760 MIDLAND, TX 79702		3b. Phone No. (include area code) Ph: 432.683.2277 Fx: 432.687.0329		8. Lease Name and Well No. POKER LAKE UNIT 188
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface NENW 660FNL 1880FWL At proposed prod. zone NENW 660FNL 1880FWL		SECRETARY'S POTASH		9. API Well No. 30-015-33360
14. Distance in miles and direction from nearest town or post office* 14 MILES EAST FROM MALAGA, NEW MEXICO		RECEIVED		10. Field and Pool, or Exploratory NASH DRAW-DELAWARE
15. Distance from proposed location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660		16. No. of Acres in Lease 2479.76		11. Sec., T., R., M., or Blk. and Survey or Area Sec 5 T24S R30E Mer NMP
18. Distance from proposed location to nearest well, drilling, completed, applied for, on this lease, ft. 1220		19. Proposed Depth 7680 MD		12. County or Parish EDDY
21. Elevations (Show whether DF, KB, RT, GL, etc.) 3256 GL		22. Approximate date work will start 03/01/2004		13. State NM
23. Estimated duration 12 DAYS		24. Attachments CARLSBAD CONTROLLED WATER BASIN		17. Spacing Unit dedicated to this well 40.00
20. BLM/BIA Bond No. on file				
The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:				
1. Well plat certified by a registered surveyor.		4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).		
2. A Drilling Plan.		5. Operator certification		
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).		6. Such other site specific information and/or plans as may be required by the authorized officer.		
25. Signature (Electronic Submission)		Name (Printed/Typed) TAMI WILBER		Date 01/22/2004
Title AUTHORIZED REPRESENTATIVE				
Approved by (Signature) /s/ Linda S. C. Rundell		Name (Printed/Typed) /s/ Linda S. C. Rundell		Date MAR 25 2004
Title STATE DIRECTOR		Office NM STATE OFFICE		
Application approval does not warrant or certify the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. Conditions of approval, if any, are attached.				
APPROVAL FOR 1 YEAR				
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.				

Additional Operator Remarks (see next page)

Electronic Submission #27077 verified by the BLM Well Information System
For BASS ENTERPRISES PRODUCTION CO, sent to the Carlsbad
Committed to AFMSS for processing by LINDA ASKWIG on 01/22/2004 (04LA0097AE)APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED

Witness Surface Casing

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

Additional Operator Remarks:

This APD is a re-permit for an expired APD.

Surface casing to be set into the Rustler below all fresh water sands.

Production casing will be cemented using Zonesal cement. Production casing cement will be brought up at least 500' above the upmost hydrocarbon bearing zone.

Drilling Procedure, BOPE Diagram, Anticipated Formation Tops and Surface Use Plans attached.

This well is located outside the R-111 Potash Area and inside the Secretary's Potash Order in a barren area for potash. There are no potash leases within 1 mile of this location.

DISTRICT I

1628 N. French Dr., Hobbs, NM 88240

DISTRICT II

811 South First, Artesia, NM 88210

DISTRICT III

1000 Rio Grande Rd., Aztec, NM 87410

DISTRICT IV

2040 South Pacheco, Santa Fe, NM 87506

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102

Revised March 17, 1999

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

2040 South Pacheco

Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT**WELL LOCATION AND ACREAGE DEDICATION PLAT**

API Number	Pool Code	Pool Name
	47545	Nash Draw (Delaware)
Property Code	Property Name	Well Number
001796	POKER LAKE UNIT	188
OGED No.	Operator Name	Elevation
001801	BASS ENTERPRISES PRODUCTION COMPANY	3256'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
C	5	24 S	30 E		660	NORTH	1880	WEST	EDDY

Bottom Hole Location If Different From Surface


UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
40	N		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION I hereby certify the information contained herein is true and complete to the best of my knowledge and belief. <u>William R. Dannels</u> Signature <u>Williams R. Dannels</u> Printed Name <u>Division Drilling Supt.</u> Title <u>1-14-04</u> Date	
	SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. <u>June 13, 2001</u> Date Surveyed <u>Gregory L. Jones</u> Signature Professional Surveyor No. 1554 Certificate No. 7977 BASIN SURVEYS	
	(Seal of Gregory L. Jones, Professional Surveyor, No. 1554, Certificate No. 7977, BASIN SURVEYS)	
	(Seal of Gregory L. Jones, Professional Surveyor, No. 1554, Certificate No. 7977, BASIN SURVEYS)	

**SECTION 5, TOWNSHIP 24 SOUTH, RANGE 30 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.**

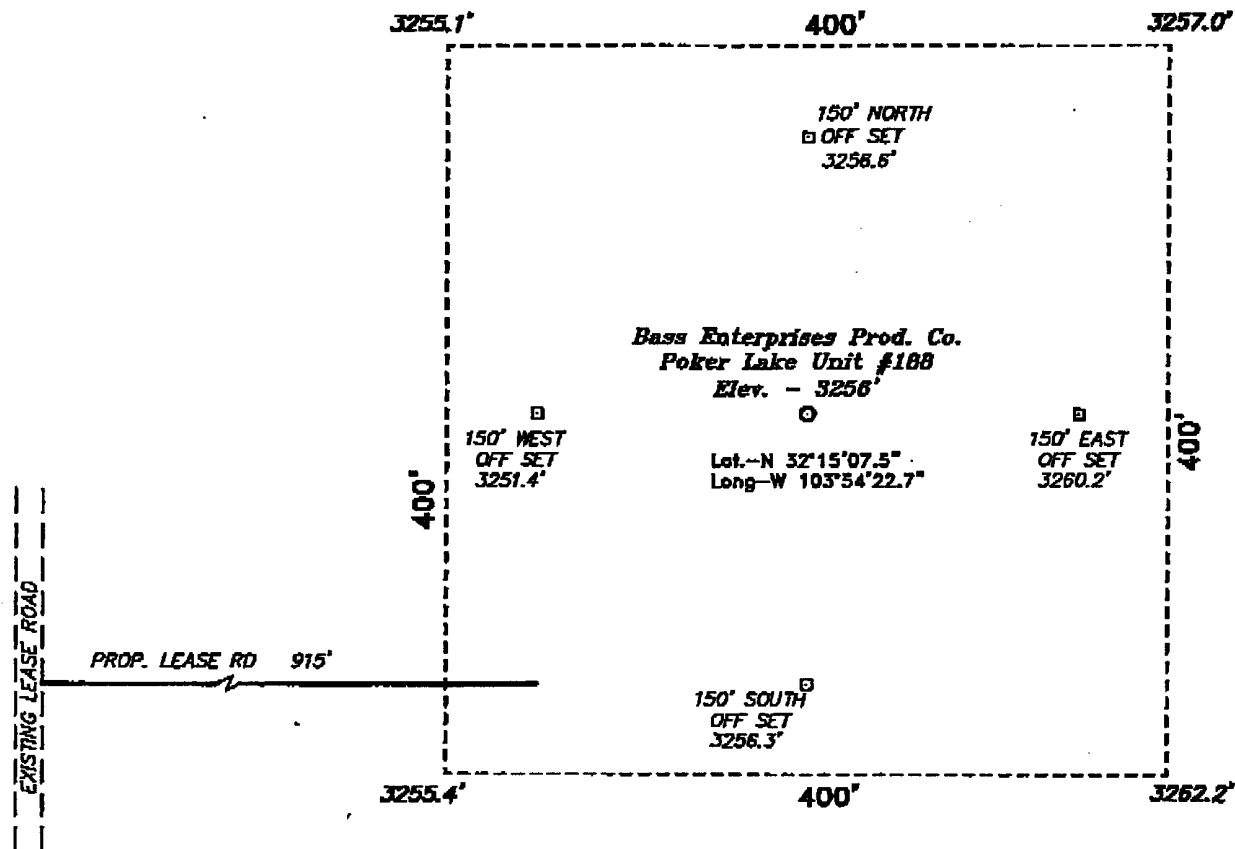

100 0 100 200 FEET

SCALE: 1" = 100'

BASS ENTERPRISES PRODUCTION CO.

REF: Poker Lake Unit No. 188 / Well Pad Topo

THE POKER LAKE UNIT No. 188 LOCATED 660' FROM
THE NORTH LINE AND 1880' FROM THE WEST LINE OF
SECTION 5, TOWNSHIP 24 SOUTH, RANGE 30 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.


BASIN SURVEYS P.O. BOX 1786—HOBBS, NEW MEXICO

W.D. Number: 1554

Drown By: K. GOAD

Date: 06-15-2001 Disk: KJG CD#3 - 1554A.DWG

Survey Date: 06-13-2001 Sheet 1 of 1 Sheets

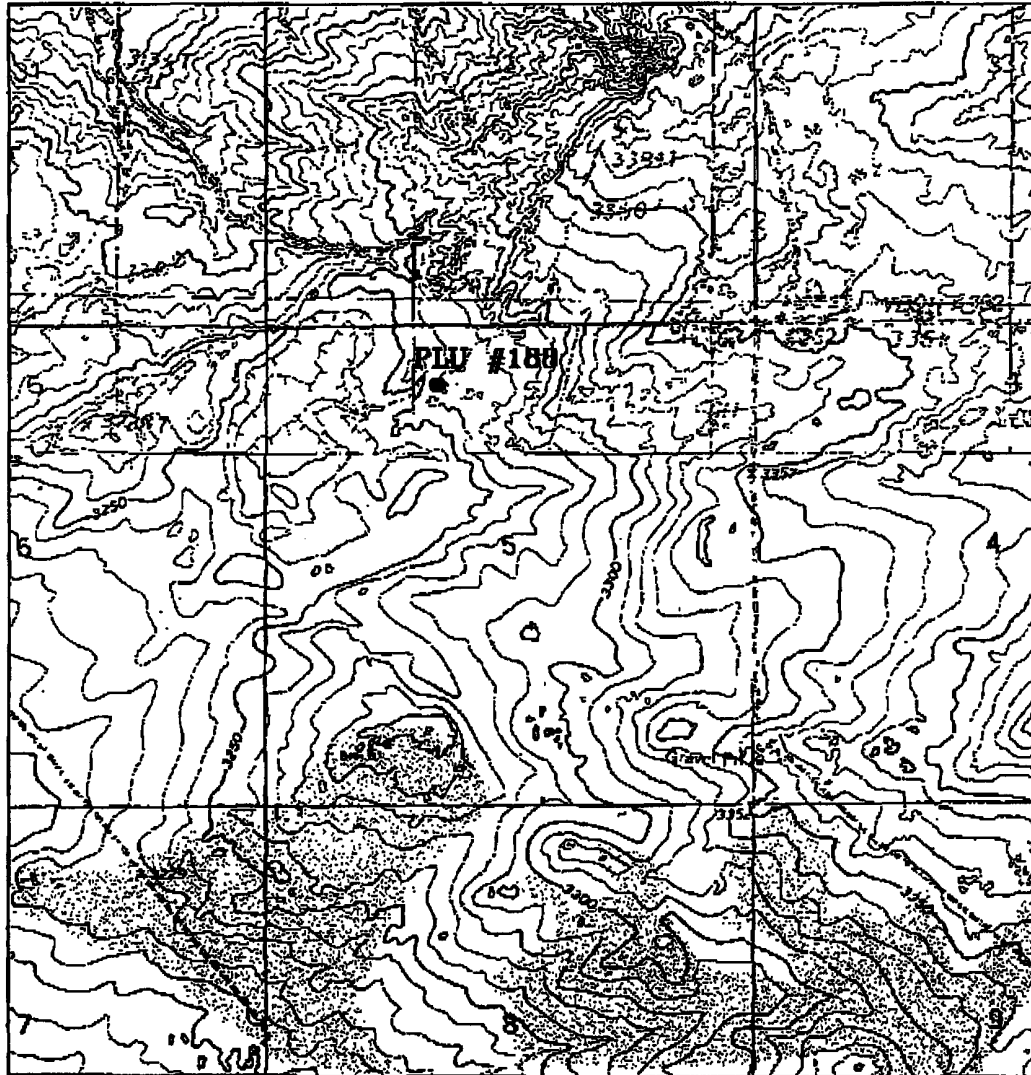**POKER LAKE UNIT #188**

Located at 660' FNL and 1880' FWL
Section 5, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.

basin
surveys

focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(505) 393-7316 - Office
(505) 392-3074 - Fax
basinsurveys.com


W.O. Number: 1554AA - KJG CD#3

Survey Date: 08-13-2001

Scale: 1" = 2000'

Date: 06-15-2001

**BASS ENTERPRISES
PRODUCTION CO.**

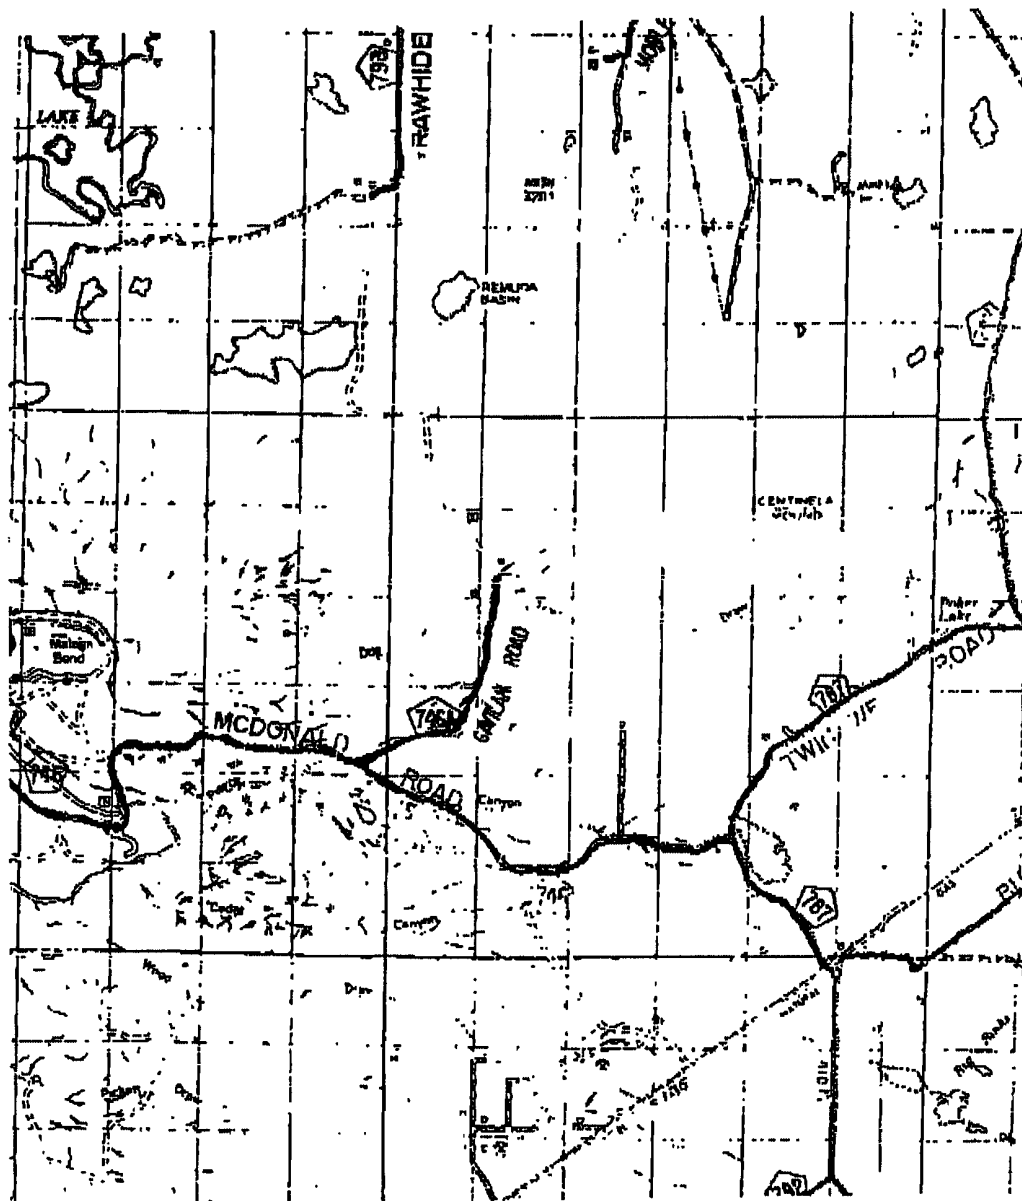

POKER LAKE UNIT #188

Located at 660' FNL and 1880' FWL

Section 5, Township 24 South, Range 30 East,
N.M.P.M., Eddy County, New Mexico.

basin
surveys

focused on excellence
in the oilfield

P.O. Box 1786
1120 N. West County Rd.
Hobbs, New Mexico 88241
(505) 393-7316 - Office
(505) 392-3074 - Fax
basinsurveys.com

W.O. Number: 1554AA - KJG CD#3

Survey Date: 06-13-2001

Scale: 1" = 2 MILES

Date: 06-15-2001

BASS ENTERPRISES
PRODUCTION CO.

EIGHT POINT DRILLING PROGRAM BASS ENTERPRISES PRODUCTION CO.

NAME OF WELL: Poker Lake Unit #188

LEGAL DESCRIPTION - SURFACE: 660' FNL & 1880' FWL, Section 5, T-24-S, R-30-E, Eddy County, New Mexico.

POINT 1: ESTIMATED FORMATION TOPS

(See No. 2 Below)

POINT 2: WATER, OIL, GAS AND/OR MINERAL BEARING FORMATIONS

Anticipated Formation Tops: KB 3269' (est) GL 3256'

<u>FORMATION</u>	<u>ESTIMATED TOP FROM KB</u>	<u>ESTIMATED SUBSEA TOP</u>	<u>BEARING</u>
T/Salt	664'	+2605'	Barren
B/Salt	3369'	- 100'	Barren
T/Lamar Lime	3573'	- 304'	Barren
T/Ramsey Sand	3613'	- 344'	Oil/Gas
T/Lwr Brushy Canyon U Sand	7149'	-3880'	Oil/Gas
T/Lwr Brushy Canyon Y Sand	7289'	-4020'	Oil/Gas
T/Bone Spring Lime	7424'	-4155'	Oil/Gas
TD	7680'	-4411'	

POINT 3: CASING PROGRAM

<u>TYPE</u>	<u>INTERVALS</u>	<u>PURPOSE</u>	<u>CONDITION</u>
14"	0'- 40'	Conductor	New
8-5/8", 24#, WC-55, ST&C	0'- 610'	Surface	New
5-1/2", 15.5#, K-55, LT&C	0'- 6500'	Production	New
5-1/2", 17#, K-55, LT&C	6500'-7680'	Production	New

WITNESS

POINT 4: PRESSURE CONTROL EQUIPMENT (SEE ATTACHED DIAGRAM)

Bass Enterprises recognizes that the minimum BOP equipment is a double 2000 WP BOP equivalent to Diagram 1 of this package. However the actual BOP's used will likely exceed the minimum requirements depending on the rig the operator employs. Bass Enterprises requests a waiver to the testing requirements per Onshore Order 2. This well is located in an area Bass is familiar with and we have chosen to set only a surface sting of 1060' and drill into the low permeability rock of the Bone Spring. 70% of the internal yield of 8-5/8" 28# J-55 LTC is 2373 psi. The Delaware in this area is normally pressured (8.4 ppg MWE) and is not capable of flowing with a full column of fresh water. If for some reason the well does flow, we can not and will not shut the well in due to the low frac gradient at the shoe. The surface casing will only be used as a diverter. Therefore, a BOP test to indicate the BOP's are operating correctly and seal at lower pressures is all that is necessary. We intend to hydrotest the BOP stack, the choke and kill lines, Kelly cock, inside BOP, etc to 200 psi (low) and 1000 psi (high) with clear water using the rig pump. These test will be performed:

- Upon installation
- After any component changes
- Fifteen days after a previous test
- As required by well conditions

A function test to insure that the preventers are operating correctly will be performed on each trip.

POINT 5: MUD PROGRAM

<u>DEPTH</u>	<u>MUD TYPE</u>	<u>WEIGHT</u>	<u>FV</u>	<u>PV</u>	<u>YP</u>	<u>FL</u>	<u>Ph</u>
0' - 610'	FW Spud Mud	8.4 - 9.2	45-38	NC	NC	NC	NC
610' - 5600'	Brine Water	10.0 -10.2	29-30	NC	NC	NC	9.5-10.5
5600' - 7680'	Brine Water/Diesel*	8.9 - 9.0	32-40**	8	2	<25 cc	9.5 - 10

*35% diesel/65% brine emulsion mud

**May increase vis for logging purposes only.

POINT 6: TECHNICAL STAGES OF OPERATION**A) TESTING**

None anticipated.

B) LOGGINGGR-CNL-LDT-AIT from TD to base of salt (\pm 3369').

GR-CNL-CAL from base of salt to surface.

C) CONVENTIONAL CORING

None anticipated.

D) CEMENT

<u>INTERVAL</u>	<u>AMOUNT SXS</u>	<u>FT OF FILL</u>	<u>TYPE</u>	<u>GALS/SX</u>	<u>PPG</u>	<u>FT³/SX</u>
SURFACE:						
Lead 0 - 310' (100% excess circ to surface)	130	310	Permian Basin Critical Zone + ¼ pps Flocele	10.4	12.8	1.90
Tail 310-610' (100% excess circ to surface)	233	300	Prem Plus + 2% CaCl ₂ + ¼ pps Flocele	6.33	14.8	1.35

PRODUCTION: Single stage w/ Zone Seal Cement.

						<u>Nitrogen</u>	<u>Compressive Strength</u>
3300' - 7680' (+ 50% excess)							
Base Slurry	705	4360	Premium Plus + 2% Zone Sealant 2000		9.1-14.5	2.3-1.39	300/600 SCF/BBL
							1200

E) DIRECTIONAL DRILLING

No directional services anticipated.

POINT 7: ANTICIPATED RESERVOIR CONDITIONS

Normal pressures are anticipated throughout Delaware section. A BHP of 3242 psi (max) or MWE of 8.4 ppg is expected. Lost circulation may exist in the Delaware Section from 3613-7680'. Note: A recent gas analysis was conducted in this area and failed to detect the presence of hydrogen sulfide gas in any of our active producing wells therefore no H₂S is anticipated.

POINT 8: OTHER PERTINENT INFORMATION**A) Auxiliary Equipment**

Upper and lower kelly cocks. Full opening stab in valve on the rig floor.

B) Anticipated Starting Date

Upon approval

12 days drilling operations

10 days completion operations

WRD/tlw
January 16, 2004

MULTI-POINT SURFACE USE PLAN

NAME OF WELL: Poker Lake Unit #188

LEGAL DESCRIPTION - SURFACE: 660' FNL & 1880' FWL, Section 5, T-24-S, R-30-E, Eddy County, New Mexico.

POINT 1: EXISTING ROADS

A) Proposed Well Site Location:

See Exhibit "A", "B" and survey plats.

B) Existing Roads:

From junction of State Highway 128 and County Road 793 (Rawhide Road), go south and west on County Road 4.0 miles to lease road. Turn south on lease road 3.5 miles to lease road to the east. Turn east through Poker Lake Unit #153/152/167 well pads (0.8 miles). Turn north and go 0.3 miles to Poker Lake Unit #166 well pad and proposed location is 0.25 miles to the east.

C) Existing Road Maintenance or Improvement Plan:

See Exhibit "A", "B" and survey plats.

POINT 2: NEW PLANNED ACCESS ROUTE

A) Route Location:

See exhibit "B" and survey plats, proposed road is \pm 915' in length.

B) Width

12' wide.

C) Maximum Grade

Not applicable.

D) Turnout Ditches

Spaced per BLM requirements.

E) Culverts, Cattle Guards, and Surfacing Equipment

None.

POINT 3: LOCATION OF EXISTING WELLS

Exhibit "A" and "B" indicates existing wells within the surrounding area.

POINT 4: LOCATION OF EXISTING OR PROPOSED FACILITIES

Page 2

- A) Existing facilities within one mile owned or controlled by lessee/operator:

Exhibit "B" indicates existing wells within the surrounding area.

- B) New Facilities in the Event of Production:

Will lay new flowline to those facilities at Poker Lake Unit #153.

- C) Rehabilitation of Disturbed Areas Unnecessary for Production:

Following the construction of production facilities, those access areas required for continued production will be graded to provide drainage and minimize erosion. The areas unnecessary for use will be graded to blend in with the surrounding topography (see Point 10).

POINT 5: LOCATION AND TYPE OF WATER SUPPLY

- A) Location and Type of Water Supply

Fresh water will be hauled from Diamond and Half Water Station 35 miles east of Carlsbad, New Mexico. Brine water will be hauled from Bass' Poker Lake Unit #140 or #153 battery or from commercial facilities.

- B) Water Transportation System

Water hauling to the location will be over the existing and proposed roads.

POINT 6: SOURCE OF CONSTRUCTION MATERIALS

- A) Materials

If not found on location, caliche will be hauled from the nearest BLM approved source.

- B) Land Ownership

Federally Owned.

- C) Materials Foreign to the Site

No construction materials foreign to this area are anticipated for this drill site.

- D) Access Roads

See Exhibit "B".

POINT 7: METHODS FOR HANDLING WASTE MATERIAL

Page 3

A) Cuttings

Cuttings will be contained in the reserve pit.

B) Drilling Fluids

Drilling fluids will be contained in the reserve pit.

C) Produced Fluids

Water production will be contained in the reserve pit.

Hydrocarbon fluid or other fluids that may be produced during testing will be retained in test tanks. Prior to cleanup operations, any hydrocarbon material in the reserve pit will be removed by skimming or burning as the situation would dictate.

D) Sewage

Current laws and regulations pertaining to the disposal of human waste will be complied with.

E) Garbage

Portable containers will be utilized for garbage disposal during the drilling of this well.

F) Cleanup of Well Site

Upon release of the drilling rig, the surface of the drilling pad will be graded to accommodate a completion rig if electric log analysis indicate potential productive zones. The reserve pit will be fenced only in the event livestock is present and bird netted. The fence will be maintained until the pit is backfilled. Reasonable cleanup will be performed prior to the final restoration of the site.

POINT 8: ANCILLARY FACILITIES

None required.

POINT 9: WELL SITE LAYOUT**A) Rig Orientation and Layout**

Exhibit "C" shows the dimensions of the well pad and reserve pits, and the location of major rig components. Some leveling of the well site will be required. No significant cuts or fills will be necessary.

B) Locations of Pits and Access Road

See Exhibit "B" and "C".

C) Lining of the Pits

The reserve pit will be lined with plastic.

POINT 10: PLANS FOR RESTORATION OF THE SURFACE

A) Reserve Pit Cleanup

The pits will be fenced immediately after construction only if livestock present and shall be maintained until they are backfilled. Previous to backfill operations, any hydrocarbon material on the pits' surfaces shall be removed. The fluids and solids contained in the pits shall be backfilled with soil excavated from the site and soil adjacent to the reserve pits. The restored surface of the pits shall be contoured to prevent impoundment of surface water flow. Water-bars will be constructed as needed to prevent excessive erosion. Topsoil, as available, shall be placed over the restored surface in a uniform layer. The area will be seeded according to the Bureau of Land Management stipulations during the appropriate season following restoration.

B) Restoration Plans - Production Developed

The reserve pits will be backfilled and restored as described above under Item A. In addition, those areas not required for production will be graded to blend with the surrounding topography. Topsoil, as available, will be placed upon those areas and seeded. The portion of the site required for production will be graded to minimize erosion and provide access during inclement conditions. Following depletion and abandonment of the site, restoration procedures will be those that follow under Item C.

C) Restoration Plans - No Production Developed

The reserve pits will be restored as described above. With no production developed, the entire surface disturbed by construction of the well site will be restored. The site will be contoured to blend with the surrounding topography and provide drainage of surface water. The topsoil, as available, shall be replaced in a uniform layer and seeded according to the Bureau of Land Management's stipulations.

D) Rehabilitation's Timetable

Upon completion of drilling operations, the initial cleanup of the site will be performed as soon as weather and site conditions allow economic execution of the work.

POINT 11: OTHER INFORMATION

Page 5

A) Terrain

Relatively flat.

B) Soil

Caliche and sand.

C) Vegetation

Sparse, primarily grasses and mesquite with very little grass.

D) Surface Use

Primarily grazing.

E) Surface Water

There are no ponds, lakes, streams or rivers within several miles of the wellsite.

F) Water Wells

There are no water wells within 1 mile of location.

G) Residences and Buildings

None in the immediate vicinity.

H) Historical Sites

None observed.

I) Archeological Resources

A 400' x 400' archeological survey has been obtained for this well site and filed w/ BLM office (Carlsbad) on 9/17/01. An expanded survey area (600' x 600') will be submitted under separate cover.

J) Surface Ownership

The well site and new access road is on federally owned land.

K) Well signs will be posted at the drilling site.

L) Open Pits

All pits containing liquid or mud will be fenced only if livestock is present and bird-netted.

POINT 12: OPERATOR'S FIELD REPRESENTATIVE

Page 6

(Field personnel responsible for compliance with development plan for surface use).

DRILLING
William R. Dannels
Box 2760
Midland, Texas 79702
(432) 683-2277

PRODUCTION
Mike Waygood
3104 East Green Street
Carlsbad, New Mexico 88220
(505) 887-7329

Kent A. Adams
Box 2760
Midland, Texas 79702
(432) 683-2277

POINT 13: CERTIFICATION


I hereby certify that I, or persons under my direct supervision have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and that the work associated with operations proposed herein will be performed by Bass Enterprises Production Co. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

1-15-04
Date

William R. Dannels
William R. Dannels


WRD/tlw


2000 PSI WP

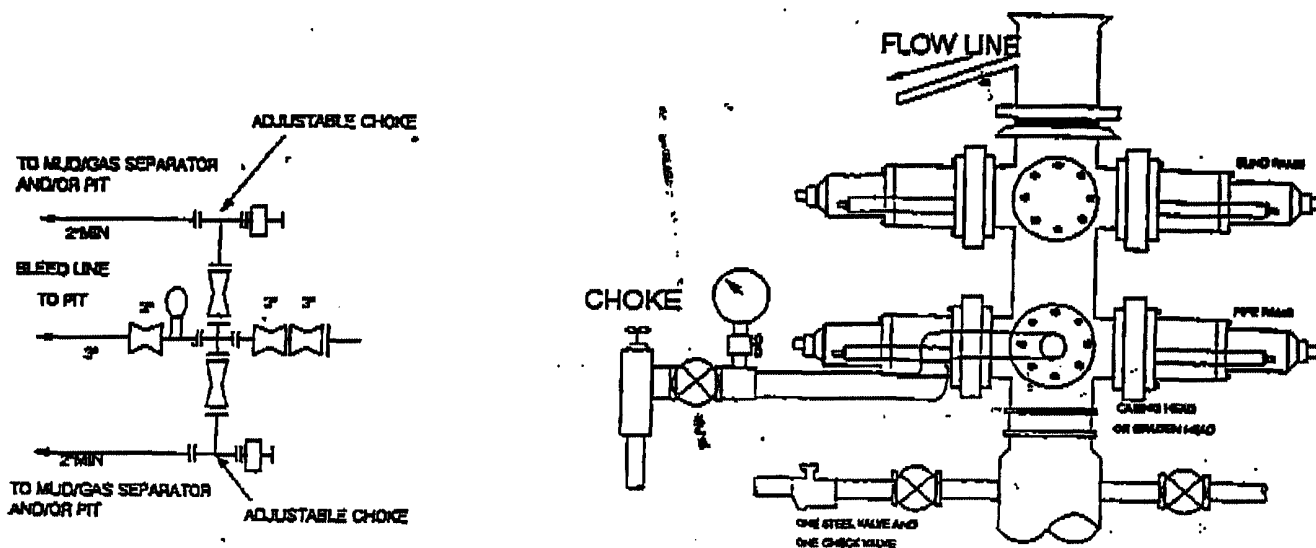



THE FOLLOWING CONSTITUTE MINIMUM BLOWOUT PREVENTER REQUIREMENTS

- A. One double gate blowout preventer with lower rams for pipe and upper rams blind, all hydraulically controlled.
- B. Opening on preventers between rams to be flanged, studded or clamped and at least two inches in diameter.
- C. All connections from operating manifold to preventers to be all steel hose or tube a minimum of one inch in diameter.
- D. The available closing pressure shall be at least 15% in excess of that required with sufficient volume to operate (close, open, and re-close) the preventers.
- E. All connections to and from preventers to have a pressure rating equivalent to that of the BOP's.
- F. Manual controls to be installed before drilling cement plug.
- G. Valve to control flow through drill pipe to be located on rig floor.
- H. All chokes will be adjustable. Choke spool may be used between rams.

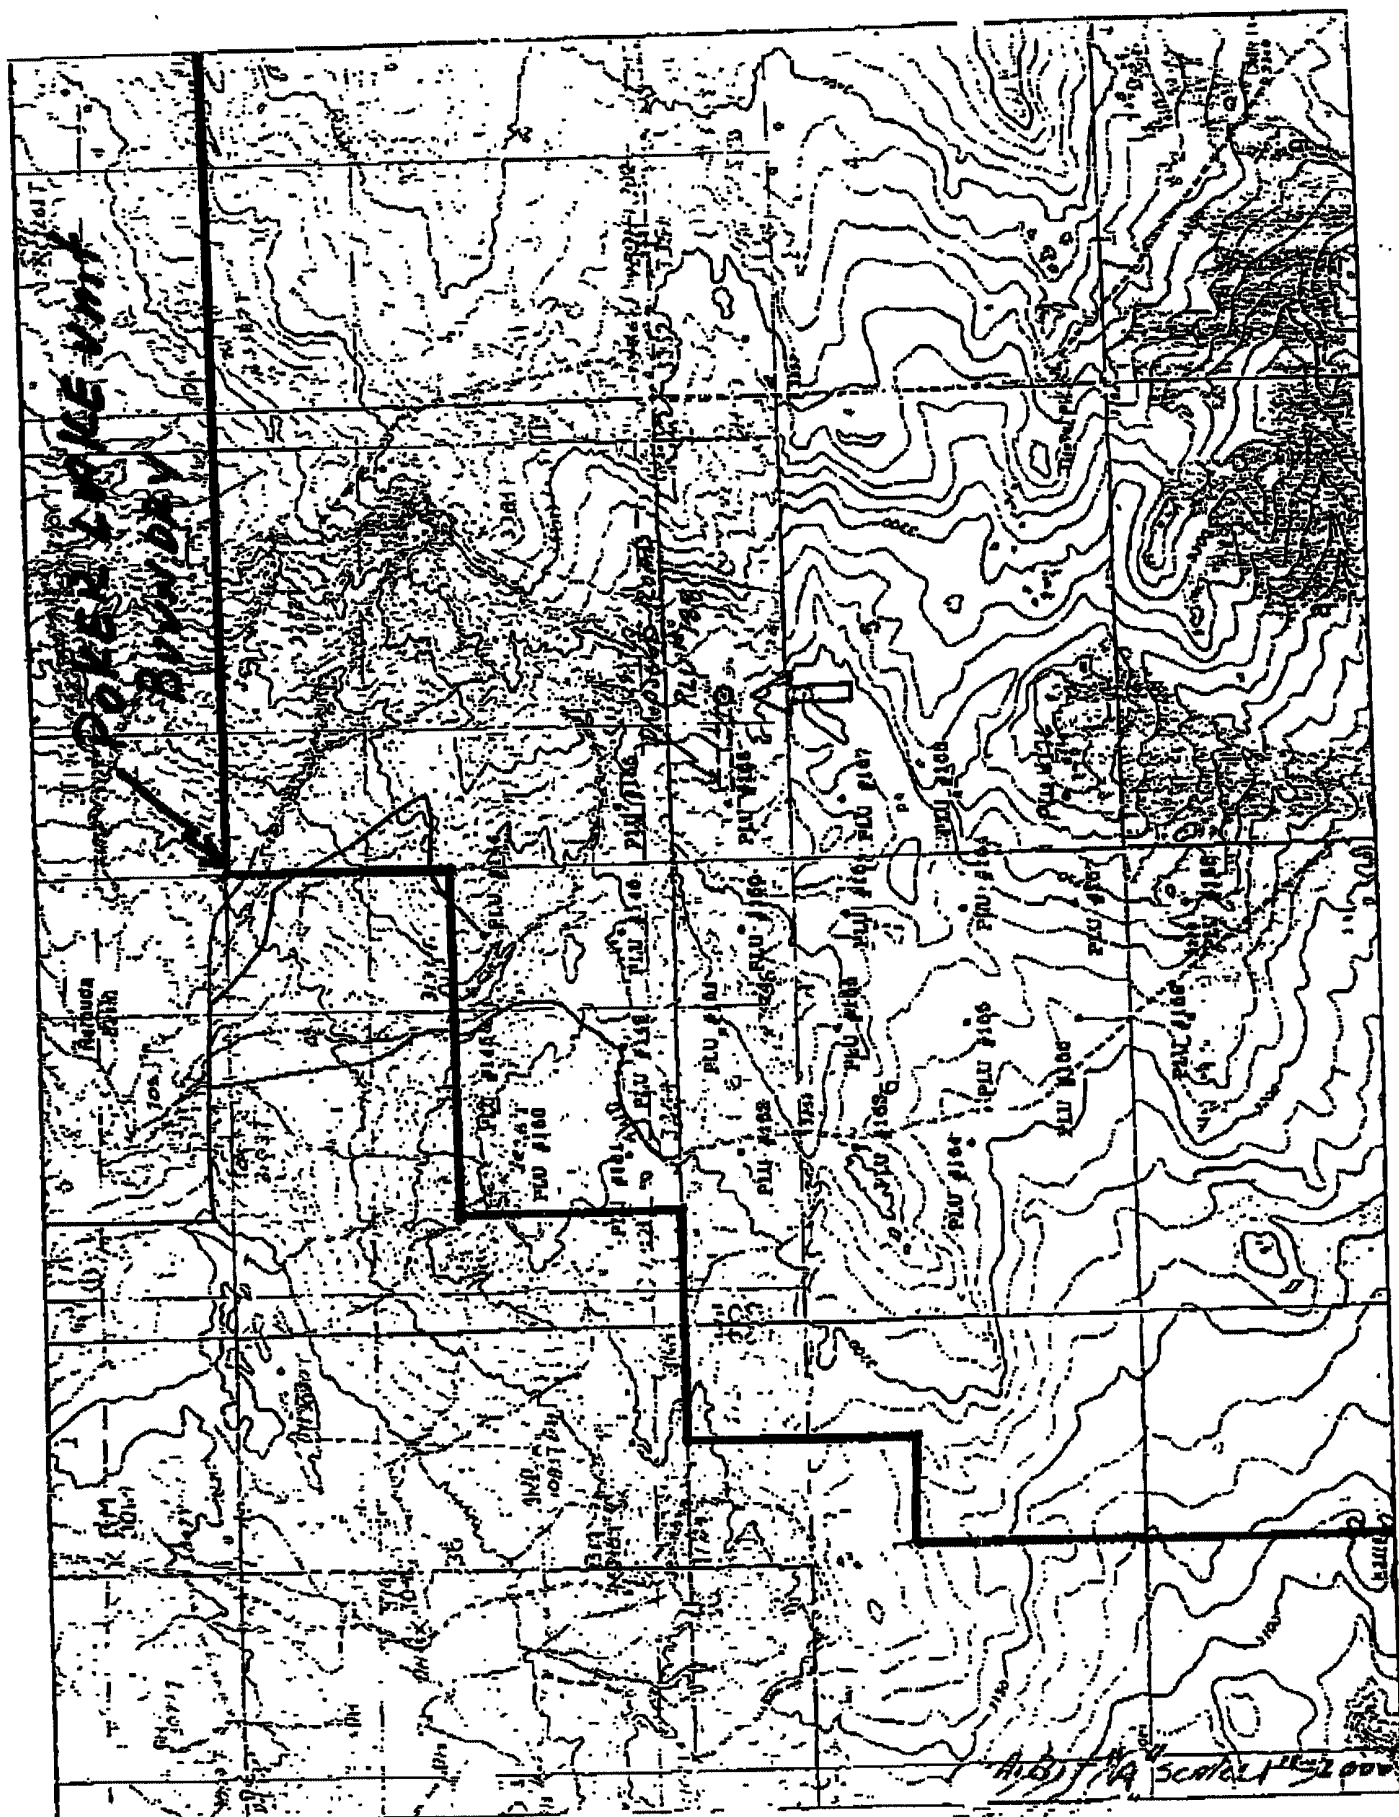

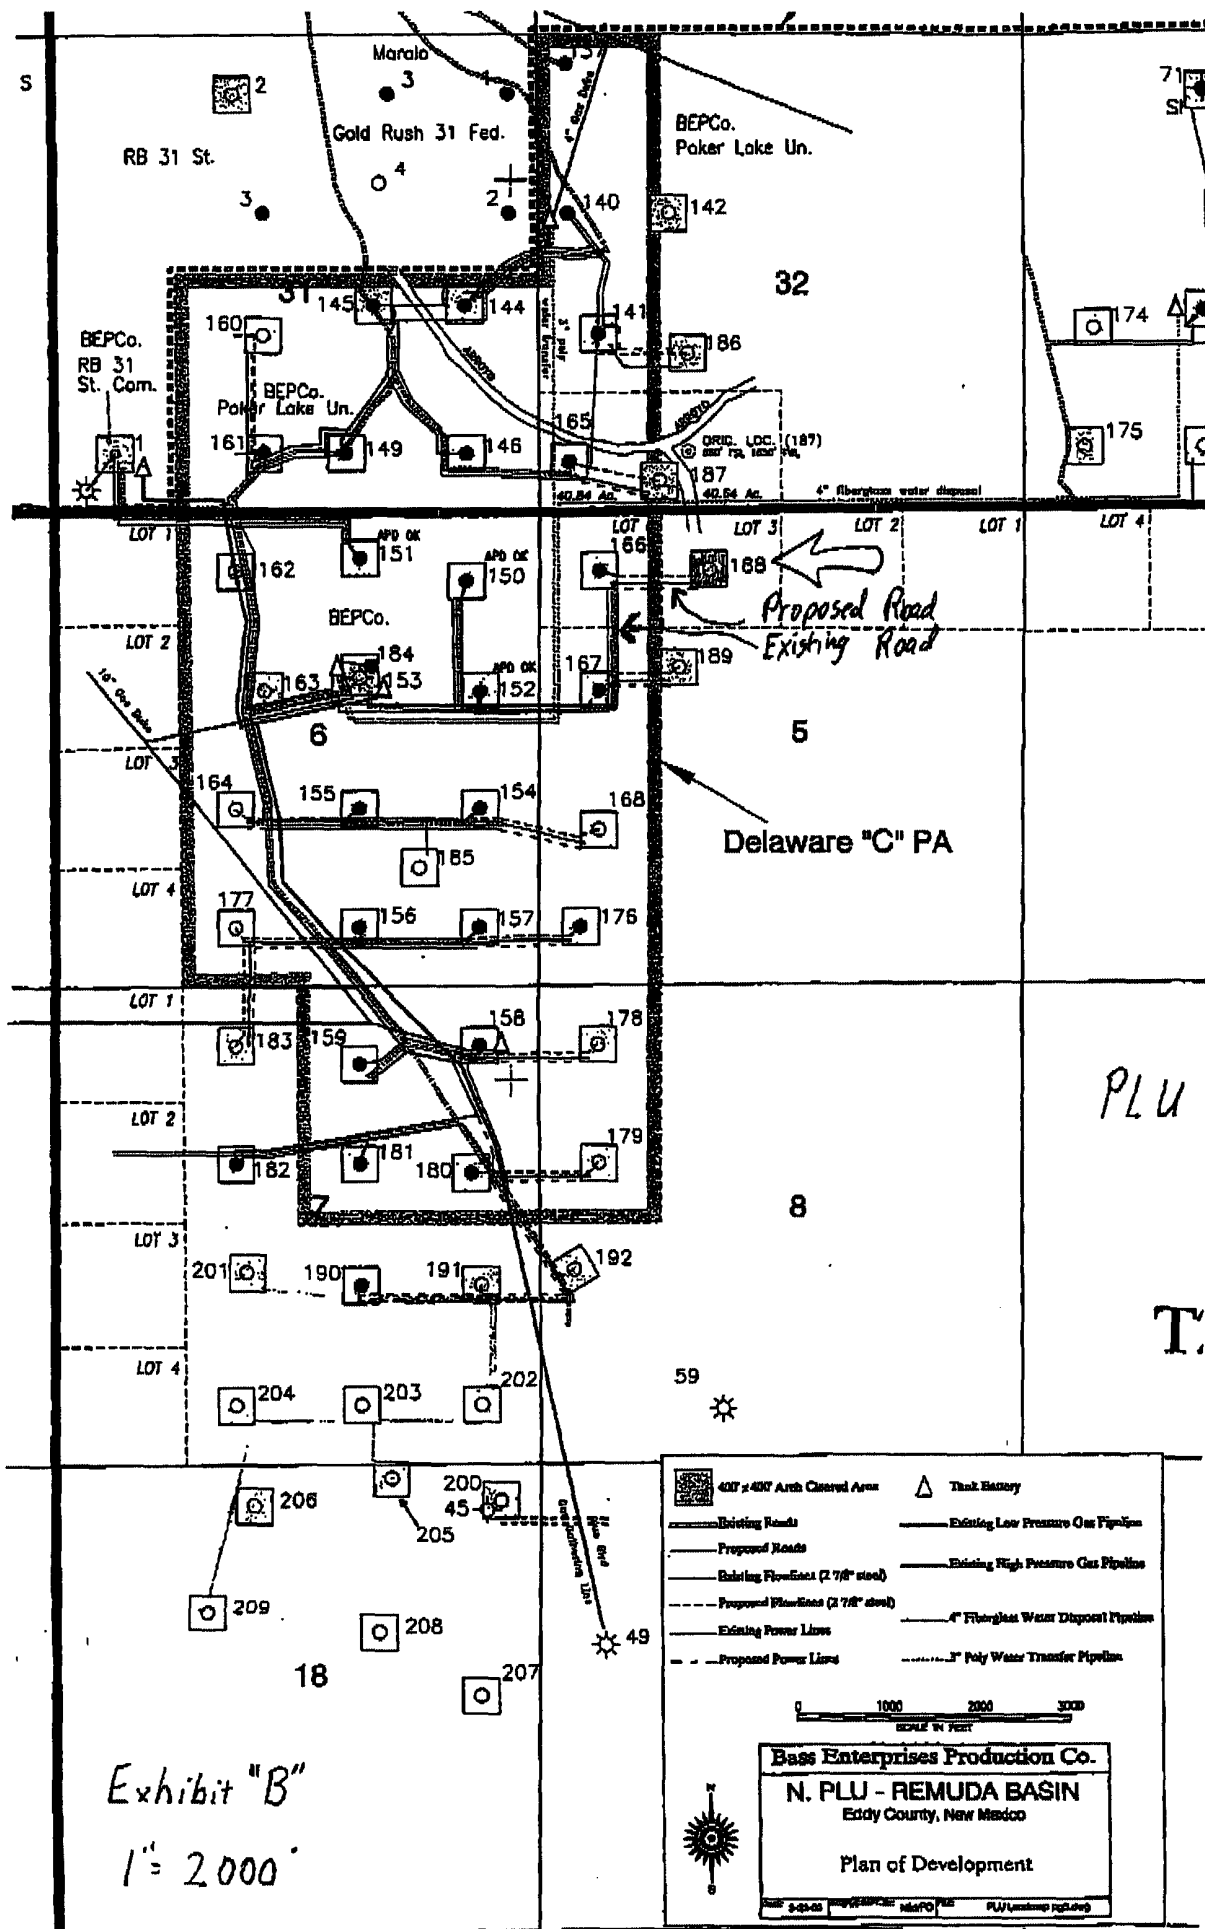


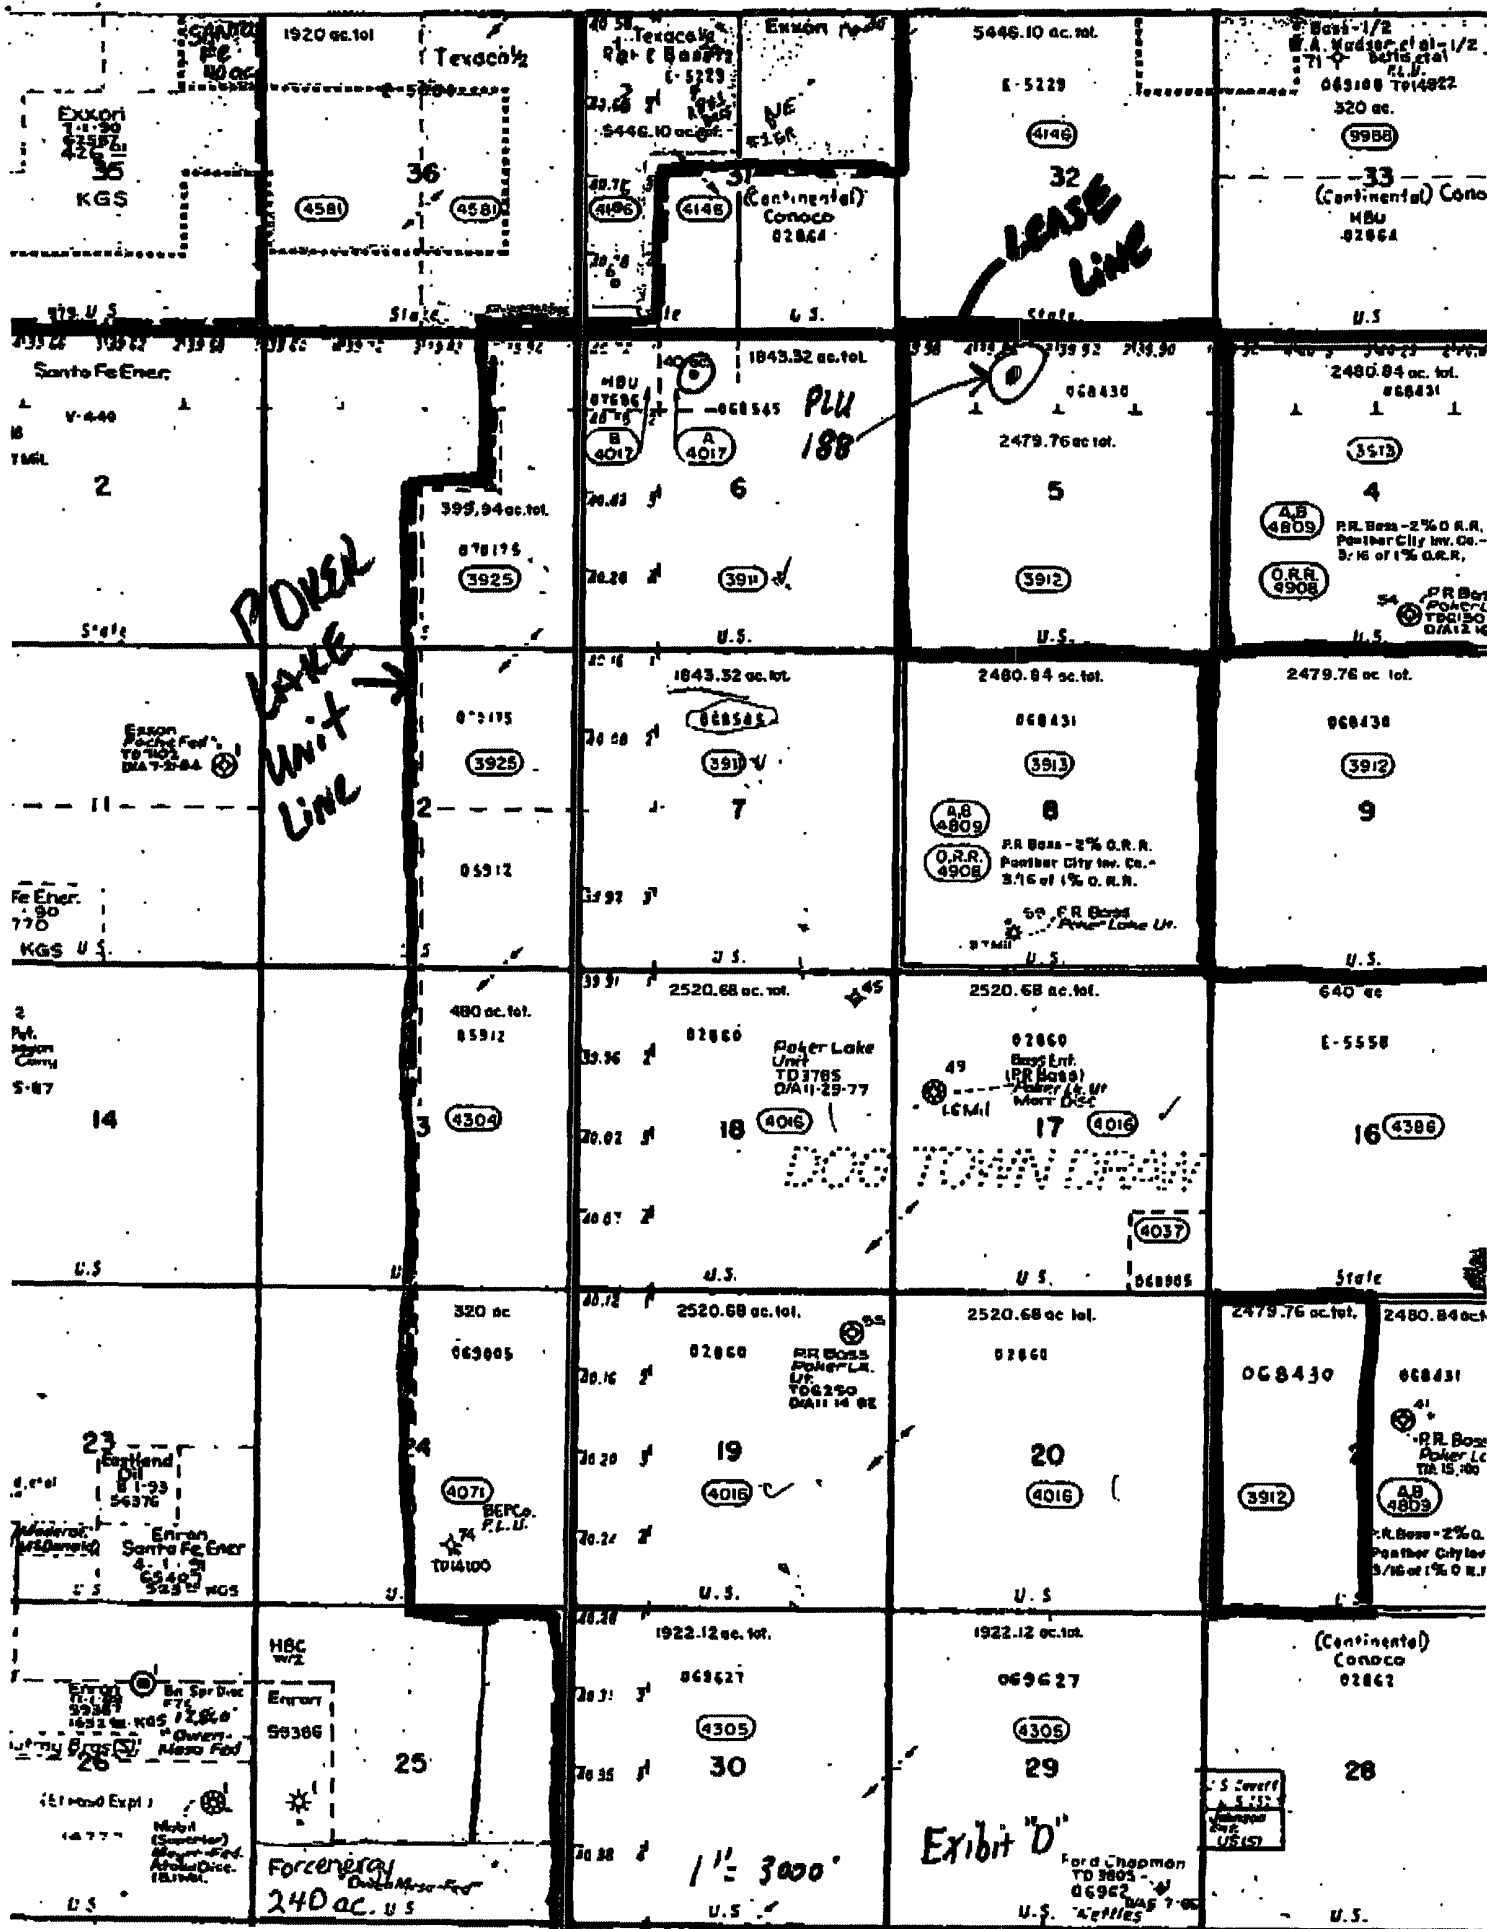

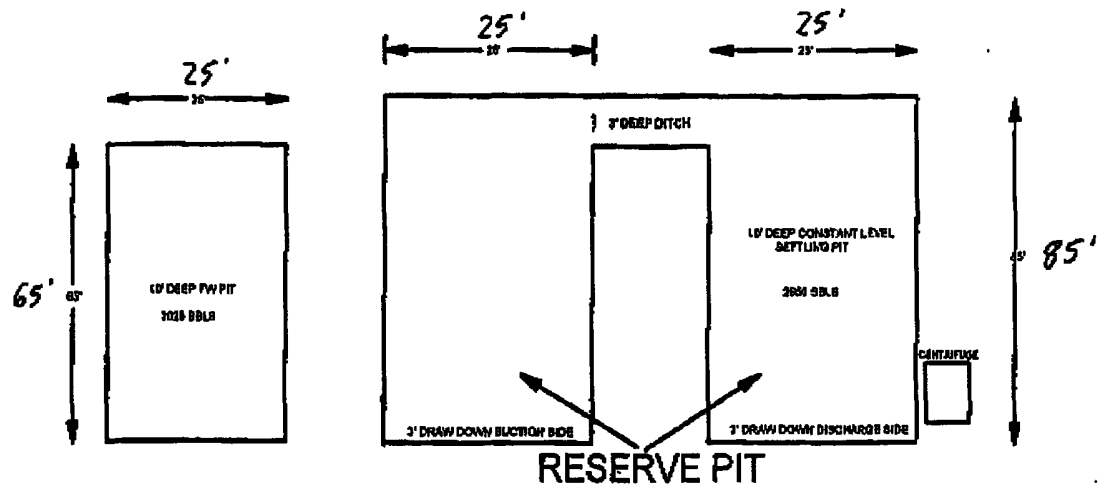

North

EXHIBIT "C"

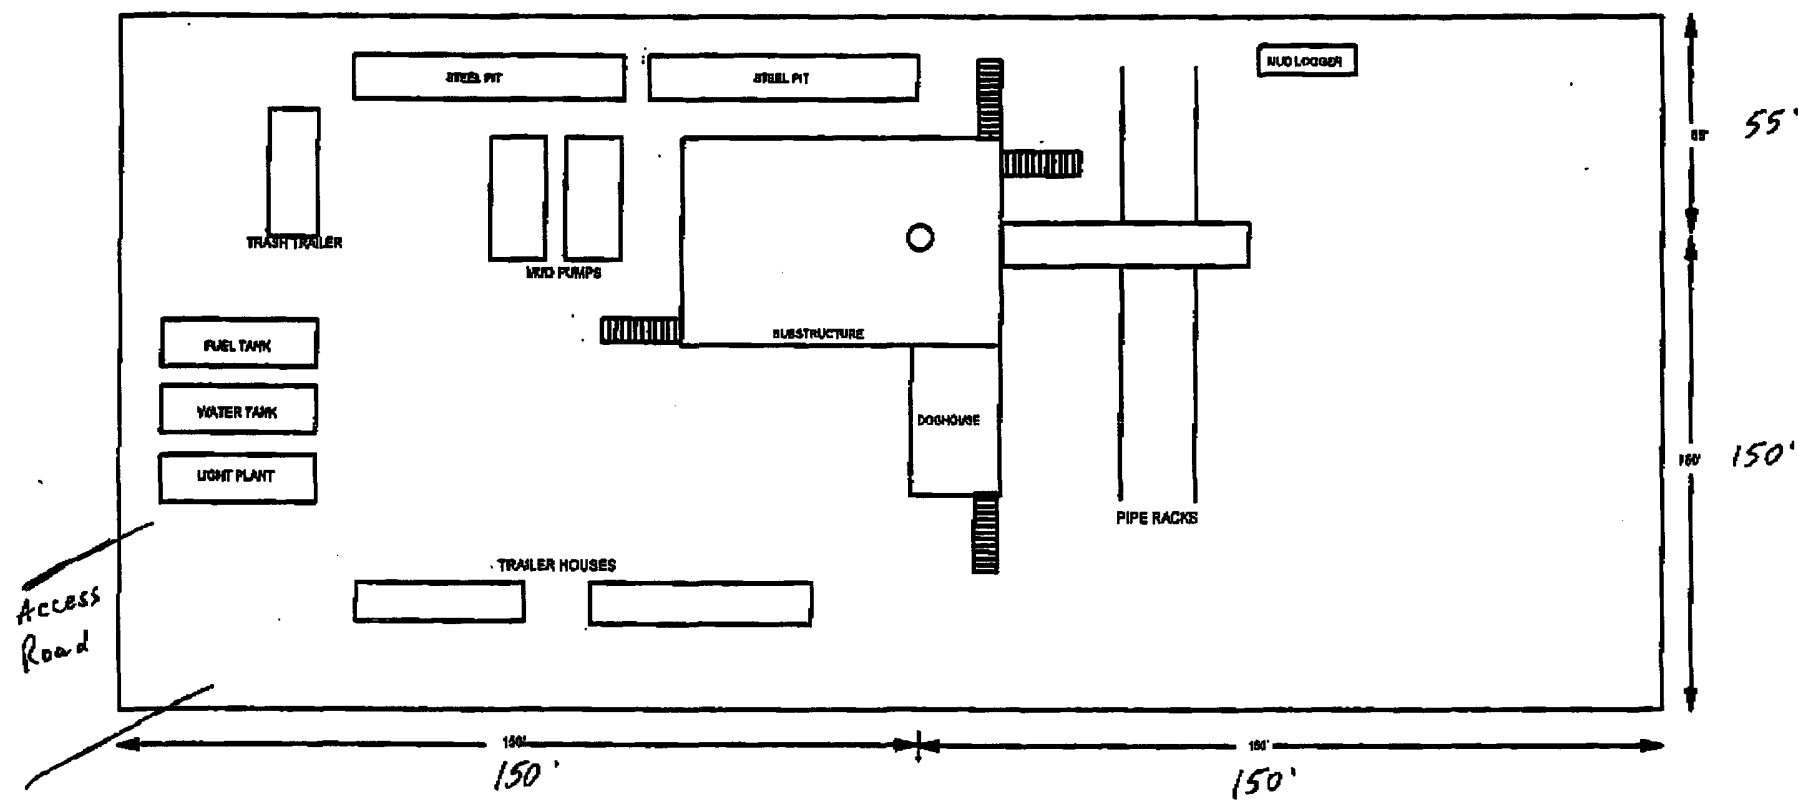

01/10/04 10:00 PM 402 001 0328

DEFLU

+ FAULA

01/10/04