

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-015-02247
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. State 648
7. Lease Name or Unit Agreement Name: East Millman Unit
8. Well Number 145
9. OGRID Number 019958
10. Pool name or Wildcat Millman-Yates-SR-QN-GB-SA East

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection

2. Name of Operator
Stephens & Johnson Operating Co

3. Address of Operator
P O Box 2249, Wichita Falls, TX 76307

4. Well Location

Unit Letter M : 660 feet from the South line and 660 feet from the East line

Section 14 Township 19S Range 28E NMPM County Eddy

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3443' DF: 3441' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐


SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☒
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC.. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attached.



Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms: www.emnrd.state.nm.us/oed.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE William M. Kincaid TITLE Petroleum Engineer DATE 1/13/12

mkincaid@sjoc.net

Type or print name William M. Kincaid E-mail address: mkincaid@sjoc.net PHONE 940-723-2166

For State Use Only

APPROVED BY [Signature] TITLE [Signature] DATE 3/22/2012

Conditions of Approval (if any):

Approved for plugging of well bore only.
Liability under bond is retained pending receipt
of C-103 (Subsequent Report of Well Plugging)
which may be found at OCD Web Page under
Forms: www.emnrd.state.nm.us/oed.

STEPHENS & JOHNSON OPERATING CO.
EAST MILLMAN UNIT WELL NO. 145
API NO. 30-015-02247
EDDY COUNTY, NEW MEXICO

Plug and Abandonment Procedure

11/22/11 MIRU. RIH tagged CIBP @ 1650'. Circ well w/mlf 30 bbls. Spot 25 sx on top of CIBP. POOH. RIH w/wireline. Perf @ 950'. RIH w/pkr to 550' pump 100 sx WOC.

11/23/11 Pressured up on plug, held @ 300 psi for 5 min. Bleed off. Tagged plug @ 729'. Perf @ 575'. RIH w/pkr to 400'. Pump 55 sx, WOC.

11/28/11 Pressure up on plug to 300 psi, held for 5 min. Bleed off. RIH tagged @ 464'. POOH. Perf @ 425' & perf @ 350'. Sqz 100 sx, WOC.

11/29/11 Pressure up on plug, held @ 400 psi for 5 min. Bleed off. RU to pull 4 1/2" csg, pulled on csg. Csg parted @ 320'. Talked to Phil H w/OCD, spotted 50 sx plug on top of stub looking up @ 320'. WOC. RIH tagged plug @ 298'. Plug low, spot 25 more sx @ 298'.

11/30/11 RIH tag @ 198', attempt to circ well @ 60', no return. Talked to Phil w/OCD & David w/S&J, spotted 100 sx @ 198', WOC. RIH tagged @ 165'. Attempt to circ, no return. Talked to Phil H w/OCD & David W w/S&J, spotted 100 sx @ 165' w/lsm, WOC.

12/1/11 RIH tagged plug @ 91', circ well w/25 bbls, got return, pump 150 sx, cmt circ to surface both inside 10 3/4" surface csg and outside of surface csg. POOH. Top well off w/30 sx cmt. Well is P&A. RDMO.

East Millman Unit
WELL 145

Millman Yates-SR-QN-GB-SA 12-1, 2011
FIELD East DATE

— Plug and Abandonment —


KB ELEVATION _____

DF ELEVATION 3443'

GL ELEVATION 3441'

PERMANENT WELL BORE DATA

DATA ON THIS COMPLETION

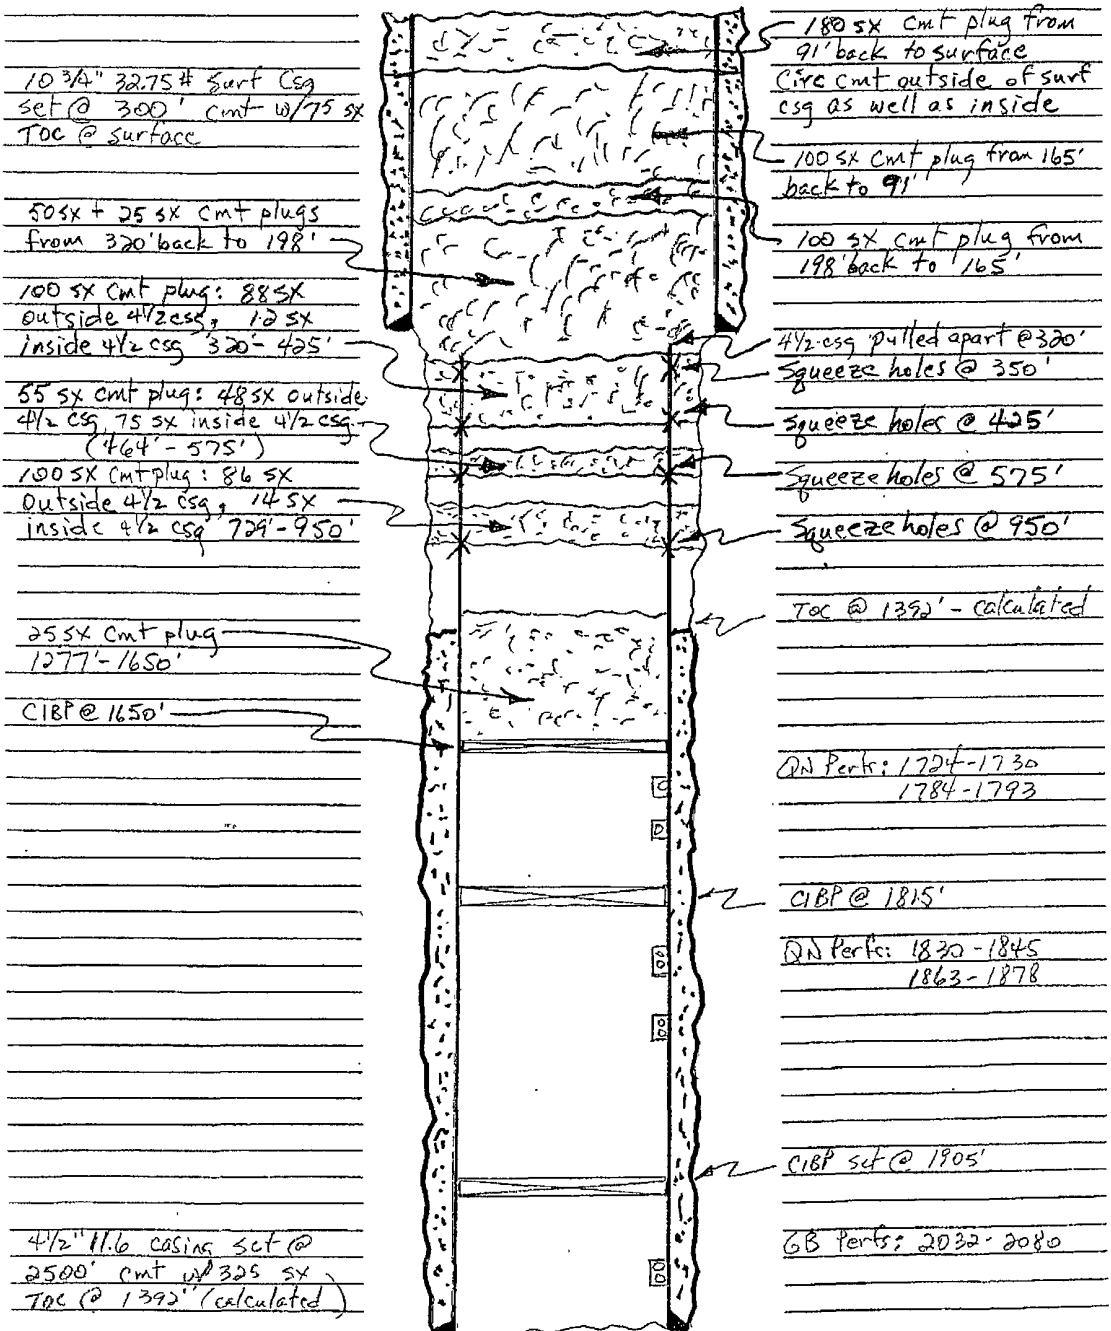

PBTD - 2498'
TD - 2500'