



KB - 19' above GL

Cimarex Energy Co. of Colorado

Trinity 20 Federal Com 2

API #: 30-015-34500

1980' FSL & 660' FWL

Sec. 20, T25S, R26E, Eddy Co., NM

H. Hubbard

9/3/2014


Gas Lift Valves @ 1719', 3217',
4489', 5467', 6281', 6967',
7685', 8437', and 9090'

60' Weatherford Homco style Csg Patch
from 6464'-6524'

TOL @ 9640'

Tag cmt inside 4 1/2 @ 9949'
CICR @ 9980' Circ cmt to 9951 sqz holes
Liner cuts @ 10000' & 10051'
Perf & sqz holes @ 10432' & 10696' - TOC 10096
CICR @ 10700'

PBTD @ 12252'
TD @ 12325'

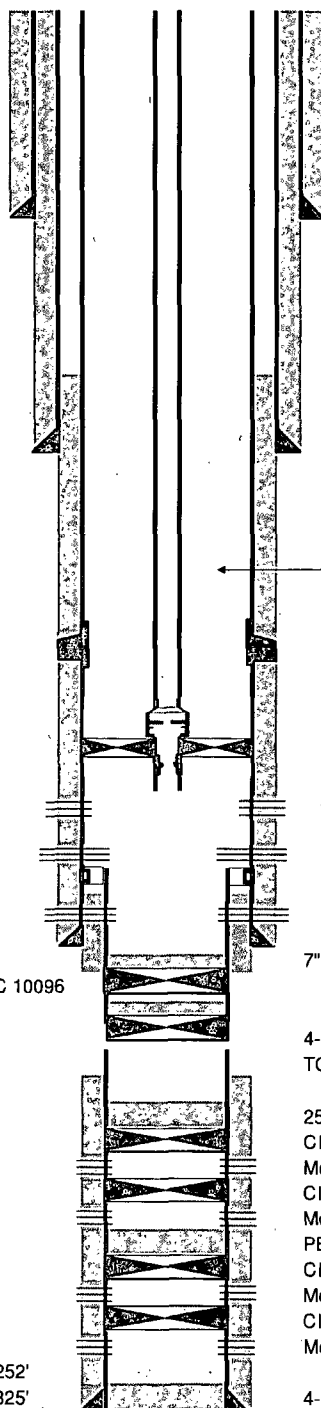

13-3/8" 48# H-40 csg @ 214'
cmt'd w/ 220 sx, Cmt circ.

TOC @ 2400' by TS

9-5/8" 40# J-55 @ 2681'
cmt'd w/ 775 sx, Cmt circ.

279 jts 2-3/8" 4.7# L-80 tbg

DV Tool @ 6502' / @ 6470' by CBL
cmt'd w/ 570 sx

7" Arrowset 1X WSR Packer @ 9132'

Wolfcamp Perfs (9164' - 9411')

Wolfcamp Perfs (9453' - 9600')

Wolfcamp Perfs (9629' - 9930')

7" 26# N-80 csg @ 10001' cmt'd w/ 550 sx

4-1/2" csg stub @ 10800'
TOC @ 10950' by CBL

25 sx cmt plug (11097' - 11400')

CIBP @ 11400'

Morrow perfs (11446' - 11486')

CIBP @ 11540'

Morrow perfs (11561' - 11568')

PBTD @ 11660'

CIBP @ 11690'

Morrow perfs (11721' - 11730')

CIBP @ 11921'

Morrow perfs (12107' - 12112')

4-1/2" 11.6# P-110 csg @ 12310' cmt'd w/ 240 sx