

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB NO. 1004-0137
Expires: January 31, 2018**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMNM121473

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

SUBMIT IN TRIPLICATE - Other instructions on page 2

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

CHEVRON U.S.A. INC.

Contact: DORIAN K FUENTES

E-Mail: djvo@chevron.com

8. Well Name and No.

UH SO 10 P3 15#

9. API Well No.

30-015-43930

3a. Address

ATTN DORIAN FUENTES 6301 DEAUVILLE BLVD
MIDLAND, TX 79706

3b. Phone No. (include area code)

Ph: 432-687-7631

10. Field and Pool or Exploratory Area

PURPLE SAGE; WOLFCAMP (GAS)

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 3 T26S R27E Mer NMP SESW 628FSL 2066FWL
32.065681 N Lat, 104.180269 W Lon

11. County or Parish, State

EDDY COUNTY, TX

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Chevron respectfully request the ability to change the BOPE rating for the selected wells mentioned at the header, from a 10M system to a 5M System. The maximum mud weight at 10500' for the pore pressure is a 13.0 ppg. The MASP under these assumptions will be 4788 psi. The attached documents below reflect a 5M system BOPE rating and test pressures.

Accepted for record - NMOC

Chevron requests a variance to use a FMC Technologies UH-2 multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipples up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the

RECEIVED
JUN 06 2017
NM OIL CONSERVATION
ARTESIA DISTRICT
APPROVAL

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #371339 verified by the BLM Well Information System

For CHEVRON U.S.A. INC., sent to the Carlsbad

Committed to AFMSS for processing by DEBORAH MCKINNEY on 04/03/2017 ()

Name (Printed/Typed) DORIAN K FUENTES

Title REGULATORY SPECIALIST

Signature (Electronic Submission)

Date 03/28/2017

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By	Title	Date
Teungku Muchlis Krueng	PETROLEUM ENGINEER	JUN - 2 2017
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ****

Additional data for EC transaction #371339 that would not fit on the form

32. Additional remarks, continued

well. Please refer to the attached wellhead schematic.

Should questions arise please call me @ 432-687-7631 or Bryson @ 832-683-0938

BLOWOUT PREVENTOR SCHEMATIC

Minimum Requirements


OPERATION : Bone Springs/Wolfcamp A,C & D wells

Minimum System
Pressure Rating : 5,000 psi

SIZE	PRESSURE	DESCRIPTION
A	N/A	Bell Nipple
B	13 5/8"	5,000 psi Annular
C	13 5/8"	5,000 psi Pipe Ram
D	13 5/8"	5,000 psi Blind Ram
E	13 5/8"	5,000 psi Mud Cross
F		
DSA	As required for each hole size	

Kill Line		
SIZE	PRESSURE	DESCRIPTION
2"	5,000 psi	Gate Valve
2"	5,000 psi	Gate Valve
2"	5,000 psi	Check Valve

Choke Line		
SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Gate Valve
3"	5,000 psi	HCR Valve

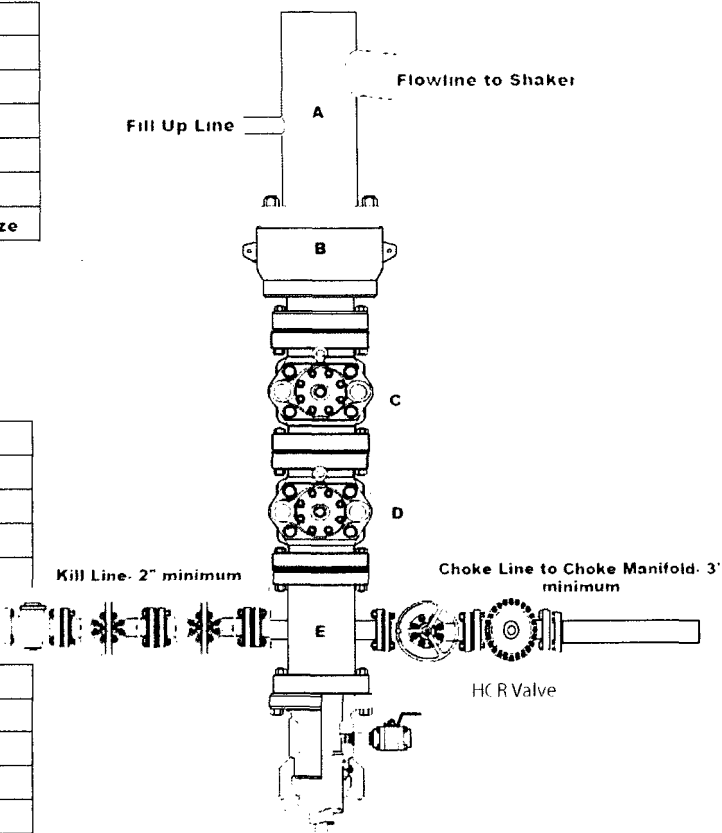

Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ All valves on the kill line and choke line will be full opening and will allow straight through flow.
- ☐ The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration.
- ☐ Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- ☐ A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- ☐ Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

Wellname: _____

Representative: _____

Date: _____

Diagram A

CHOKE MANIFOLD SCHEMATIC


Minimum Requirements

OPERATION : Bone Spring wells/ Intermediate section SWD

Minimum System : 5,000 psi
Pressure Rating : 5,000 psi

Choke Manifold

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Panic Line Valves
2"	5,000 psi	Valves on Choke Lines

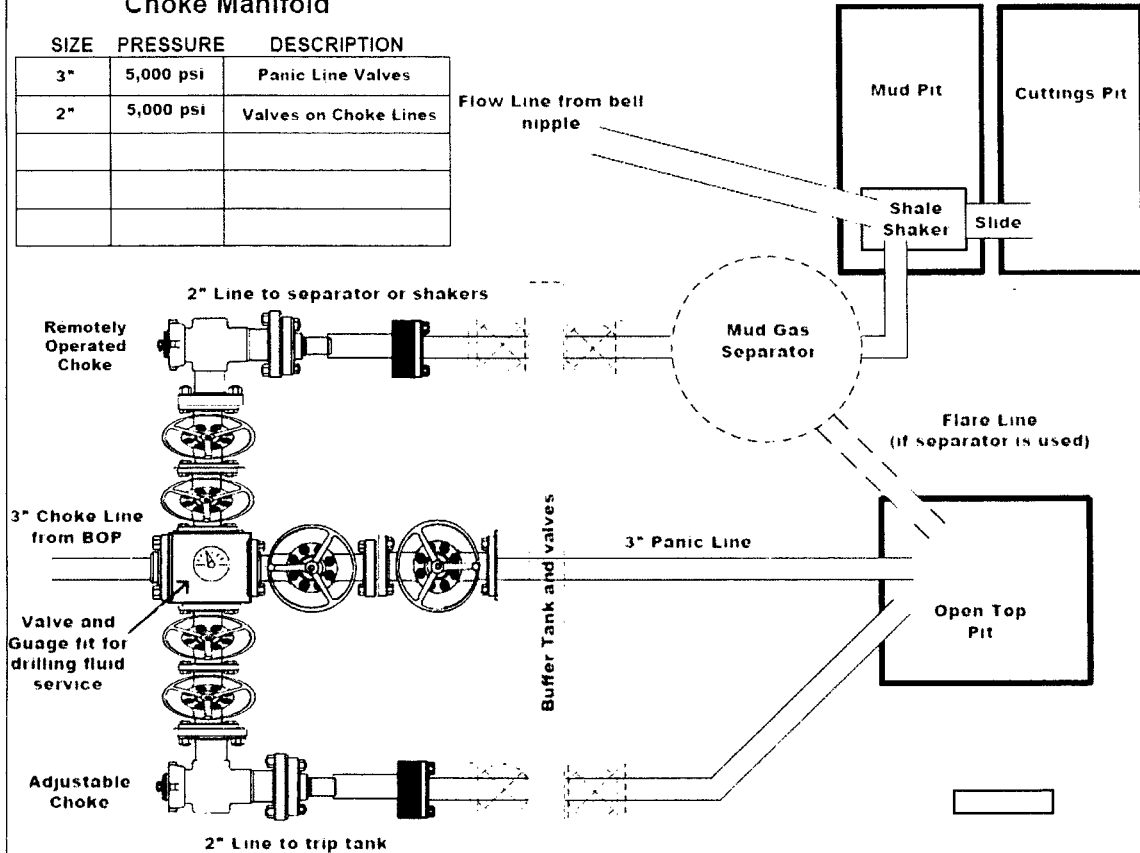

Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment.

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ Adjustable Chokes may be Remotely Operated but will have backup hand pump for hydraulic actuation in case of loss of rig air pressure or power.
- ☐ Flare and Panic lines will terminate a minimum of 150' from the wellhead. These lines will terminate at a location as per approved APD.
- ☐ The choke line, kill line, and choke manifold lines will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration. This excludes the line between mud gas separator and shale shaker.
- ☐ All valves (except chokes) on choke line, kill line, and choke manifold will be full opening and will allow straight through flow. This excludes any valves between mud gas separator and shale shakers.
- ☐ All manual valves will have hand wheels installed.
- ☐ If used, flare system will have effective method for ignition
- ☐ All connections will be flanged, welded, or clamped (no threaded connections like hammer unions)
- ☐ If buffer tank is used, a valve will be used on all lines at any entry or exit point to or from the buffer tank.



After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer

Wellname: _____

Representative: _____

Date: _____

Diagram B

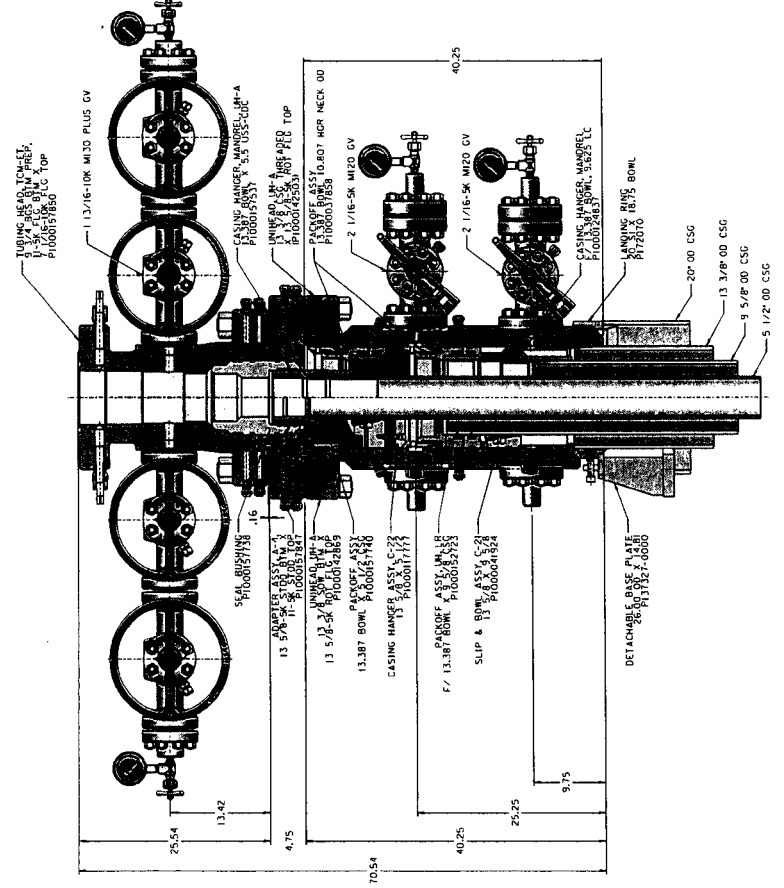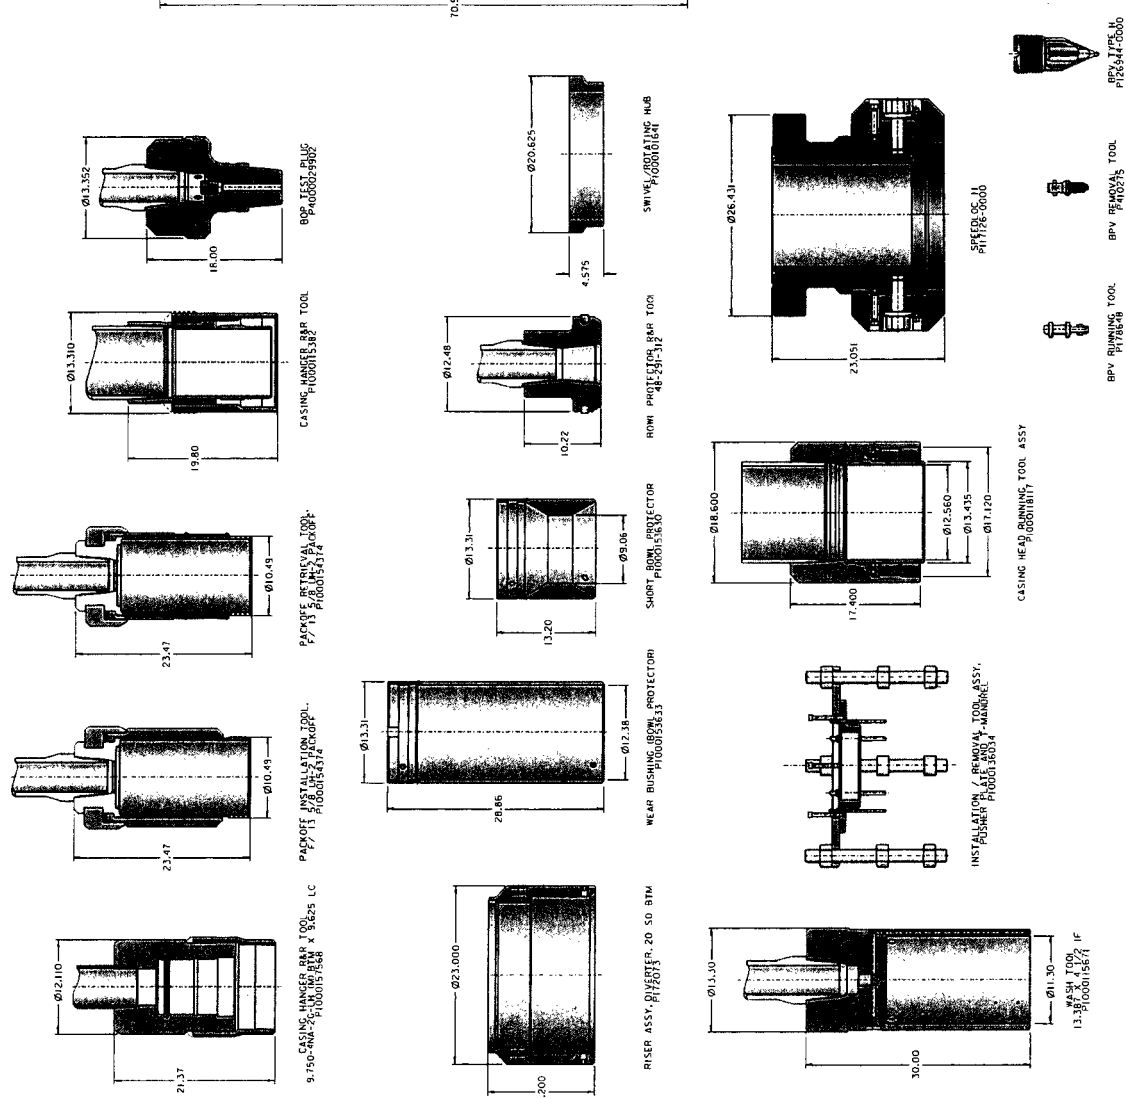CHEVRON
ODESSA

20 X 13 3/8 X 9 5/8 X 5 1/2

<p>PRIVATE AND CONFIDENTIAL</p> <p>This document and all its contents constitute data and are the property of the U.S. Government. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without prior written permission from the U.S. Government. This document is classified as CONFIDENTIAL and its contents are to remain secret.</p>	<p>REVISIONS</p> <p>4. 05-18-15</p>	<p>REASON</p> <p>SURFACE WELLHEAD LAYOUT, UNIHED-2, UH-2, STC CHEVRON, ODESSA</p>	<p>DATE BY</p> <p>06-18-15 O. RUIZ 06-18-15 J. MELO 06-18-15 L. MELO</p>	<p>DMIC</p> <p>DMIC0022066</p>
--	--	--	---	---------------------------------------

PECOS DISTRICT DRILLING OPERATIONS CONDITIONS OF APPROVAL

All previous COA still apply except the following:

PRESSURE CONTROL

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
- e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

TMAK 06022017