

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM114968
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator CHEVRON USA INCORPORATED		7. If Unit or CA Agreement, Name and No.
3a. Address 6301 Deauville Blvd, Midland TX 79706		8. Lease Name and Well No. HH CE 35 2 FED 64 318938
3b. Phone No. (include area code) (432)687-7866		9. API Well No. 30-015-44349
4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface NESE / 2440 FSL / 475 FEL / LAT 32.085642 / LONG -104.153761 At proposed prod. zone NENE / 280 FNL / 330 FEL / LAT 32.107318 / LONG -104.153432		10. Field and Pool, or Exploratory PURPLE SAGE / WOLFCAMP, (GAS)
11. Sec., T. R. M. or Blk. and Survey or Area SEC 35 / T25S / R27E / NMP		12. County or Parish EDDY
13. State NM		14. Distance in miles and direction from nearest town or post office* 11.5 miles
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 330 feet	16. No. of acres in lease 160	17. Spacing Unit dedicated to this well 640
18. Distance from proposed location* to nearest well, drilling, completed, 4300 feet applied for, on this lease, ft.	19. Proposed Depth 9890 feet / 17537 feet	20. BLM/BIA Bond No. on file FED: CA0329
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3145 feet	22. Approximate date work will start* 07/15/2017	23. Estimated duration 130 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature (Electronic Submission)	Name (Printed/Typed) Dorian K Fuentes / Ph: (432)687-7631	Date 12/22/2016
Title Permitting Specialist		
Approved by (Signature) (Electronic Submission)	Name (Printed/Typed) Bobby Ballard / Ph: (575)234-2235	Date 07/26/2017
Title Natural Resource Specialist		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)



NM OIL CONSERVATION
ARTESIA DISTRICT

AUG 01 2017

Rwp 8-2-17 RECEIVED

INSTRUCTIONS

GENERAL: This form is designed for submitting proposals to perform certain well operations, as indicated on Federal and Indian lands and leases for action by appropriate Federal agencies, pursuant to applicable Federal laws and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from local Federal offices.

ITEM 1: If the proposal is to redrill to the same reservoir at a different subsurface location or to a new reservoir, use this form with appropriate notations. Consult applicable Federal regulations concerning subsequent work proposals or reports on the well.

ITEM 4: Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local Federal offices for specific instructions.

ITEM 14: Needed only when location of well cannot readily be found by road from the land or lease description. A plat, or plats, separate or on the reverse side, showing the roads to, and the surveyed location of, the well, and any other required information, should be furnished when required by Federal agency offices.

ITEMS 15 AND 18: If well is to be, or has been directionally drilled, give distances for subsurface location of hole in any present or objective productive zone.

ITEM 22: Consult applicable Federal regulations, or appropriate officials, concerning approval of the proposal before operations are started.

NOTICES

The Privacy Act of 1974 and regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 25 U.S.C. 396; 43 CFR 3160

PRINCIPAL PURPOSES: The information will be used to: (1) process and evaluate your application for a permit to drill a new oil, gas, or service well or to reenter a plugged and abandoned well; and (2) document, for administrative use, information for the management, disposal and use of National Resource Lands and resources including (a) analyzing your proposal to discover and extract the Federal or Indian resources encountered; (b) reviewing procedures and equipment and the projected impact on the land involved; and (c) evaluating the effects of the proposed operation on the surface and subsurface water and other environmental impacts.

ROUTINE USE: Information from the record and/or the record will be transferred to appropriate Federal, State, and local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecution, in connection with congressional inquiries and for regulatory responsibilities.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this application and disclosure of the information is mandatory only if you elect to initiate a drilling or reentry operation on an oil and gas lease.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to allow evaluation of the technical, safety, and environmental factors involved with drilling for oil and/or gas on Federal and Indian oil and gas leases. This information will be used to analyze and approve applications.

Response to this request is mandatory only if the operator elects to initiate drilling or reentry operations on an oil and gas lease.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

BURDEN HOURS STATEMENT: Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C Street, N.W., Mail Stop 401 LS, Washington, D.C. 20240.

Additional Operator Remarks

Location of Well

- I. SHL: NESE / 2440 FSL / 475 FEL / TWSP: 25S / RANGE: 27E / SECTION: 35 / LAT: 32.085642 / LONG: -104.153761 (TVD: 0 feet, MD: 0 feet)
PPP: NESE / 2640 FSL / 430 FEL / TWSP: 25S / RANGE: 27E / SECTION: 35 / LAT: 32.086193 / LONG: -104.153603 (TVD: 9890 feet, MD: 17537 feet)
BHL: NENE / 280 FNL / 330 FEL / TWSP: 25S / RANGE: 27E / SECTION: 26 / LAT: 32.107318 / LONG: -104.153432 (TVD: 9890 feet, MD: 17537 feet)

BLM Point of Contact

Name: Priscilla Perez

Title: Legal Instruments Examiner

Phone: 5752345934

Email: pperez@blm.gov

Review and Appeal Rights

A person contesting a decision shall request a State Director review. This request must be filed within 20 working days of receipt of the Notice with the appropriate State Director (see 43 CFR 3165.3). The State Director review decision may be appealed to the Interior Board of Land Appeals, 801 North Quincy Street, Suite 300, Arlington, VA 22203 (see 43 CFR 3165.4). Contact the above listed Bureau of Land Management office for further information.

**PECOS DISTRICT
DRILLING OPERATIONS
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Chevron USA Inc
LEASE NO.:	NMNM114968
WELL NAME & NO.:	64H-HH CE 35 2 Fed
SURFACE HOLE FOOTAGE:	2440'/S & 475'/E
BOTTOM HOLE FOOTAGE:	280'/N & 330'/E
LOCATION:	Section 35, T.25 S., R.27 E., NMPM
COUNTY:	Eddy County, New Mexico

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.**
2. **The operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other wells.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

High Cave/Karst

Possibility of water flows in the Castillo and Salado.

Possibility of lost circulation in the Delaware.

A MINIMUM OF TWO CASING STRINGS CEMENTED TO SURFACE IS REQUIRED IN HIGH CAVE/KARST AREAS. THE CEMENT MUST BE IN A SOLID SHEATH. THEREFORE, ONE INCH OPERATIONS ARE NOT SUFFICIENT TO PROTECT CAVE KARST RESOURCES. A CASING DESIGN THAT HAS A ONE INCH JOB PERFORMED DOES NOT COUNT AS A SOLID SHEATH.

1. The 13-3/8 inch surface casing shall be set at approximately 450 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of

six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Formation below the 13-3/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.

2. The minimum required fill of cement behind the 9-5/8 inch production casing is:

Operator has proposed DV tool at depth of 2100', but will adjust cement proportionately if moved. DV tool shall be set a minimum of 50' below previous shoe and a minimum of 200' above current shoe. Operator shall submit sundry if DV tool depth cannot be set in this range.

a. First stage to DV tool:

- ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office before proceeding with second stage cement job. Operator should have plans as to how they will achieve circulation on the next stage.

b. Second stage above DV tool:

- ☒ Cement to surface. If cement does not circulate, contact the appropriate BLM office. **Excess calculates to 22% - Additional cement may be required.**

If cement does not circulate to surface on the intermediate casing, the cement on the production casing must come to surface.

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

Formation below the 9-5/8" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.

If 75% or greater lost circulation occurs while drilling the intermediate casing hole, the cement on the production casing must come to surface.

3. The minimum required fill of cement behind the 5.5 inch production casing is:

☒ Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.

4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.

2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).

3. **Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.**

- a. **Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.**
- b. **If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.**
- c. **Manufacturer representative shall install the test plug for the initial BOP test.**
- d. **Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.**

- e. **If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**

5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the **Third Bone Springs** formation, and shall be used until production casing is run and cemented.

Proposed mud weight may not be adequate for drilling through Wolfcamp.

Approved for aerated mud, but not air drilling.

E. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

F. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

TMAK 04212017

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Chevron USA Inc.
LEASE NO.:	NMNM114968
WELL NAME & NO.:	64H-HH CE 35 2 Fed
SURFACE HOLE FOOTAGE:	2440'/S & 475'/E
BOTTOM HOLE FOOTAGE	280'/S & 330'/E
LOCATION:	Section 35, T.25 S., R.27 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Cave/Karst
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cave and Karst

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, siting values and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

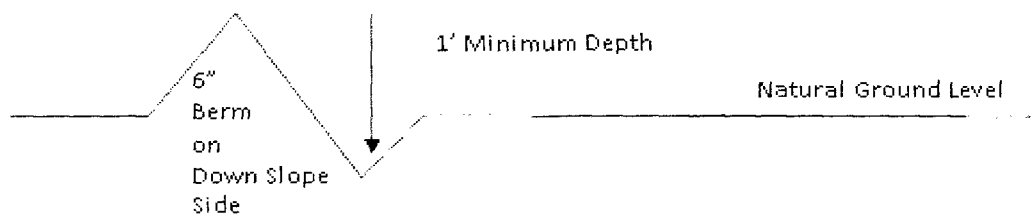

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

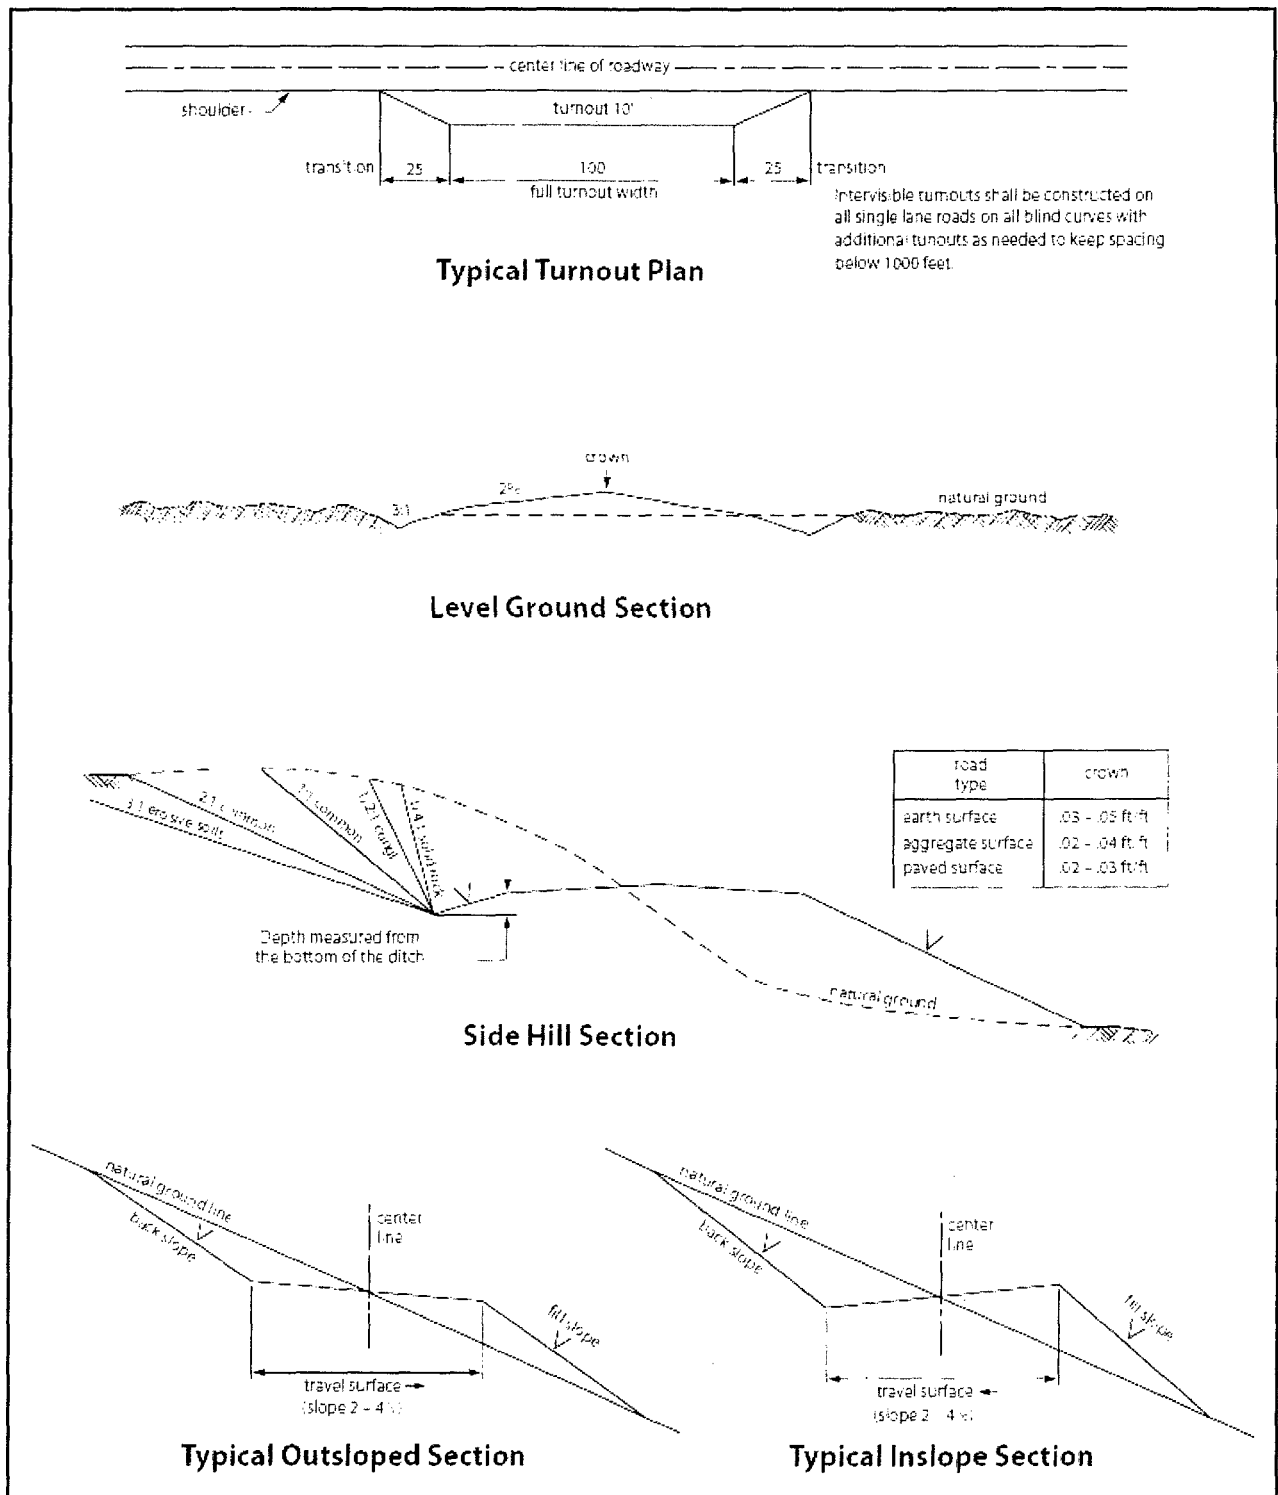


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 *et seq.* (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant (*see* 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies without regard to whether a release is caused by Holder, its agent, or unrelated third parties.

4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing
 - (2) Earth-disturbing and earth-moving work
 - (3) Blasting
 - (4) Vandalism and sabotage;

c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

6. All construction and maintenance activity shall be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.

8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline shall be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

STANDARD STIPULATIONS FOR BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of

the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.

6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.

7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:

- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
- Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
- The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)

8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be

segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.

9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

<input checked="" type="checkbox"/> seed mixture 1	<input type="checkbox"/> seed mixture 3
<input type="checkbox"/> seed mixture 2	<input type="checkbox"/> seed mixture 4
<input type="checkbox"/> seed mixture 2/LPC	<input type="checkbox"/> Aplomado Falcon Mixture

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 1 for Loamy Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed shall be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed shall be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture shall be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed shall be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre shall be doubled. The seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains lovegrass (<i>Eragrostis intermedia</i>)	0.5
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sideoats grama (<i>Bouteloua curtipendula</i>)	5.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Dorian K Fuentes**Signed on:** 12/21/2016**Title:** Permitting Specialist**Street Address:** 6301 Deauville Blvd**City:** Midland**State:** TX**Zip:** 79706**Phone:** (432)687-7631**Email address:** djvo@chevron.com**Field Representative****Representative Name:****Street Address:****City:****State:****Zip:****Phone:****Email address:**

APD ID: 10400009362

Submission Date: 12/22/2016

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400009362

Tie to previous NOS?

Submission Date: 12/22/2016

BLM Office: CARLSBAD

User: Dorian K Fuentes

Title: Permitting Specialist

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM114968

Lease Acres: 160

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? NO

Permitting Agent? NO

APD Operator: CHEVRON USA INCORPORATED

Operator letter of designation:

Keep application confidential? NO

Operator Info

Operator Organization Name: CHEVRON USA INCORPORATED

Operator Address: 6301 Deauville Blvd.

Zip: 79706

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)687-7866

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? EXISTING

Mater Development Plan name: HAYHURST DEVELOPMENT
AREA

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: HH CE 35 2 FED

Well Number: 64

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: PURPLE SAGE

Pool Name: WOLFCAMP,
(GAS)

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Is the proposed well in an area containing other mineral resources? USEABLE WATER,NATURAL GAS,OIL

Describe other minerals:

Is the proposed well in a Helium production area? N Use Existing Well Pad? NO New surface disturbance?

Type of Well Pad: MULTIPLE WELL

Multiple Well Pad Name: HH CE Number: 61 62 63 64 65 66
35 2 FED

Well Class: HORIZONTAL

Number of Legs:

Well Work Type: Drill

Well Type: CONVENTIONAL GAS WELL

Describe Well Type:

Well sub-Type: INFILL

Describe sub-type:

Distance to town: 11.5 Miles

Distance to nearest well: 4300 FT

Distance to lease line: 330 FT

Reservoir well spacing assigned acres Measurement: 640 Acres

Well plat: HH_CE_35_2_FED_64_C_102_06-09-2017.pdf

Well work start Date: 07/15/2017

Duration: 130 DAYS

Section 3 - Well Location Table

Survey Type: RECTANGULAR

Describe Survey Type:

Datum: NAD83

Vertical Datum: NAVD88

Survey number: 0

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	244 0	FSL	475	FEL	25S	27E	35	Aliquot NESE	32.08564 2	- 104.1537 61	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 114968	314 5	0	0
KOP Leg #1	264 0	FSL	330	FEL	25S	27E	35	Aliquot NESE	32.09351	- 104.1531 12	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 114968	314 5	0	0
PPP Leg #1	264 0	FSL	430	FEL	25S	27E	35	Aliquot NESE	32.08619 3	- 104.1536 03	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 114968	- 674 5	175 37	989 0

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	330	FNL	330	FEL	25S	27E	26	Aliquot NENE 1	32.10718 1	- 104.1534 29	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 107369	- 674 5	175 37	989 0
BHL Leg #1	280	FNL	330	FEL	25S	27E	26	Aliquot NENE 8	32.10731 8	- 104.1534 32	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 107369	- 674 5	175 37	989 0

Division
1625 N. French Dr., Hobbs, NM 88240
Phone (505) 393-6161 Fax (505) 393-6721
District II
811 S. First St., Artesia, NM 88210
Phone (505) 748-1203 Fax (505) 748-9723
District III
1030 Rio Brazos Road, Aztec, NM 87410
Phone (505) 334-6178 Fax (505) 334-6179
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3450 Fax (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources
OIL CONSERVATION
1220 South St. Francis Dr.,
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
1 2017
☐ AMENDED REPORT

RECEIVED

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-44349	Post Code 98220	Post Name Purple Sage, Wolfcamp (Gas)
Property Code 318938	Property Name HH CE 35.2 FFD	Well Number 64
OGRID No. 4323	Operator Name CHIVRON U.S.A. INC.	Elevation 3145'

Surface Location

U/I. or lot no.	Section	Township	Range	East 1/4	Feet from the	North/South line	Feet from the	East/West line	County
I	35	25 SOUTH	27 EAST, N.M.P.M.		2440'	SOUTH	475'	EAST	EDDY

Bottom Hole Location If Different From Surface

U/I. or lot no.	Section	Township	Range	East 1/4	Feet from the	North/South line	Feet from the	East/West line	County
A	26	25 SOUTH	27 EAST, N.M.P.M.		280'	NORTH	330'	EAST	EDDY

Dedicated Acres 640	Joint or Infill	Consolidation Code	Order No.
-------------------------------	-----------------	--------------------	-----------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division

<p>LAST TAKE POINT</p> <p>X= 555,857 NAD 27 Y= 402,718 LAT 32.107059 LONG 104.152836</p> <p>X= 597,041 NAD83 Y= 402,775 LAT 32.107181 LONG 104.153429</p> <p>MID POINT</p> <p>X= 555,963 NAD 27 Y= 397,745 LAT 32.093388 LONG 104.152620</p> <p>X= 597,147 NAD83 Y= 397,803 LAT 32.093510 LONG 104.153112</p> <p>FIRST TAKE POINT</p> <p>X= 555,816 NAD 27 Y= 395,083 LAT 32.086070 LONG 104.153111</p> <p>X= 597,000 NAD83 Y= 395,140 LAT 32.086193 LONG 104.153603</p>	<p>PROPOSED BOTTOM HOLE LOCATION</p> <p>X= 555,856 NAD 27 Y= 402,768 LAT 32.107196 LONG 104.152940</p> <p>X= 597,040 NAD83 Y= 402,825 LAT 32.107318 LONG 104.153432</p> <p>CORNER COORDINATES TABLE (NAD 27)</p> <p>A - Y=403056 72. X=553547 34 B - Y=403046 49. X=556180 10 C - Y=397750 87. X=553664 52 D - Y=397744 31. X=556293 47 E - Y=392441 44. X=553540 62 F - Y=392443 13. X=556198 44</p> <p>HH CE 35.2 FFD NO 64 WELL</p> <p>X= 555,787 NAD 27 Y= 394,682 LAT 32.085519 LONG 104.153269</p> <p>X= 596,951 NAD83 Y= 394,940 LAT 32.085642 LONG 104.153761</p> <p>ELEVATION +3145' NAVD 88</p>	<p>Proposed Last Take Point 330' FNL 330' FEL</p> <p>Sec 26</p> <p>Proposed First Take Point 2640' FSL 430' FEL</p> <p>Sec 35</p> <p>N 01°13'30" W 5,023.76'</p> <p>N 03°10'31" E 2,666.34'</p> <p>N 13°36'24" E 206.33'</p>	<p>OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and correct to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill and well at this location pursuant to a contract with an owner of such an interest or working interest or to a voluntary pooling agreement or a compulsory pooling agreement entered into by the division.</p> <p>Signature: <i>[Signature]</i> Date: <i>[Date]</i> Printed Name: <i>[Name]</i> Company Address: <i>[Address]</i></p> <p>SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.</p> <p>Date of Survey: <i>11-10-2016</i> Signature and Seal of Professional Surveyor: <i>[Signature]</i> Certificate Number: <i>23006</i></p>
---	--	--	---

APD ID: 10400009362

Submission Date: 12/22/2016

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
17762	CASTILE	-3626	505	505	LIMESTONE, ANHYDRITE, GYPSUM	NONE	No
15332	BELL CANYON	-5936	2310	2310	SANDSTONE	NONE	No
17719	LAMAR	-6021	2395	2395	LIMESTONE	NONE	No
15316	CHERRY CANYON	-6834	3208	3208	SANDSTONE	NONE	No
17713	BRUSHY CANYON	-8076	4450	4450	SANDSTONE	NONE	No
17688	BONE SPRING	-9925	6299	6299	LIMESTONE	NONE	No
15338	BONE SPRING 1ST	-10514	6888	6888	SANDSTONE	NONE	No
15338	BONE SPRING 1ST	-10540	6914	6914	SHALE	NONE	No
17737	BONE SPRING 2ND	-11247	7621	7621	SANDSTONE	NONE	No
17738	BONE SPRING 3RD	-12243	8617	8617	LIMESTONE	NONE	No
17709	WOLFCAMP	-13516	9890	17537	MUDSTONE	NATURAL GAS, OIL	Yes

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 9890

Equipment: Will have a minimum of 5000 psi rig stack for drill out below surface casing. Stack will be tested as specified in the attached requirements.

Requesting Variance? YES

Variance request: CVX requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold ramp. Chevron would also like to request a variance to use a FMC Technologies conventional wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up ramp; tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days.

Testing Procedure: Test BOP from 250 psi to 5000 psi in Ram and 250 psi to 3500 psi in Annular.

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Choke Diagram Attachment:

HH CE 35 2 FED 64_BOP-Choke_02-20-2017.pdf

BOP Diagram Attachment:

HH CE 35 2 FED 64_BOP Diagram_02-20-2017.pdf

HH CE 35 2 FED 64_9Pt_02-20-2017.pdf

Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	450	0	450	-6745	-7195	450	K-55	54.5	STC	5.11	1.82	DRY	3.97	DRY	2.31
2	INTERMEDIATE	12.25	9.625	NEW	API	Y	0	9015	0	9015	-6745	-15760	9015	L-80	43.5	LTC	1.32	1.45	DRY	1.84	DRY	1.78
3	PRODUCTION	8.5	5.5	NEW	API	N	0	17537	0	17537	-6745	-24282	17537	P-110	20	OTHER	1.5	1.26	DRY	1.35	DRY	2.43

Casing Attachments

Casing ID: 1 String Type: SURFACE

Inspection Document:

Spec Document:

Taperd String Spec:

Casing Design Assumptions and Worksheet(s):

HH CE 35 2 FED 64_9Pt_02-20-2017.pdf

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Taperd String Spec:

HH CE 35 2 FED 64_9Pt_12-22-2016.pdf

Casing Design Assumptions and Worksheet(s):

HH CE 35 2 FED 63_9.625 TXP_02-20-2017.pdf

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Taperd String Spec:

Casing Design Assumptions and Worksheet(s):

HH CE 35 2 FED 64_5.5 TXP_02-20-2017.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	450	356	1.33	14.8	6.37	50	C	Class C
INTERMEDIATE	Lead	2100	0	1100	213	2.43	11.9	14.21		CL h	50/50 Poz Class H + Extender, Antifoam, Retarder, Salt, Viscosifier
INTERMEDIATE	Tail		1100	2100	235	1.33	14.8	6.37	0	C	CLASS C + ANTIFOAM, RETARDER, VISCOSIFIER

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
INTERMEDIATE	Lead	2100	2100	8015	1524	2.43	11.9	13.76	100	H	50/50 Poz Class H + Antifoam, Extender, Salt, Retarder
INTERMEDIATE	Tail		8015	9015	389	1.21	15.6	5.54	50	H	Class H + Retarder, Dispersant
PRODUCTION	Lead		7015	8015	430	1.21	14.5	5.54		H	50/50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder
PRODUCTION	Tail		8015	1753 7	2723	1.2	15.6	5.3	50	H	Class H, + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent

Section 5 - Circulating Medium

Mud System Type: Closed

Will an air or gas system be Used? NO

Description of the equipment for the circulating system in accordance with Onshore Order #2:

Diagram of the equipment for the circulating system in accordance with Onshore Order #2:

Describe what will be on location to control well or mitigate other conditions: In compliance with onshore order #2

Describe the mud monitoring system utilized: Visual Mud monitoring Equipment, PVT, Stroke counter, Flow Sensor in compliance with onshore order #2

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	450	SPUD MUD	8.3	8.7							
450	9015	OIL-BASED MUD	9	9.5							

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
9015	1753 7	OIL-BASED MUD	10	12.5							***The mud weight will range depending on the targeted formation. The Wolfcamp D pore pressure will not exceed 12.5 ppg, but due to wellbore stability, the mud program will exceed the pore pressure.

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests are not planned

The logging program will be as follows:

Type: Mudlogs 2 man mudlog Interval: int Csg to TD Timing: Drillout of Int Csg Vendor TBD

Type: LWD MWD Gamma Interval: Int. and Prod. Hole Timing While drilling Vendor TBD

List of open and cased hole logs run in the well:

GR,MWD,MUDLOG

Coring operation description for the well:

Conventional whole core samples are not planned; directional survey will be run - will send log(s) when run

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 6171

Anticipated Surface Pressure: 3995.2

Anticipated Bottom Hole Temperature(F): 150

Anticipated abnormal pressures, temperatures, or potential geologic hazards? NO

Describe:

Contingency Plans geohazards description:

Contingency Plans geohazards attachment:

Hydrogen Sulfide drilling operations plan required? YES

Hydrogen sulfide drilling operations plan:

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

HH CE 35 2 FED 64_H2S_12-21-2016.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

HH CE 35 2 FED 64_AC Report_02-20-2017.pdf

HH CE 35 2 FED 64_Stand Report_02-20-2017.pdf

HH CE 35 2 FED 64_Well Pad Layout_02-20-2017.pdf

Other proposed operations facets description:

FTP was added to the drilling plan attached above to reflect the C-102.

Other proposed operations facets attachment:

Other Variance attachment:

CHOKE MANIFOLD SCHEMATIC


Minimum Requirements

OPERATION : Bone Spring wells/ Intermediate section SWD

Minimum System Pressure Rating : 5,000 psi

Choke Manifold

SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Panic Line Valves
2"	5,000 psi	Valves on Choke Lines

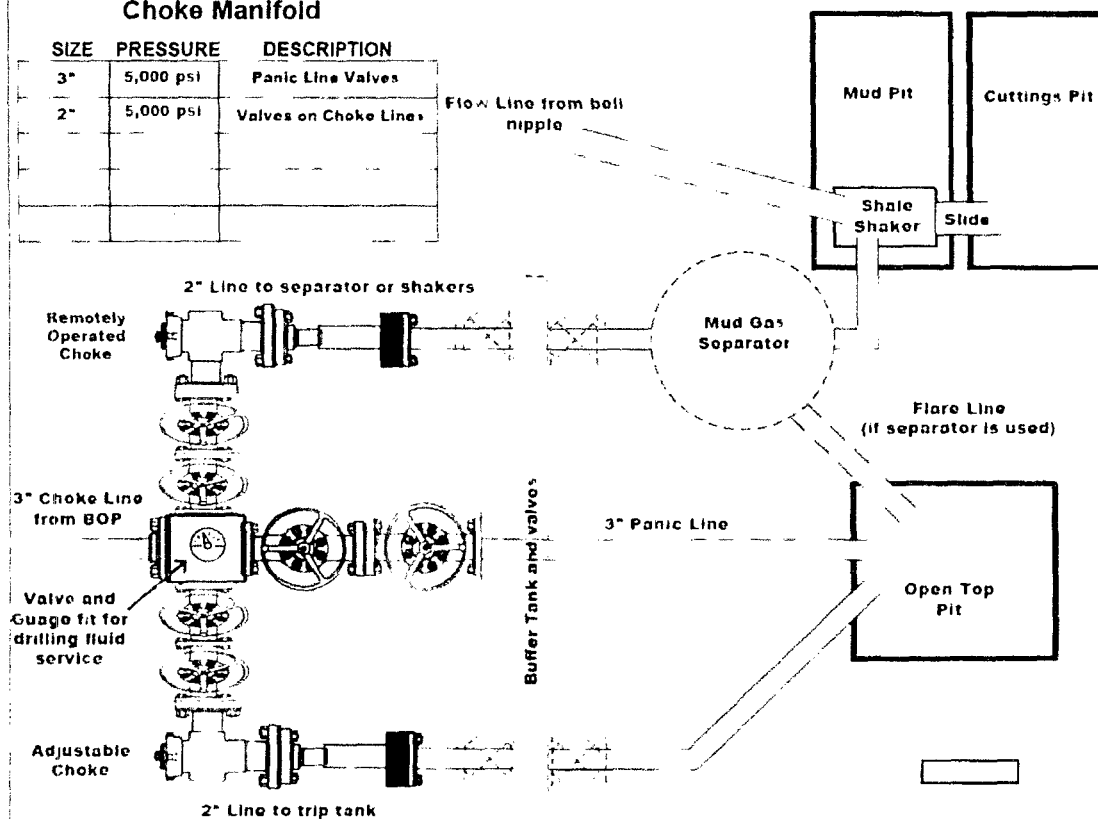

Installation Checklist

The following item must be verified and checked off prior to pressure testing of BOP equipment

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ Adjustable Chokes may be Remotely Operated but will have backup hand pump for hydraulic actuation in case of loss of rig air pressure or power.
- ☐ Flare and Panic lines will terminate a minimum of 150' from the wellhead. These lines will terminate at a location as per approved APD.
- ☐ The choke line, kill line, and choke manifold lines will be straight unless turns use tee blocks or are targeted with running tress, and will be anchored to prevent whip and reduce vibration. This excludes the line between mud gas separator and shale shaker.
- ☐ All valves (except chokes) on choke line, kill line, and choke manifold will be full opening and will allow straight through flow. This excludes any valves between mud gas separator and shale shakers.
- ☐ All manual valves will have hand wheels installed.
- ☐ If used, flare system will have effective method for ignition
- ☐ All connections will be flanged, welded, or clamped (no threaded connections like hammer unions)
- ☐ If buffer tank is used, a valve will be used on all lines at any entry or exit point to or from the buffer tank.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer:

Wellname: _____

Representative: _____

Date: _____

BLOWOUT PREVENTOR SCHEMATIC

Minimum Requirements


OPERATION : Bone Spring wells/ Intermediate section SWD

Minimum System Pressure Rating : 5,000 psi

SIZE		PRESSURE	DESCRIPTION
A		N/A	Bell Nipple
B	13 5/8"	5,000 psi	Annular
C	13 5/8"	5,000 psi	Pipe Ram
D	13 5/8"	5,000 psi	Blind Ram
E	13 5/8"	5,000 psi	Mud Cross
F			
CSA		As required for each hole size	

Kill Line		
SIZE	PRESSURE	DESCRIPTION
2"	5,000 psi	Gate Valve
2"	5,000 psi	Gate Valve
2"	5,000 psi	Check Valve

Choke Line		
SIZE	PRESSURE	DESCRIPTION
3"	5,000 psi	Gate Valve
3"	5,000 psi	HCR Valve

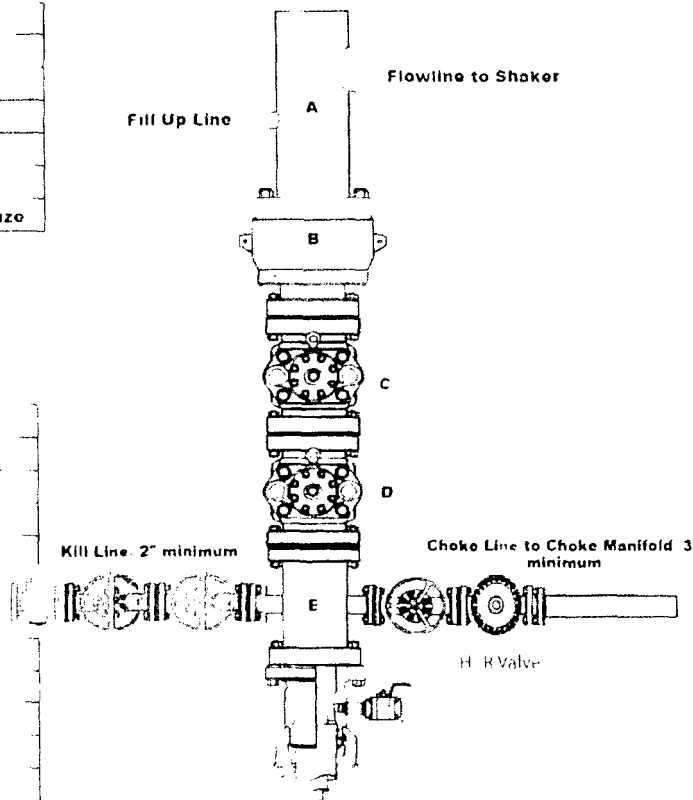

Installation Checklist

The following items must be verified and checked off prior to pressure testing of BOP equipment.

- ☐ The installed BOP equipment meets at least the minimum requirements (rating, type, size, configuration) as shown on this schematic. Components may be substituted for equivalent equipment rated to higher pressures. Additional components may be put into place as long as they meet or exceed the minimum pressure rating of the system.
- ☐ All valves on the kill line and choke line will be full opening and will allow straight through flow.
- ☐ The kill line and choke line will be straight unless turns use tee blocks or are targeted with running tees, and will be anchored to prevent whip and reduce vibration.
- ☐ Manual (hand wheels) or automatic locking devices will be installed on all ram preventers. Hand wheels will also be installed on all manual valves on the choke line and kill line.
- ☐ A valve will be installed in the closing line as close as possible to the annular preventer to act as a locking device. This valve will remain open unless accumulator is inoperative.
- ☐ Upper kelly cock valve with handle will be available on rig floor along with safety valve and subs to fit all drill string connections in use.

After Installation Checklist is complete, fill out the information below and email to Superintendent and Drilling Engineer:

Wellname: _____

Representative: _____

Date: _____

Diagram A

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9342	
Wolfcamp C		9890	
Lateral TVD Wolfcamp C		9890	17537.40'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9342
Oil/Gas	Wolfcamp C	9890

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements. Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the testing and specification documents.

Chevron requests a variance to use a FMC Technologies conventional wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	LTC	New
Production	0'	17,537'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'

Intermediate Casing: 9015'

Production Casing: 17537.40' MD/9,890' TVD (7,500' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
<u>Intermediate</u>								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50	389	5.54
<u>Production</u>								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	17,537'	15.6	1.2	50	2723	5.30

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	17,388'	OBM	10.0 - 12	50 - 70	5.0 - 10

* The mud weights will range depending on the targeted formation. The Wolfcamp C pore pressure will not exceed 12 ppg, but due to wellbore stability, the mud program will exceed the pore pressure.

7. **TESTING, LOGGING, AND CORING**

- a. Drill stem tests are not planned.
- b. The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

- c. Conventional whole core samples are not planned.
- d. A Directional Survey will be run.

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

- a. There is a pressure ramp that will be seen in the Wolfcamp A formation expected. Estimated BHP is:
6171 psi

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9084	
Lateral TVD Wolfcamp A		9084	18718.50'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9084

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MPD

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	18718.50'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9015'
Production Casing: 18952.56' MD/9084.19' TVD (10173.5' VS @ 89.16° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	2.9	1.34	1.79	2.22
Production	1.26	1.66	2.54	1.31

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
<u>Intermediate</u>								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV Tool		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50	389	5.54
<u>Production</u>								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	18718.50'	15.6	1.2	50	3258	5.30

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	18718.50'	OBM	10.0 - 13.5	50 - 70	5.0 - 10

7. TESTING, LOGGING, AND CORING

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

PLEASE REFERENCE MDP

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9186	
Lateral TVD Wolfcamp A		9186	18952.56'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9186

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MPD

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,000'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	18952.56'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9000'
Production Casing: 18952.56' MD/9185.69' TVD (10173.5' VS @ 89.13° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	2.9	1.34	1.79	2.22
Production	1.26	1.66	2.54	1.31

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. **CEMENTING PROGRAM**

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV Tool		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,000'	15.6	1.21	50	389	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	18952.56'	15.6	1.2	50	3258	5.30

ONSHORE ORDER NO. 1
Chevron
HayHurst SO 8 P5 #12H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9,000'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9,000'	18952.56'	OBM	10.0 - 13.5	50 - 70	5.0 - 10

7. TESTING, LOGGING, AND CORING

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

PLEASE REFERENCE MDP

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		8745	
Wolfcamp C		9510	
Lateral TVD Wolfcamp C		9653	19395.01

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	8745
Oil/Gas	Wolfcamp C	9653

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MDP

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9000'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	19,395'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'

Intermediate Casing: 9000'

Production Casing: 19395' MD/9,653' TVD (10097.94' VS @ 89.25° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. **CEMENTING PROGRAM**

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,000'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,000'	9,000'	15.6	1.21	50	389	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	19,395'	15.6	1.2	50	3473	5.30

ONSHORE ORDER NO. 1
Chevron
HayHurst SO 8 P5 #19H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9000'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9000'	19,395'	OBM	10.0 - 13.5	50 - 70	5.0 - 10

7. **TESTING, LOGGING, AND CORING**

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

PLEASE REFERENCE MDP

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		8745	
Wolfcamp C		9709	
Lateral TVD Wolfcamp C		9709	19571.79'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	8745
Oil/Gas	Wolfcamp C	9709

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MDP

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,000'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	19571.79'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9000'
Production Casing: 19571.79' MD/9,709' TVD (10,222.9' VS @ 88.87° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. **CEMENTING PROGRAM**

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,300'	15.6	1.21	50	389	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	19571.79'	15.6	1.2	50	3473	5.30

ONSHORE ORDER NO. 1
Chevron
HayHurst SO 8 P5 #20H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9,000'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9,000'	19571.79'	OBM	10.0 - 13.5	50 - 70	5.0 - 10

7. **TESTING, LOGGING, AND CORING**

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

PLEASE REFERENCE MDP .

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		8745	
Wolfcamp D		10027	
Lateral TVD Wolfcamp D		10027	19932.37'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	8745
Oil/Gas	Wolfcamp D	10027

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MDP

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,000'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	19932.37'	8-1/2"	0"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9300'
Production Casing: 19932.37' MD/9955' TVD (10272.31' VS @ 89.56° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
<u>Intermediate</u>								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,300'	15.6	1.21	50	389	5.54
<u>Production</u>								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	19932.37'	15.6	1.2	50	3605	5.30
<u>Pilot Hole</u>								
Tail	Class C	9,500'	10,000'	17.2	0.97	50-100	50-100	3.61

ONSHORE ORDER NO. 1
Chevron
HayHurst SO 8 P5 #27H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	0	0	0
450'	9,000'	OBM	9.0 - 9.5	50 -70	5.0 - 10
9,000'	19932.37'	OBM	10.0 - 13.5	50 -70	5.0 - 10

7. **TESTING, LOGGING, AND CORING**

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD
Wireline Logs	Quad Combo w/ Di-Pole Sonic, FMI, Lithoscanner	Prod hole	After Intermediate hole	TBD

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

PLEASE REFERENCE MDP

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		8745	
Wolfcamp D		9955	
Lateral TVD Wolfcamp D		9955	19925.13'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	8745
Oil/Gas	Wolfcamp D	9955

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MDP

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,000'	12-1/4"	9-5/8"	43.5 #	L-80	TXP	New
Production	0'	19925.13'	8-1/2"	0"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9300'
Production Casing: 19925.13' MD/9955' TVD (10272.31' VS @ 88.69° inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
<u>Intermediate</u>								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,000'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,000'	9,000'	15.6	1.21	50	389	5.54
<u>Production</u>								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	19925.13'	15.6	1.2	50	3605	5.30
<u>Pilot Hole</u>								
Tail	Class C	9,500'	10,000'	17.2	0.97	50-100	50-100	3.61

ONSHORE ORDER NO. 1
Chevron
HayHurst SO 8 P5 #28H
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	0	0	0
450'	9,000'	OBM	9.0 - 9.5	50 -70	5.0 - 10
9,000'	19925.13'	OBM	10.0 - 13.5	50 -70	5.0 - 10

7. **TESTING, LOGGING, AND CORING**

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD
Wireline Logs	Quad Combo w/ Di-Pole Sonic, FMI,	Prod hole	After Intermediate hole	TBD

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**
PLEASE REFERENCE MDP

Eddy County, NM

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

The formation tops are just an overview of the area TVD and are subjected to change

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9014	
Lateral TVD Wolfcamp A		9014	14,014'-22,000'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9014

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements. Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the testing and specification documents.

Chevron requests a variance to use a FMC Technologies UH-2 Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

4. CASING PROGRAM

- a. The proposed casing program will be as follows: The proposed casing program will be as follows: The ranges of the production casing will range from 5000' -10,000' laterals. The targeted formations will be the Wolfcamp A. The casing loads were based on the worst case senerio (10,000' lateral)

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	TXP	New
Production	0'	14,014'-22,000'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

- b. Casing design subject to revision based on geologic conditions encountered.
- c. ***A "Worst Case" casing design for wells in a particular area is used below to calculate the Casing Safety Factors. If for any reason the casing design for a particular well requires setting casing deeper than the following "worst case" design, then the Casing Safety Factors will be recalculated & sent to the BLM prior to drilling.
- d. Chevron will fill casing at a minimum of every 20 jts (840') while running for intermediate and production casing in order to maintain collapse SF.

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9015'
Production Casing: 14,014'-22,000' MD/9,014' TVD (5,000'-10,000' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	2.9	1.34	1.79	2.22
Production	1.26	1.66	2.54	1.31

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50-100		6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50-100	150-250	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	50-100	250-350	6.37
DV Tool		Tool Depth: 2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	50-100	600-850	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50-100	250-450	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder	7,015'	8,015'	14.5	1.21	50-100	150-250	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	TD	15.6	1.2	50-100	2000-3000	5.30

1. Final cement volumes will be determined by caliper. Also, due to the surface location not being staked, the cement
2. Surface casing shall have at least one centralizer installed on each of the bottom three joints starting with the shoe joint
3. Production casing will have one horizontal type centralizer on every joint for the first 1000' from TD, then every other joint to EOB, and then every third joint to KOP. Bowspring type centralizers will be run from KOP to intermediate casing

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	TD	OBM	10.0 - 13.5	50 - 70	5.0 - 10

* The mud weights will range depending on the targeted formation. The Wolfcamp A pore pressure will not exceed 9.5 ppg, but due to wellbore stability, the mud program will exceed the pore pressure. A closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions

7. TESTING, LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

- Drill stem tests are not planned.
- The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

- Conventional whole core samples are not planned.
- A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

- There is a pressure ramp that will be seen in the Wolfcamp A formation expected. Estimated BHP is: 4218 psi
- Hydrogen sulfide gas is not anticipated. An H₂S Contingency plan will be attached with this MPD in the event that H₂S is encountered

Eddy County, NM

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

The formation tops are just an overview of the area TVD and are subjected to change

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9014	
Lateral TVD Wolfcamp A		9014	14,014'-22,000'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9014

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements. Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the testing and specification documents.

Chevron requests a variance to use a FMC Technologies UH-2 Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

4. CASING PROGRAM

- a. The proposed casing program will be as follows: The proposed casing program will be as follows: The ranges of the production casing will range from 5000' -10,000' laterals. The targeted formations will be the Wolfcamp A. The casing loads were based on the worst case senerio (10,000' lateral)

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	TXP	New
Production	0'	14,014'-22,000'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

- b. Casing design subject to revision based on geologic conditions encountered.
- c. ***A "Worst Case" casing design for wells in a particular area is used below to calculate the Casing Safety Factors. If for any reason the casing design for a particular well requires setting casing deeper than the following "worst case" design, then the Casing Safety Factors will be recalculated & sent to the BLM prior to drilling.
- d. Chevron will fill casing at a minimum of every 20 jts (840') while running for intermediate and production casing in order to maintain collapse SF.

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9015'
Production Casing: 14,014'-22,000' MD/9,014' TVD (5,000'-10,000' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	2.9	1.34	1.79	2.22
Production	1.26	1.66	2.54	1.31

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50-100		6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50-100	150-250	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	50-100	250-350	6.37
DV Tool		Tool Depth: 2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	50-100	600-850	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50-100	250-450	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder	7,015'	8,015'	14.5	1.21	50-100	150-250	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	TD	15.6	1.2	50-100	2000-3000	5.30

1. Final cement volumes will be determined by caliper. Also, due to the surface location not being staked, the cement
2. Surface casing shall have at least one centralizer installed on each of the bottom three joints starting with the shoe joint
3. Production casing will have one horizontal type centralizer on every joint for the first 1000' from TD, then every other joint to EOB, and then every third joint to KOP. Bowspring type centralizers will be run from KOP to intermediate casing

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	TD	OBM	10.0 - 13.5	50 - 70	5.0 - 10

* The mud weights will range depending on the targeted formation. The Wolfcamp A pore pressure will not exceed 9.5 ppg, but due to wellbore stability, the mud program will exceed the pore pressure. A closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable: density, viscosity, gel strength, filtration, and pH.

Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions

7. TESTING, LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

- Drill stem tests are not planned.
- The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

- Conventional whole core samples are not planned.
- A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

- There is a pressure ramp that will be seen in the Wolfcamp A formation expected. Estimated BHP is: 4218 psi
- Hydrogen sulfide gas is not anticipated. An H2S Contingency plan will be attached with this MPD in the event that H2S is encountered

Eddy County, NM

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

The formation tops are just an overview of the area TVD and are subjected to change

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9014	
Lateral TVD Wolfcamp A		9014	14,014'-22,000'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9014

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements. Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the testing and specification documents.

Chevron requests a variance to use a FMC Technologies UH-2 Multibowl wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

4. CASING PROGRAM

- a. The proposed casing program will be as follows: The proposed casing program will be as follows: The ranges of the production casing will range from 5000' -10,000' laterals. The targeted formations will be the Wolfcamp A. The casing loads were based on the worst case senerio (10,000' lateral)

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	TXP	New
Production	0'	14,014'-22,000'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

- b. Casing design subject to revision based on geologic conditions encountered.
- c. ***A "Worst Case" casing design for wells in a particular area is used below to calculate the Casing Safety Factors. If for any reason the casing design for a particular well requires setting casing deeper than the following "worst case" design, then the Casing Safety Factors will be recalculated & sent to the BLM prior to drilling.
- d. Chevron will fill casing at a minimum of every 20 jts (840') while running for intermediate and production casing in order to maintain collapse SF.

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'
Intermediate Casing: 9015'
Production Casing: 14,014'-22,000' MD/9,014' TVD (5,000'-10,000' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	2.9	1.34	1.79	2.22
Production	1.26	1.66	2.54	1.31

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50-100		6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50-100	150-250	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	50-100	250-350	6.37
DV Tool		Tool Depth: 2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	50-100	600-850	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50-100	250-450	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, Retarder	7,015'	8,015'	14.5	1.21	50-100	150-250	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	TD	15.6	1.2	50-100	2000-3000	5.30

1. Final cement volumes will be determined by caliper. Also, due to the surface location not being staked, the cement
2. Surface casing shall have at least one centralizer installed on each of the bottom three joints starting with the shoe joint
3. Production casing will have one horizontal type centralizer on every joint for the first 1000' from TD, then every other joint to EOB, and then every third joint to KOP. Bowspring type centralizers will be run from KOP to intermediate casing

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	TD	OBM	10.0 - 13.5	50 - 70	5.0 - 10

* The mud weights will range depending on the targeted formation. The Wolfcamp A pore pressure will not exceed 9.5 ppg, but due to wellbore stability, the mud program will exceed the pore pressure. A closed system will be utilized consisting of above ground steel tanks. All wastes accumulated during drilling operations will be contained in a portable trash cage and removed from location and deposited in an approved sanitary landfill. Sanitary wastes will be contained in a chemical porta-toilet and then hauled to an approved sanitary landfill.

All fluids and cuttings will be disposed of in accordance with New Mexico Oil Conservation Division rules and regulations.

A mud test shall be performed every 24 hours after mudding up to determine, as applicable, density, viscosity, gel strength, filtration, and pH.

Visual mud monitoring equipment shall be in place to detect volume changes indicating loss or gain of circulating fluid volume. When abnormal pressures are anticipated -- a pit volume totalizer (PVT), stroke counter, and flow sensor will be used to detect volume changes indicating loss or gain of circulating fluid volume.

A weighting agent and lost circulating material (LCM) will be onsite to mitigate pressure or lost circulation as hole conditions

7. TESTING, LOGGING, AND CORING

The anticipated type and amount of testing, logging, and coring are as follows:

- Drill stem tests are not planned.
- The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

- Conventional whole core samples are not planned.
- A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

- There is a pressure ramp that will be seen in the Wolfcamp A formation expected. Estimated BHP is: 4218 psi
- Hydrogen sulfide gas is not anticipated. An H2S Contingency plan will be attached with this MPD in the event that H2S is encountered

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9342	
Wolfcamp C		9890	
Lateral TVD Wolfcamp C		9890	17537.40'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9342
Oil/Gas	Wolfcamp C	9890

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

PLEASE REFERENCE MDP

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	TXP	New
Production	0'	17,537'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'

Intermediate Casing: 9015'

Production Casing: 17537.40' MD/9.890' TVD (7,500' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			

100k lb overpull

X

X

X

ONSHORE ORDER NO. 1
 Chevron
 HayHurst CE 35 02 FED 64
 Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
 DRILLING PLAN
 PAGE: 3

5. CEMENTING PROGRAM

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50	389	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	17,537'	15.6	1.2	50	2723	5.30

ONSHORE ORDER NO. 1
Chevron
HayHurst CE 35 02 FED 64
Eddy County, NM

CONFIDENTIAL -- TIGHT HOLE
DRILLING PLAN
PAGE: 4

6. **MUD PROGRAM**

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 - 70	5.0 - 10
9015'	17,537'	OBM	10.0 - 13.5	50 - 70	5.0 - 10

7. **TESTING, LOGGING, AND CORING**

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

8. **ABNORMAL PRESSURES AND HYDROGEN SULFIDE**

PLEASE REFERENCE MDP

1. FORMATION TOPS

The estimated tops of important geologic markers are as follows:

FORMATION	SUB-SEA TVD	KBTVD	MD
Castille		505	
Lamar		2395	
Bell		2310	
Cherry		3208	
Brushy		4450	
Bone Spring/Avalon		6299	
First Bone Spring Sand		6888	
First Bone Spring Shale		6914	
Second Bone Spring Sand		7621	
Harkey Sand		8123	
Third Bone Spring Sand		8617	
Wolfcamp A		9342	
Wolfcamp C		9890	
Lateral TVD Wolfcamp C		9890	17537.40'

2. ESTIMATED DEPTH OF WATER, OIL, GAS & OTHER MINERAL BEARING FORMATIONS

The estimated depths at which the top and bottom of the anticipated water, oil, gas, or other mineral bearing formations are expected to be encountered are as follows:

Substance	Formation	Depth
Deepest Expected Base of Fresh Water		450
Water	Castille	505
Water	Cherry Canyon	3208
Oil/Gas	Brushy Canyon	4450
Oil/Gas	Bone Spring Limestone	6888
Oil/Gas	First Bone Spring Shale	6914
Oil/Gas	Second Bone Spring Sand	7621
Oil/Gas	Harkey Sand	8123
Oil/Gas	Wolfcamp A	9342
Oil/Gas	Wolfcamp C	9890

All shows of fresh water and minerals will be reported and protected.

3. BOP EQUIPMENT

Will have a minimum of a 5000 psi rig stack (see proposed schematic) for drill out below surface casing. Stack will be tested as specified in the attached testing requirements. Chevron requests a variance to use a CoFlex hose with a metal protective covering that will be utilized between the BOP and Choke manifold. Please refer to the testing and specification documents.

Chevron requests a variance to use a FMC Technologies conventional wellhead, which will be run through the rig floor on surface casing. BOPE will be nipped up and tested after cementing surface casing. Subsequent tests will be performed as needed, not to exceed 30 days. The field report from FMC Technologies and BOP test information will be provided in a subsequent report at the end of the well. Please see the attached wellhead schematic. An installation manual has been placed on file with the BLM office and remains unchanged from previous submittal.

4. CASING PROGRAM

Purpose	From	To	Hole Size	Csg Size	Weight	Grade	Thread	Condition
Surface	0'	450'	17-1/2"	13-3/8"	54.5 #	K-55	STC	New
Intermediate	0'	9,015'	12-1/4"	9-5/8"	40.0 #	L-80	LTC	New
Production	0'	17,537'	8-1/2"	5-1/2"	20.0 #	P-110	TXP	New

SF Calculations based on the following "Worst Case" casing design:

Surface Casing: 450'

Intermediate Casing: 9015'

Production Casing: 17537.40' MD/9,890' TVD (7,500' VS @ 90 deg inc)

Casing String	Min SF Burst	Min SF Collapse	Min SF Tension	Min SF Tri-Axial
Surface	1.82	5.11	3.97	2.31
Intermediate	1.45	1.32	1.78	1.84
Production	1.26	1.5	2.43	1.35

Min SF is the smallest of a group of safety factors that include the following considerations:

	Surf	Int	Prod
Burst Design			
Pressure Test- Surface, Int, Prod Csg P external: Water P internal: Test psi + next section heaviest mud in csg	X	X	X
Displace to Gas- Surf Csg P external: Water P internal: Dry Gas from Next Csg Point	X		
Frac at Shoe, Gas to Surf- Int Csg P external: Water P internal: Dry Gas, 15 ppg Frac Gradient		X	
Stimulation (Frac) Pressures- Prod Csg P external: Water P internal: Max inj pressure w/ heaviest injected fluid			X
Tubing leak- Prod Csg (packer at KOP) P external: Water P internal: Leak just below surf, 8.7 ppg packer fluid			X
Collapse Design			
Full Evacuation P external: Water gradient in cement, mud above TOC P internal: none	X	X	X
Cementing- Surf, Int, Prod Csg P external: Wet cement P internal: water	X	X	X
Tension Design			
100k lb overpull	X	X	X

5. **CEMENTING PROGRAM**

Slurry	Type	Cement Top	Cement Bottom	Weight	Yield	%Excess	Sacks	Water
Surface				(ppg)	(sx/cu ft)	Open Hole		gal/sk
Tail	Class C	0'	450'	14.8	1.33	50	356	6.37
Intermediate								
Stage 2 Lead	50:50 Poz: Class C + Antifoam, Extender, Salt, Retarder	0'	1,100'	11.9	2.43	50	213	14.21
Stage 2 Tail	Class C + Antifoam, Retarder, Viscosifier	1,100'	2,100'	14.8	1.33	0	235	6.37
DV TOOL		2,100'						
Stage 1 Lead	50:50 Poz: Class H + Extender, Antifoam, Retarder, Salt, Viscosifier	2,100'	8,015'	11.9	2.43	100	1524	13.76
Stage 1 Tail	Class H + Retarder, Extender, Dispersant	8,015'	9,015'	15.6	1.21	50	389	5.54
Production								
Lead	50:50 Poz: Class H + Extender, Antifoam, Dispersant, , Retarder	7,015'	8,015'	14.5	1.21	100	430	5.54
Tail	Class H + Viscosifier, Antifoam, Dispersant, Fluid Loss, Retarder, Expanding Agent	8,015'	17,537'	15.6	1.2	50	2723	5.30

6. MUD PROGRAM

From	To	Type	Weight	F. Vis	Filtrate
0'	450'	Spud Mud	8.3 - 8.7	32 - 34	NC - NC
450'	9015'	OBM	9.0 - 9.5	50 -70	5.0 - 10
9015'	17,388'	OBM	10.0 - 12	50 -70	5.0 - 10

* The mud weights will range depending on the targeted formation. The Wolfcamp C pore pressure will not exceed 12 ppg, but due to wellbore stability, the mud program will exceed the pore pressure.

7. TESTING, LOGGING, AND CORING

- a. Drill stem tests are not planned.
- b. The logging program will be as follows:

TYPE	Logs	Interval	Timing	Vendor
Mudlogs	2 man mudlog	Int Csg to TD	Drillout of Int Csg	TBD
LWD	MWD Gamma	Int. and Prod. Hole	While Drilling	TBD

- c. Conventional whole core samples are not planned.
- d. A Directional Survey will be run.

8. ABNORMAL PRESSURES AND HYDROGEN SULFIDE

- a. There is a pressure ramp that will be seen in the Wolfcamp A formation expected. Estimated BHP is:
6171 psi

For the latest performance data, always visit our website: www.tenaris.com

February 08 2017



Connection: TenarisXP® BTC
Casing/Tubing: CAS
Coupling Option: REGULAR

Size: 9.625 in.
Wall: 0.435 in.
Weight: 43.50 lbs/ft
Grade: L80.1
Min. Wall Thickness: 87.5 %

PIPE BODY DATA					
GEOMETRY					
Nominal OD	9.625 in.	Nominal Weight	43.50 lbs/ft	Standard Drift Diameter	8.599 in.
Nominal ID	8.755 in.	Wall Thickness	0.435 in.	Special Drift Diameter	N/A
Plain End Weight	42.73 lbs/ft				
PERFORMANCE					
Body Yield Strength	1005 x 1000 lbs	Internal Yield	6330 psi	SMYS	80000 psi
Collapse	3810 psi				
TENARISXP® BTC CONNECTION DATA					
GEOMETRY					
Connection OD	10.625 in.	Coupling Length	10.825 in.	Connection ID	8.743 in.
Critical Section Area	12.559 sq. in.	Threads per in.	5.00	Make-Up Loss	4.891 in.
PERFORMANCE					
Tension Efficiency	100 %	Joint Yield Strength	1005 x 1000 lbs	Internal Pressure Capacity ⁽¹⁾	6330 psi
Structural Compression Efficiency	100 %	Structural Compression Strength	1005 x 1000 lbs	Structural Bending ⁽²⁾	38 °/100 ft
External Pressure Capacity	3810 psi				
ESTIMATED MAKE-UP TORQUES ⁽²⁾					
Minimum	20240 ft-lbs	Optimum	22490 ft-lbs	Maximum	24740 ft-lbs
OPERATIONAL LIMIT TORQUES					
Operating Torque	ASK	Yield Torque	45900 ft-lbs		

BLANKING DIMENSIONS

Blanking Dimensions

- (1) Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per section 10.3 API 5C3 / ISO 10400 - 2007
- (2) Structural rating, pure bending to yield (i.e no other loads applied)
- (3) Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at licensees@oilfield.tenaris.com. Torque values may be further reviewed. For additional information, please contact us at contact-tenarishydril@tenaris.com

For the latest performance data, always visit our website: www.tenaris.com

July 07 2015



Connection: TenarisXP™ BTC
Casing/Tubing: CAS
Coupling Option: REGULAR

Size: 5.500 in.
Wall: 0.361 in.
Weight: 20.00 lbs/ft
Grade: P110
Min. Wall Thickness: 87.5 %

PIPE BODY DATA			
GEOMETRY			
Nominal OD	5.500 in.	Nominal Weight	20.00 lbs/ft
Nominal ID	4.778 in.	Wall Thickness	0.361 in.
Plain End Weight	19.83 lbs/ft	Standard Drift Diameter	4.653 in.
		Special Drift Diameter	N/A
PERFORMANCE			
Body Yield Strength	641 x 1000 lbs	Internal Yield	12630 psi
Collapse	11100 psi	SMYS	110000 psi
TENARISXP™ BTC CONNECTION DATA			
GEOMETRY			
Connection OD	6.100 in.	Coupling Length	9.450 in.
Critical Section Area	5.828 sq. in.	Threads per in.	5.00
		Connection ID	4.766 in.
		Make-Up Loss	4.204 in.
PERFORMANCE			
Tension Efficiency	100 %	Joint Yield Strength	641 x 1000 lbs
Structural Compression Efficiency	100 %	Structural Compression Strength	641 x 1000 lbs
External Pressure Capacity	11100 psi	Internal Pressure Capacity ⁽¹⁾	12630 psi
		Structural Bending ⁽²⁾	92 %/100 ft
ESTIMATED MAKE-UP TORQUES ⁽³⁾			
Minimum	11270 ft-lbs	Optimum	12520 ft-lbs
		Maximum	13770 ft-lbs
OPERATIONAL LIMIT TORQUES			
Operating Torque	21500 ft-lbs	Yield Torque	23900 ft-lbs

BLANKING DIMENSIONS

Blanking Dimensions

- (1) Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per section 10.3 API 5C3 / ISO 10400 - 2007.
- (2) Structural rating, pure bending to yield (i.e no other loads applied)
- (3) Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at licensees@oilfield.tenaris.com. Torque values may be further reviewed.
- For additional information, please contact us at contact-tenarishydril@tenaris.com



H₂S Preparedness and Contingency Plan Summary

Hayhurst Eddy County, New Mexico

Training

MCBU Drilling and Completions H₂S training requirements are intended to define the minimum level of training required for employees, contractors and visitors to enter or perform work at MCBU Drilling and Completions locations that have known concentrations of H₂S.

Awareness Level Training

Employees and visitors to MCBU Drilling and Completions locations that have known concentrations of H₂S, who are not required to perform work in H₂S areas, will be provided with an awareness level of H₂S training prior to entering any H₂S areas. At a minimum, awareness level training will include

1. Physical and chemical properties of H₂S
2. Health hazards of H₂S
3. Personal protective equipment
4. Information regarding potential sources of H₂S
5. Alarms and emergency evacuation procedures

Awareness level training will be developed and conducted by personnel who are qualified either by specific training, educational experience and/or work-related background.

Advanced Level H₂S Training

Employees and contractors required to work in areas that may contain H₂S will be provided with Advanced Level H₂S training prior to initial assignment. In addition to the Awareness Level requirements, Advanced Level H₂S training will include:

1. H₂S safe work practice procedures;
2. Emergency contingency plan procedures;
3. Methods to detect the presence or release of H₂S (e.g., alarms, monitoring equipment), including hands-on training with direct reading and personal monitoring H₂S equipment.
4. Basic overview of respiratory protective equipment suitable for use in H₂S environments. Note: Employees who work at sites that participate in the Chevron Respirator User program will require separate respirator training as required by the MCBU Respiratory Protection Program;
5. Basic overview of emergency rescue techniques, first aid, CPR and medical evaluation procedures. Employees who may be required to perform "standby" duties are required to receive additional first aid and CPR training, which is not covered in the Advanced Level H₂S training;
6. Proficiency examination covering all course material.

Advanced H₂S training courses will be instructed by personnel who have successfully completed an appropriate H₂S train-the-trainer development course (ANSI/ASSE Z390.1-2006) or who possess significant past experience through educational or work-related background.



H₂S Preparedness and Contingency Plan Summary

H₂S Training and Certification

All employees and visitors will be issued an H₂S training certification card (or certificate) upon successful completion of the appropriate H₂S training course. Personnel working in an H₂S environment will carry a current H₂S training certification card as proof of having received the proper training on their person at all times.

Briefing Areas

A minimum of two briefing areas will be established in locations that at least one area will be upwind from the well at all times. Upon recognition of an emergency situation, all personnel should assemble at the designated upwind briefing areas for instructions.

Emergency Equipment

Self-Contained Breathing Apparatus (SCBA)

- a) Six 30 minute SCBAs – 2 at each briefing area and 2 in the Safety Trailer.
- b) Eight 5 minute EBAs – 5 in the dog house at the rig floor, 1 at the accumulator, 1 at the shale shakers and 1 at the mud pits.

Emergency Alerting System

- a) One color code sign, displaying all possible conditions, will be placed at the entrance to the location with a flag displaying the current condition.
- b) Two windsocks will be on location, one on the dog house and one on the Drill Site Manager's Trailer.

H₂S Detection and Monitoring System

- a) H₂S monitoring system (sensor head, warning light and siren) placed throughout rig.
 - Drilling Rig Locations: at a minimum, in the area of the Shale shaker, rig floor, and bell nipple.
 - Workover Rig Locations: at a minimum, in the area of the Cellar, rig floor and circulating tanks or shale shaker.



H₂S Preparedness and Contingency Plan Summary

Well Control Equipment

- a) Flare Line 150' from wellhead with igniter.
- b) Choke manifold with a remotely operated choke.
- c) Mud / gas separator

Mud Program

In the event of drilling, completions, workover and well servicing operations involving a hydrogen sulfide concentration of 100 ppm or greater the following shall be considered:


- 1. Use of a degasser
- 2. Use of a zinc based mud treatment
- 3. Increasing mud weight

Public Safety - Emergency Assistance

<u>Agency</u>	<u>Telephone Number</u>
Eddy County Sheriff's Department	575-887-7551
Fire Department:	
Carlsbad	575-885-3125
Artesia	575-746-5050
Carlsbad Medical Center	575-887-4100
Eddy County Emergency Management	575-628-5450
Poison Control Center	800-222-1222



H₂S Preparedness and Contingency Plan Summary

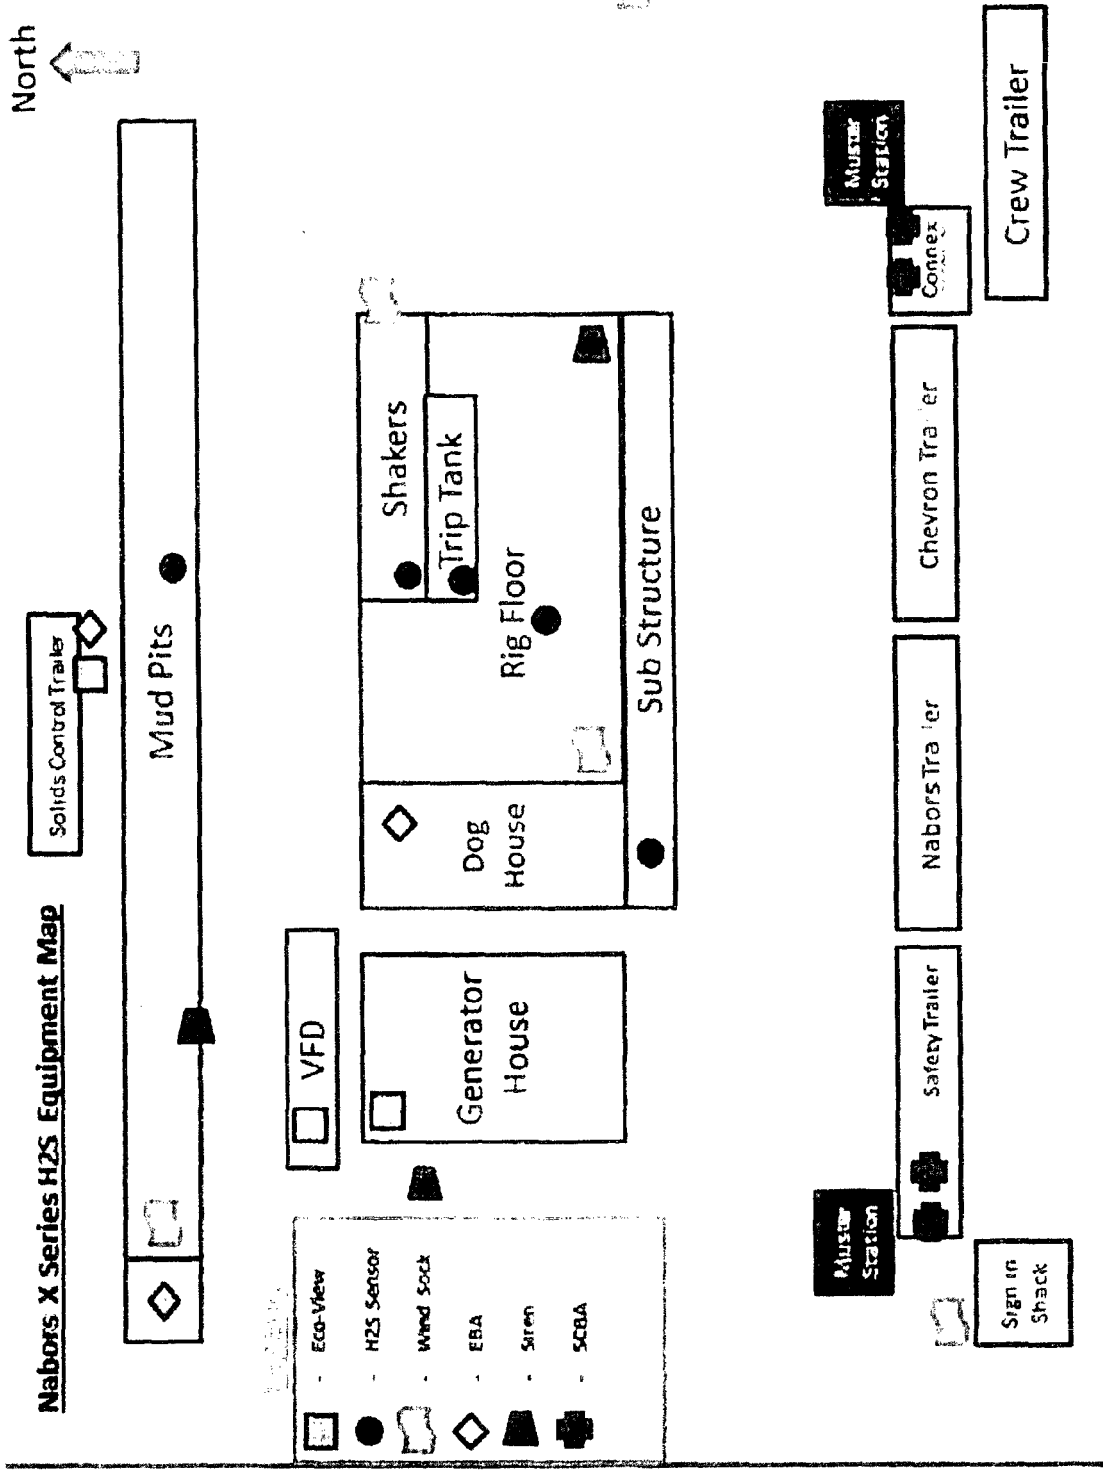



Chevron

Eddy County, NM (NAD27 NME)

HH CE 35 2 Fed

64

OH

Plan 1 12-19-16

Anticollision Report

20 December, 2016





Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Reference	Plan 1 12-19-16		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	MD Interval 100.00usft	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 10,000.00 usft	Error Surface:	Elliptical Conic
Warning Levels Evaluated at:	3.00 Sigma	Casing Method:	Not applied

Survey Tool Program Date 12/20/2016

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	17,537.40	Plan 1 12-19-16 (OH)	MWD+HDGM	OWSG Rev.2 MWD + HDGM

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offet Well - Wellbore - Design						
HH CE 35 2 Fed						
61 - OH - Plan 1 12-19-16	2,000.00	1,999.00	75.01	54.18	3.601	CC
61 - OH - Plan 1 12-19-16	9,807.50	9,753.30	107.53	3.72	1.036	Level 2. ES. SF
62 - OH - Plan 1 12-19-16	2,000.00	1,999.00	50.01	29.18	2.401	CC
62 - OH - Plan 1 12-19-16	2,100.00	2,098.09	50.87	28.99	2.325	ES, SF
63 - OH - Plan 1 12-19-16	2,000.00	2,000.00	25.02	4.18	1.201	Level 2. CC
63 - OH - Plan 1 12-19-16	2,100.00	2,099.67	25.61	3.72	1.170	Level 2. ES
63 - OH - Plan 1 12-19-16	9,606.04	9,597.65	107.24	5.38	1.053	Level 2. SF
65 - OH - Plan 1 12-19-16	2,146.42	2,146.75	24.02	1.64	1.073	Level 2. CC. ES. SF
66 - OH - Plan 1 12-19-16	2,156.32	2,157.77	49.36	26.87	2.195	CC
66 - OH - Plan 1 12-19-16	9,113.06	9,120.67	106.32	9.41	1.097	Level 2. ES. SF

Offset Design HH CE 35 2 Fed - 61 - OH - Plan 1 12-19-16

Survey Program: 0-MWD+HDGM

Offset Site Error: 0.00 usft

Offset Well Error: 0.00 usft

Reference		Offset		Semi Major Axis		Highside Toolface (")	Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)			
0.00	0.00	0.00	1.00	0.00	0.00	0.76	75.00	1.00	75.01		
100.00	100.00	99.00	100.00	0.20	0.20	0.76	75.00	1.00	75.01	74.61	0.40 186.926
200.00	200.00	199.00	200.00	0.74	0.73	0.76	75.00	1.00	75.01	73.53	1.47 50.910
300.00	300.00	299.00	300.00	1.28	1.27	0.76	75.00	1.00	75.01	72.46	2.55 29.429
400.00	400.00	399.00	400.00	1.81	1.81	0.76	75.00	1.00	75.01	71.38	3.62 20.696
500.00	500.00	499.00	500.00	2.35	2.35	0.76	75.00	1.00	75.01	70.31	4.70 15.960
600.00	600.00	599.00	600.00	2.89	2.88	0.76	75.00	1.00	75.01	69.23	5.77 12.988
700.00	700.00	699.00	700.00	3.43	3.42	0.76	75.00	1.00	75.01	68.16	6.85 10.949
800.00	800.00	799.00	800.00	3.97	3.96	0.76	75.00	1.00	75.01	67.08	7.93 9.464
900.00	900.00	899.00	900.00	4.50	4.50	0.76	75.00	1.00	75.01	66.01	9.00 8.333
1,000.00	1,000.00	999.00	1,000.00	5.04	5.04	0.76	75.00	1.00	75.01	64.93	10.08 7.444
1,100.00	1,100.00	1,099.00	1,100.00	5.58	5.57	0.76	75.00	1.00	75.01	63.85	11.15 6.726
1,200.00	1,200.00	1,199.00	1,200.00	6.12	6.11	0.76	75.00	1.00	75.01	62.78	12.23 6.134
1,300.00	1,300.00	1,299.00	1,300.00	6.65	6.65	0.76	75.00	1.00	75.01	61.70	13.30 5.638
1,400.00	1,400.00	1,399.00	1,400.00	7.19	7.19	0.76	75.00	1.00	75.01	60.63	14.38 5.217
1,500.00	1,500.00	1,499.00	1,500.00	7.73	7.72	0.76	75.00	1.00	75.01	59.55	15.45 4.854
1,600.00	1,600.00	1,599.00	1,600.00	8.27	8.26	0.76	75.00	1.00	75.01	58.48	16.53 4.538

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 61 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-KWD+1IDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
1,700.00	1,700.00	1,699.00	1,700.00	8.80	8.80	0.76	75.00	1.00	75.01	57.40	17.60	4.261	
1,800.00	1,800.00	1,799.00	1,800.00	9.34	9.34	0.76	75.00	1.00	75.01	56.33	18.68	4.015	
1,900.00	1,900.00	1,899.00	1,900.00	9.88	9.87	0.76	75.00	1.00	75.01	55.25	19.76	3.797	
2,000.00	2,000.00	1,999.00	2,000.00	10.42	10.41	0.76	75.00	1.00	75.01	54.18	20.83	3.601 CC	
2,100.00	2,099.98	2,097.31	2,098.29	10.94	10.94	-89.57	76.07	2.26	76.09	54.21	21.88	3.478	
2,200.00	2,199.86	2,196.44	2,197.31	11.46	11.46	-90.47	79.06	5.77	79.10	56.18	22.92	3.451	
2,300.00	2,299.73	2,296.37	2,297.12	11.98	11.99	-91.42	82.32	9.60	82.39	58.42	23.97	3.437	
2,400.00	2,399.59	2,396.31	2,396.93	12.50	12.52	-92.30	85.58	13.43	85.70	60.68	25.02	3.425	
2,500.00	2,499.45	2,496.25	2,496.74	13.02	13.06	-93.12	88.84	17.26	89.02	62.95	26.08	3.414	
2,600.00	2,599.31	2,596.18	2,596.55	13.54	13.59	-93.87	92.10	21.09	92.37	65.23	27.13	3.404	
2,700.00	2,699.18	2,696.12	2,696.36	14.07	14.13	-94.58	95.37	24.92	95.72	67.53	28.19	3.395	
2,800.00	2,799.08	2,796.06	2,796.18	14.60	14.66	-94.71	98.63	28.75	99.01	69.76	29.26	3.384	
2,900.00	2,899.07	2,895.97	2,895.95	15.13	15.20	-3.01	101.89	32.58	102.08	71.75	30.32	3.366	
3,000.00	2,899.07	2,895.84	2,895.70	15.66	15.73	-0.84	105.15	36.41	105.21	73.82	31.39	3.351	
3,100.00	3,099.07	3,095.71	3,095.44	16.20	16.27	1.21	108.41	40.24	108.49	76.03	32.46	3.342	
3,200.00	3,199.07	3,195.59	3,195.19	16.73	16.81	3.14	111.67	44.07	111.90	78.37	33.54	3.337	
3,300.00	3,299.07	3,295.46	3,294.94	17.27	17.35	4.95	114.93	47.90	115.43	80.82	34.61	3.335	
3,400.00	3,399.07	3,395.33	3,394.68	17.80	17.88	6.65	118.19	51.73	119.07	83.39	35.68	3.337	
3,500.00	3,499.06	3,495.20	3,494.43	18.34	18.42	8.25	121.45	55.56	122.80	86.05	36.75	3.341	
3,600.00	3,599.08	3,595.08	3,594.18	18.88	18.96	9.75	124.71	59.38	126.63	88.81	37.82	3.348	
3,700.00	3,699.08	3,694.95	3,693.92	19.41	19.50	11.17	127.97	63.21	130.54	91.64	38.90	3.356	
3,800.00	3,799.08	3,794.82	3,793.67	19.95	20.04	12.50	131.22	67.04	134.52	94.55	39.97	3.366	
3,900.00	3,899.08	3,894.70	3,893.42	20.48	20.58	13.76	134.48	70.87	138.57	97.53	41.04	3.376	
4,000.00	3,999.08	3,994.57	3,993.16	21.02	21.12	14.94	137.74	74.70	142.69	100.57	42.11	3.388	
4,100.00	4,099.08	4,094.44	4,092.91	21.56	21.66	16.06	141.00	78.53	146.86	103.67	43.19	3.401	
4,200.00	4,199.08	4,194.32	4,192.66	22.09	22.20	17.11	144.26	82.36	151.08	106.82	44.26	3.414	
4,300.00	4,299.08	4,294.19	4,292.40	22.63	22.74	18.11	147.52	86.19	155.35	110.02	45.33	3.427	
4,400.00	4,399.08	4,394.06	4,392.15	23.17	23.28	19.05	150.78	90.01	159.67	113.26	46.41	3.441	
4,500.00	4,499.08	4,493.94	4,491.90	23.70	23.83	19.94	154.04	93.84	164.03	116.55	47.48	3.455	
4,600.00	4,599.08	4,593.81	4,591.64	24.24	24.37	20.79	157.30	97.67	168.42	119.87	48.55	3.469	
4,700.00	4,699.08	4,693.68	4,691.39	24.78	24.91	21.60	160.56	101.50	172.85	123.23	49.63	3.483	
4,800.00	4,799.08	4,793.56	4,791.13	25.31	25.45	22.36	163.82	105.33	177.32	126.62	50.70	3.497	
4,900.00	4,899.08	4,893.43	4,890.88	25.85	25.99	23.08	167.08	109.16	181.81	130.03	51.77	3.512	
5,000.00	4,999.08	4,993.30	4,990.63	26.39	26.53	23.78	170.34	112.99	186.33	133.48	52.85	3.526	
5,100.00	5,099.08	5,093.18	5,090.37	26.92	27.08	24.43	173.60	116.82	190.87	136.95	53.92	3.540	
5,200.00	5,199.08	5,193.05	5,190.12	27.46	27.62	25.06	176.86	120.64	195.44	140.45	55.00	3.554	
5,300.00	5,299.08	5,292.92	5,289.87	28.00	28.16	25.66	180.12	124.47	200.04	143.97	56.07	3.568	
5,400.00	5,399.08	5,392.79	5,389.61	28.53	28.70	26.23	183.38	128.30	204.65	147.51	57.14	3.581	
5,500.00	5,499.08	5,492.67	5,489.36	29.07	29.25	26.78	186.64	132.13	209.28	151.06	58.22	3.595	
5,600.00	5,599.08	5,592.54	5,589.11	29.61	29.79	27.30	189.90	135.96	213.93	154.64	59.29	3.608	
5,700.00	5,699.08	5,692.41	5,688.85	30.15	30.33	27.80	193.16	139.79	218.60	158.23	60.37	3.621	
5,800.00	5,799.08	5,792.29	5,788.60	30.68	30.87	28.28	196.42	143.62	223.28	161.84	61.44	3.634	
5,900.00	5,899.08	5,894.70	5,890.89	31.22	31.43	28.73	199.63	147.39	227.81	165.28	62.53	3.643	
6,000.00	5,999.08	6,002.75	5,998.92	31.76	32.01	28.92	201.00	149.00	229.64	165.99	63.64	3.608	
6,100.00	6,099.08	6,102.91	6,099.08	32.29	32.54	28.92	201.00	149.00	229.64	164.93	64.71	3.549	
6,200.00	6,199.08	6,202.91	6,199.08	32.83	33.07	28.92	201.00	149.00	229.64	163.86	65.78	3.491	
6,300.00	6,299.08	6,302.91	6,299.08	33.37	33.60	28.92	201.00	149.00	229.64	162.79	66.85	3.435	
6,400.00	6,399.08	6,402.91	6,399.08	33.91	34.13	28.92	201.00	149.00	229.64	161.72	67.92	3.381	
6,500.00	6,499.08	6,502.91	6,499.08	34.44	34.66	28.92	201.00	149.00	229.64	160.65	68.99	3.329	
6,600.00	6,599.08	6,602.91	6,599.08	34.98	35.19	28.92	201.00	149.00	229.64	159.58	70.06	3.278	
6,700.00	6,699.08	6,702.91	6,699.08	35.52	35.73	28.92	201.00	149.00	229.64	158.51	71.13	3.228	
6,800.00	6,799.08	6,802.91	6,799.08	36.05	36.26	28.92	201.00	149.00	229.64	157.44	72.20	3.181	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 61 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance				Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
6,900.00	6,899.08	6,902.91	6,899.08	36.59	36.79	28.92	201.00	149.00	229.64	156.37	73.27	3.134	
7,000.00	6,999.08	7,002.91	6,999.08	37.13	37.32	28.92	201.00	149.00	229.64	155.30	74.34	3.089	
7,100.00	7,099.08	7,102.91	7,099.08	37.67	37.85	28.92	201.00	149.00	229.64	154.23	75.41	3.045	
7,200.00	7,199.08	7,202.91	7,199.08	38.20	38.39	28.92	201.00	149.00	229.64	153.15	76.48	3.002	
7,300.00	7,299.08	7,302.91	7,299.08	38.74	38.92	28.92	201.00	149.00	229.64	152.08	77.56	2.961	
7,400.00	7,399.08	7,402.91	7,399.08	39.28	39.45	28.92	201.00	149.00	229.64	151.01	78.63	2.921	
7,500.00	7,499.08	7,502.91	7,499.08	39.81	39.98	28.92	201.00	149.00	229.64	149.94	79.70	2.881	
7,600.00	7,599.08	7,602.91	7,599.08	40.35	40.52	28.92	201.00	149.00	229.64	148.87	80.77	2.843	
7,700.00	7,699.08	7,702.91	7,699.08	40.89	41.05	28.92	201.00	149.00	229.64	147.80	81.84	2.806	
7,800.00	7,799.08	7,802.91	7,799.08	41.43	41.56	28.92	201.00	149.00	229.64	146.73	82.91	2.770	
7,900.00	7,899.08	7,902.91	7,899.08	41.96	42.12	28.92	201.00	149.00	229.64	145.66	83.98	2.734	
8,000.00	7,999.08	8,002.91	7,999.08	42.50	42.65	28.92	201.00	149.00	229.64	144.58	85.06	2.700	
8,100.00	8,099.08	8,102.91	8,099.08	43.04	43.18	28.92	201.00	149.00	229.64	143.51	86.13	2.666	
8,200.00	8,199.08	8,202.91	8,199.08	43.58	43.72	28.92	201.00	149.00	229.64	142.44	87.20	2.633	
8,300.00	8,299.08	8,302.91	8,299.08	44.11	44.25	28.92	201.00	149.00	229.64	141.37	88.27	2.602	
8,400.00	8,399.08	8,402.91	8,399.08	44.65	44.79	28.92	201.00	149.00	229.64	140.30	89.34	2.570	
8,500.00	8,499.08	8,502.91	8,499.08	45.19	45.32	28.92	201.00	149.00	229.64	139.22	90.42	2.540	
8,600.00	8,599.08	8,602.91	8,599.08	45.73	45.85	28.92	201.00	149.00	229.64	138.15	91.49	2.510	
8,700.00	8,699.08	8,702.91	8,699.08	46.26	46.39	28.92	201.00	149.00	229.64	137.08	92.56	2.481	
8,800.00	8,799.08	8,802.91	8,799.08	46.80	46.92	28.92	201.00	149.00	229.64	136.01	93.63	2.453	
8,900.00	8,899.08	8,902.91	8,899.08	47.34	47.46	28.92	201.00	149.00	229.64	134.93	94.71	2.425	
9,000.00	8,999.08	9,002.91	8,999.08	47.88	47.99	28.92	201.00	149.00	229.64	133.86	95.78	2.398	
9,100.00	9,099.08	9,102.91	9,099.08	48.41	48.52	28.92	201.00	149.00	229.64	132.79	96.85	2.371	
9,200.00	9,199.08	9,202.91	9,199.08	48.95	49.06	28.92	201.00	149.00	229.64	131.72	97.92	2.345	
9,300.00	9,299.08	9,302.91	9,299.08	49.49	49.59	28.92	201.00	149.00	229.64	130.64	99.00	2.320	
9,400.00	9,398.80	9,402.63	9,398.80	50.02	50.13	28.87	201.00	149.00	224.48	124.99	99.49	2.256	
9,500.00	9,496.03	9,499.86	9,496.03	50.54	50.65	33.01	201.00	149.00	204.74	106.48	98.26	2.084	
9,600.00	9,587.82	9,591.66	9,587.82	51.01	51.14	42.13	201.00	149.00	172.50	75.71	96.79	1.782	
9,700.00	9,671.39	9,676.26	9,672.42	51.48	51.59	59.90	200.95	149.00	134.12	35.26	98.86	1.357 Level 3	
9,800.00	9,744.19	9,749.18	9,745.08	51.93	51.94	88.15	195.38	148.90	107.71	3.96	103.75	1.038 Level 2	
9,807.50	9,749.15	9,753.30	9,749.16	51.96	51.96	90.01	194.79	148.89	107.53	3.72	103.81	1.036 Level 2, ES, SF	
9,900.00	9,804.01	9,791.20	9,786.44	52.37	52.14	104.51	187.99	148.76	135.85	33.68	102.18	1.330 Level 3	
10,000.00	9,849.04	9,810.31	9,805.04	52.81	52.23	102.59	183.63	148.68	209.77	106.88	102.89	2.039	
10,100.00	9,877.90	9,813.42	9,808.06	53.25	52.24	83.13	182.87	148.67	299.84	194.99	104.85	2.860	
10,200.00	9,889.72	9,800.00	9,795.02	53.70	52.18	52.29	186.06	148.73	394.00	306.54	87.46	4.505	
10,300.00	9,890.00	9,800.00	9,795.02	54.17	52.18	51.56	186.06	148.73	488.29	401.17	87.12	5.605	
10,400.00	9,890.00	9,781.97	9,777.40	54.71	52.10	48.95	189.88	148.80	583.25	498.29	84.95	6.865	
10,500.00	9,890.00	9,772.96	9,768.55	55.33	52.05	46.77	191.57	148.83	679.34	596.10	83.24	8.161	
10,600.00	9,890.00	9,765.26	9,760.97	56.03	52.02	45.02	192.91	148.85	776.22	694.26	81.96	9.471	
10,700.00	9,890.00	9,750.00	9,745.89	56.80	51.95	41.84	195.27	148.90	873.77	794.71	79.06	11.052	
10,800.00	9,890.00	9,750.00	9,745.89	57.64	51.95	41.84	195.27	148.90	971.54	891.78	79.76	12.181	
10,900.00	9,890.00	9,750.00	9,745.89	58.54	51.95	41.84	195.27	148.90	1,069.73	989.22	80.51	13.287	
11,000.00	9,890.00	9,750.00	9,745.89	59.50	51.95	41.84	195.27	148.90	1,168.22	1,086.91	81.31	14.367	
11,100.00	9,890.00	9,750.00	9,745.89	60.53	51.95	41.84	195.27	148.90	1,266.95	1,184.78	82.16	15.420	
11,200.00	9,890.00	9,750.00	9,745.89	61.61	51.95	41.84	195.27	148.90	1,365.86	1,282.80	83.06	16.444	
11,300.00	9,890.00	9,750.00	9,745.89	62.75	51.95	41.84	195.27	148.90	1,464.92	1,380.92	84.00	17.439	
11,400.00	9,890.00	9,729.34	9,725.40	63.94	51.85	38.06	197.81	148.94	1,563.59	1,483.14	80.46	19.434	
11,500.00	9,890.00	9,726.65	9,722.71	65.18	51.84	37.61	198.09	148.95	1,662.74	1,581.85	80.89	20.555	
11,600.00	9,890.00	9,724.18	9,720.26	66.46	51.82	37.21	198.33	148.95	1,761.97	1,680.56	81.41	21.643	
11,700.00	9,890.00	9,721.91	9,718.00	67.78	51.81	36.84	198.55	148.96	1,861.27	1,779.26	82.01	22.697	
11,800.00	9,890.00	9,719.82	9,715.92	69.15	51.80	36.51	198.74	148.96	1,960.63	1,877.96	82.67	23.718	
11,900.00	9,890.00	9,700.00	9,696.15	70.55	51.71	33.60	200.16	148.98	2,060.40	1,980.35	80.05	25.740	

CC - Min centre to center distance or convergent point. SF - min separation factor. ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 61 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
12,000.00	9,890.00	9,700.00	9,696.15	71.99	51.71	33.60	200.16	148.98	2,159.79	2,078.64	81.15	26.615	
12,100.00	9,890.00	9,700.00	9,696.15	73.46	51.71	33.60	200.16	148.98	2,259.23	2,176.96	82.27	27.460	
12,200.00	9,890.00	9,700.00	9,696.15	74.97	51.71	33.60	200.16	148.98	2,358.72	2,275.30	83.42	28.275	
12,300.00	9,890.00	9,700.00	9,696.15	76.50	51.71	33.60	200.16	148.98	2,458.25	2,373.66	84.59	29.061	
12,400.00	9,890.00	9,700.00	9,696.15	78.07	51.71	33.60	200.16	148.98	2,557.82	2,472.05	85.78	29.820	
12,500.00	9,890.00	9,700.00	9,696.15	79.66	51.71	33.60	200.16	148.98	2,657.42	2,570.44	86.98	30.552	
12,600.00	9,890.00	9,700.00	9,696.15	81.27	51.71	13.51	200.16	148.98	2,757.10	2,669.20	83.90	43.145	
12,700.00	9,890.00	9,700.00	9,696.15	82.92	51.71	-14.79	200.16	148.98	2,856.86	2,791.66	65.20	43.818	
12,800.00	9,890.00	9,700.00	9,696.15	84.59	51.71	-32.04	200.16	148.98	2,956.58	2,869.38	87.20	33.907	
12,900.00	9,890.00	9,700.00	9,696.15	86.28	51.71	-32.04	200.16	148.98	3,056.29	2,967.84	88.45	34.555	
13,000.00	9,890.00	9,700.00	9,696.15	87.99	51.71	-32.04	200.16	148.98	3,156.01	3,066.31	89.71	35.180	
13,100.00	9,890.00	9,700.00	9,696.15	89.73	51.71	-32.04	200.16	148.98	3,255.76	3,164.78	90.98	35.784	
13,200.00	9,890.00	9,700.00	9,696.15	91.48	51.71	-32.04	200.16	148.98	3,355.52	3,263.25	92.27	36.366	
13,300.00	9,890.00	9,700.00	9,696.15	93.25	51.71	-32.04	200.16	148.98	3,455.29	3,361.73	93.57	36.928	
13,400.00	9,890.00	9,700.00	9,696.15	95.04	51.71	-32.04	200.16	148.98	3,555.08	3,460.21	94.88	37.471	
13,500.00	9,890.00	9,700.00	9,696.15	96.84	51.71	-32.04	200.16	148.98	3,654.88	3,558.69	96.19	37.996	
13,600.00	9,890.00	9,700.00	9,696.15	98.66	51.71	-32.04	200.16	148.98	3,754.69	3,657.17	97.52	38.503	
13,700.00	9,890.00	9,700.00	9,696.15	100.49	51.71	-32.04	200.16	148.98	3,854.51	3,755.66	98.85	38.994	
13,800.00	9,890.00	9,700.00	9,696.15	102.33	51.71	-32.04	200.16	148.98	3,954.34	3,854.15	100.19	39.468	
13,900.00	9,890.00	9,700.00	9,696.15	104.19	51.71	-32.04	200.16	148.98	4,054.17	3,952.63	101.54	39.927	
14,000.00	9,890.00	9,700.00	9,696.15	106.05	51.71	-32.04	200.16	148.98	4,154.02	4,051.12	102.89	40.372	
14,100.00	9,890.00	9,700.00	9,696.15	107.93	51.71	-32.04	200.16	148.98	4,253.87	4,149.61	104.26	40.802	
14,200.00	9,890.00	9,700.00	9,696.15	109.82	51.71	-32.04	200.16	148.98	4,353.73	4,248.11	105.62	41.219	
14,300.00	9,890.00	9,700.00	9,696.15	111.72	51.71	-32.04	200.16	148.98	4,453.59	4,346.60	107.00	41.623	
14,400.00	9,890.00	9,700.00	9,696.15	113.63	51.71	-32.04	200.16	148.98	4,553.47	4,445.09	108.38	42.015	
14,500.00	9,890.00	9,700.00	9,696.15	115.55	51.71	-32.04	200.16	148.98	4,653.34	4,543.58	109.76	42.395	
14,600.00	9,890.00	9,700.00	9,696.15	117.48	51.71	-32.04	200.16	148.98	4,753.22	4,642.07	111.15	42.764	
14,700.00	9,890.00	9,700.00	9,696.15	119.41	51.71	-32.04	200.16	148.98	4,853.11	4,740.56	112.55	43.121	
14,800.00	9,890.00	9,700.00	9,696.15	121.36	51.71	-32.04	200.16	148.98	4,953.00	4,839.06	113.94	43.469	
14,900.00	9,890.00	9,700.00	9,696.15	123.31	51.71	-32.04	200.16	148.98	5,052.90	4,937.55	115.35	43.806	
15,000.00	9,890.00	9,700.00	9,696.15	125.27	51.71	-32.04	200.16	148.98	5,152.80	5,036.04	116.75	44.134	
15,100.00	9,890.00	9,700.00	9,696.15	127.23	51.71	-32.04	200.16	148.98	5,252.70	5,134.54	118.16	44.452	
15,200.00	9,890.00	9,700.00	9,696.15	129.20	51.71	-32.04	200.16	148.98	5,352.61	5,233.03	119.58	44.762	
15,300.00	9,890.00	9,700.00	9,696.15	131.18	51.71	-32.04	200.16	148.98	5,452.52	5,331.52	121.00	45.063	
15,400.00	9,890.00	9,700.00	9,696.15	133.16	51.71	-32.04	200.16	148.98	5,552.43	5,430.01	122.42	45.356	
15,500.00	9,890.00	9,700.00	9,696.15	135.15	51.71	-32.04	200.16	148.98	5,652.35	5,528.50	123.84	45.641	
15,600.00	9,890.00	9,700.00	9,696.15	137.15	51.71	-32.04	200.16	148.98	5,752.27	5,627.00	125.27	45.919	
15,700.00	9,890.00	9,700.00	9,696.15	139.15	51.71	-32.04	200.16	148.98	5,852.19	5,725.49	126.70	46.189	
15,800.00	9,890.00	9,700.00	9,696.15	141.15	51.71	-32.04	200.16	148.98	5,952.11	5,823.98	128.13	46.452	
15,900.00	9,890.00	9,700.00	9,696.15	143.16	51.71	-32.04	200.16	148.98	6,052.04	5,922.47	129.57	46.709	
16,000.00	9,890.00	9,700.00	9,696.15	145.17	51.71	-32.04	200.16	148.98	6,151.97	6,020.96	131.01	46.959	
16,100.00	9,890.00	9,700.00	9,696.15	147.19	51.71	-32.04	200.16	148.98	6,251.90	6,119.45	132.45	47.202	
16,200.00	9,890.00	9,700.00	9,696.15	149.21	51.71	-32.04	200.16	148.98	6,351.84	6,217.95	133.89	47.440	
16,300.00	9,890.00	9,700.00	9,696.15	151.24	51.71	-32.04	200.16	148.98	6,451.77	6,316.44	135.34	47.672	
16,400.00	9,890.00	9,700.00	9,696.15	153.27	51.71	-32.04	200.16	148.98	6,551.71	6,414.93	136.78	47.898	
16,500.00	9,890.00	9,700.00	9,696.15	155.31	51.71	-32.04	200.16	148.98	6,651.65	6,513.42	138.23	48.119	
16,600.00	9,890.00	9,700.00	9,696.15	157.34	51.71	-32.04	200.16	148.98	6,751.59	6,611.91	139.69	48.334	
16,700.00	9,890.00	9,700.00	9,696.15	159.38	51.71	-32.04	200.16	148.98	6,851.54	6,710.40	141.14	48.545	
16,800.00	9,890.00	9,700.00	9,696.15	161.43	51.71	-32.04	200.16	148.98	6,951.48	6,808.89	142.59	48.750	
16,900.00	9,890.00	9,700.00	9,696.15	163.48	51.71	-32.04	200.16	148.98	7,051.43	6,907.38	144.05	48.951	
17,000.00	9,890.00	9,685.57	9,681.73	165.53	51.63	-30.21	200.76	149.00	7,151.18	7,009.23	141.95	50.378	
17,100.00	9,890.00	9,685.36	9,681.52	167.58	51.63	-30.19	200.76	149.00	7,251.12	7,107.79	143.33	50.589	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 61 - OH - Plan 1 12-19-16												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
17,200.00	9,890.00	9,685.15	9,681.31	169.64	51.63	-30.16	200.77	149.00	7,351.07	7,206.35	144.72	50.796	
17,300.00	9,890.00	9,684.95	9,681.11	171.70	51.63	-30.14	200.77	149.00	7,451.02	7,304.91	146.10	50.998	
17,400.00	9,890.00	9,684.75	9,680.91	173.76	51.63	-30.11	200.78	149.00	7,550.96	7,403.47	147.49	51.196	
17,500.00	9,890.00	9,684.56	9,680.72	175.82	51.63	-30.09	200.79	149.00	7,650.91	7,502.03	148.88	51.390	
17,537.40	9,890.00	9,684.49	9,680.65	176.60	51.63	-30.08	200.79	149.00	7,688.30	7,538.90	149.40	51.461	



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 62 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	0.00	1.00	0.00	0.00	1.15	50.00	1.00	50.02				
100.00	100.00	99.00	100.00	0.20	0.20	1.15	50.00	1.00	50.01	49.61	0.40	124.631	
200.00	200.00	199.00	200.00	0.74	0.73	1.15	50.00	1.00	50.01	48.54	1.47	33.944	
300.00	300.00	299.00	300.00	1.28	1.27	1.15	50.00	1.00	50.01	47.46	2.55	19.622	
400.00	400.00	399.00	400.00	1.81	1.81	1.15	50.00	1.00	50.01	46.39	3.62	13.799	
500.00	500.00	499.00	500.00	2.35	2.35	1.15	50.00	1.00	50.01	45.31	4.70	10.641	
600.00	600.00	599.00	600.00	2.89	2.88	1.15	50.00	1.00	50.01	44.24	5.77	8.660	
700.00	700.00	699.00	700.00	3.43	3.42	1.15	50.00	1.00	50.01	43.16	6.85	7.300	
800.00	800.00	799.00	800.00	3.97	3.96	1.15	50.00	1.00	50.01	42.08	7.93	6.310	
900.00	900.00	899.00	900.00	4.50	4.50	1.15	50.00	1.00	50.01	41.01	9.00	5.556	
1,000.00	1,000.00	999.00	1,000.00	5.04	5.04	1.15	50.00	1.00	50.01	39.93	10.08	4.963	
1,100.00	1,100.00	1,099.00	1,100.00	5.58	5.57	1.15	50.00	1.00	50.01	38.86	11.15	4.484	
1,200.00	1,200.00	1,199.00	1,200.00	6.12	6.11	1.15	50.00	1.00	50.01	37.78	12.23	4.090	
1,300.00	1,300.00	1,299.00	1,300.00	6.65	6.65	1.15	50.00	1.00	50.01	36.71	13.30	3.759	
1,400.00	1,400.00	1,399.00	1,400.00	7.19	7.19	1.15	50.00	1.00	50.01	35.63	14.38	3.478	
1,500.00	1,500.00	1,499.00	1,500.00	7.73	7.72	1.15	50.00	1.00	50.01	34.56	15.45	3.236	
1,600.00	1,600.00	1,599.00	1,600.00	8.27	8.26	1.15	50.00	1.00	50.01	33.48	16.53	3.026	
1,700.00	1,700.00	1,699.00	1,700.00	8.80	8.80	1.15	50.00	1.00	50.01	32.41	17.60	2.841	
1,800.00	1,800.00	1,799.00	1,800.00	9.34	9.34	1.15	50.00	1.00	50.01	31.33	18.68	2.677	
1,900.00	1,900.00	1,899.00	1,900.00	9.88	9.87	1.15	50.00	1.00	50.01	30.25	19.76	2.531	
2,000.00	2,000.00	1,999.00	2,000.00	10.42	10.41	1.15	50.00	1.00	50.01	29.18	20.83	2.401 CC	
2,100.00	2,099.98	2,098.09	2,099.07	10.94	10.94	-92.45	50.81	-0.47	50.87	28.99	21.88	2.325 ES, SF	
2,200.00	2,199.86	2,196.55	2,197.40	11.46	11.46	-101.97	53.27	-4.89	54.54	31.63	22.91	2.380	
2,300.00	2,299.73	2,295.20	2,295.73	11.98	11.98	-112.20	57.08	-11.76	61.87	37.92	23.95	2.584	
2,400.00	2,399.59	2,394.35	2,394.54	12.50	12.51	-120.25	61.05	-18.90	71.00	46.02	24.99	2.842	
2,500.00	2,499.45	2,493.50	2,493.35	13.02	13.04	-126.38	65.01	-26.04	81.21	55.19	26.02	3.121	
2,600.00	2,599.31	2,592.64	2,592.16	13.54	13.57	-131.11	68.98	-33.18	92.13	65.07	27.06	3.404	
2,700.00	2,699.18	2,691.79	2,690.97	14.07	14.11	-134.83	72.94	-40.32	103.54	75.44	28.10	3.684	
2,800.00	2,799.08	2,791.05	2,789.90	14.60	14.64	-137.58	76.91	-47.47	114.58	85.41	29.17	3.929	
2,900.00	2,899.07	2,890.63	2,889.14	15.13	15.18	-48.86	80.89	-54.64	123.35	93.12	30.23	4.080	
3,000.00	2,999.07	2,990.29	2,988.46	15.66	15.72	-49.61	84.88	-61.82	131.42	100.12	31.30	4.199	
3,100.00	3,099.07	3,089.95	3,087.78	16.20	16.27	-50.28	88.86	-69.00	139.50	107.14	32.36	4.311	
3,200.00	3,199.07	3,189.61	3,187.10	16.73	16.81	-50.87	92.85	-76.18	147.61	114.18	33.43	4.415	
3,300.00	3,299.07	3,289.27	3,286.42	17.27	17.36	-51.40	96.83	-83.36	155.72	121.23	34.50	4.514	
3,400.00	3,399.07	3,388.93	3,385.74	17.80	17.90	-51.88	100.82	-90.53	163.85	128.29	35.57	4.607	
3,500.00	3,499.08	3,488.59	3,485.07	18.34	18.45	-52.31	104.80	-97.71	171.99	135.36	36.63	4.695	
3,600.00	3,599.08	3,588.25	3,584.39	18.88	19.00	-52.71	108.79	-104.89	180.14	142.44	37.70	4.778	
3,700.00	3,699.08	3,687.91	3,683.71	19.41	19.55	-53.07	112.77	-112.07	188.30	149.53	38.77	4.856	
3,800.00	3,799.08	3,787.57	3,783.03	19.95	20.09	-53.40	116.75	-119.25	196.46	156.62	39.84	4.931	
3,900.00	3,899.08	3,887.23	3,882.35	20.48	20.64	-53.70	120.74	-126.42	204.63	163.72	40.91	5.001	
4,000.00	3,999.08	3,986.89	3,981.67	21.02	21.19	-53.98	124.72	-133.60	212.81	170.82	41.99	5.069	
4,100.00	4,099.08	4,086.55	4,080.99	21.56	21.74	-54.24	128.71	-140.78	220.99	177.93	43.06	5.132	
4,200.00	4,199.08	4,186.21	4,180.32	22.09	22.30	-54.48	132.69	-147.96	229.17	185.04	44.13	5.193	
4,300.00	4,299.08	4,285.87	4,279.64	22.63	22.85	-54.71	136.68	-155.14	237.36	192.16	45.20	5.251	
4,400.00	4,399.08	4,385.53	4,378.96	23.17	23.40	-54.92	140.66	-162.31	245.55	199.28	46.28	5.306	
4,500.00	4,499.08	4,485.19	4,478.28	23.70	23.95	-55.11	144.65	-169.49	253.74	206.40	47.35	5.359	
4,600.00	4,599.08	4,584.85	4,577.60	24.24	24.50	-55.30	148.63	-176.67	261.94	213.52	48.42	5.410	
4,700.00	4,699.08	4,684.51	4,676.92	24.78	25.06	-55.47	152.62	-183.85	270.14	220.65	49.50	5.458	
4,800.00	4,799.08	4,784.17	4,776.24	25.31	25.61	-55.63	156.60	-191.03	278.34	227.77	50.57	5.504	
4,900.00	4,899.08	4,883.83	4,875.56	25.85	26.17	-55.78	160.59	-198.21	286.55	234.90	51.64	5.549	
5,000.00	4,999.08	4,983.49	4,974.89	26.39	26.72	-55.93	164.57	-205.38	294.75	242.03	52.72	5.591	
5,100.00	5,099.08	5,093.15	5,074.21	26.92	27.27	-56.06	168.56	-212.56	302.96	249.17	53.79	5.632	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 62 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
5,200.00	5,199.08	5,182.81	5,173.53	27.46	27.83	-56.19	172.54	-219.74	311.17	256.30	54.87	5.671	
5,300.00	5,299.08	5,282.47	5,272.85	28.00	28.38	-56.32	176.53	-226.92	319.38	263.44	55.94	5.709	
5,400.00	5,399.08	5,382.13	5,372.17	28.53	28.94	-56.43	180.51	-234.10	327.59	270.57	57.02	5.746	
5,500.00	5,499.08	5,481.79	5,471.49	29.07	29.49	-56.54	184.50	-241.27	335.80	277.71	58.09	5.781	
5,600.00	5,599.08	5,581.45	5,570.81	29.61	30.05	-56.65	188.48	-248.45	344.02	284.85	59.17	5.814	
5,700.00	5,699.08	5,681.11	5,670.14	30.15	30.60	-56.75	192.47	-255.63	352.23	291.99	60.24	5.847	
5,800.00	5,799.08	5,781.41	5,770.10	30.68	31.16	-56.85	196.48	-262.85	360.45	299.12	61.32	5.878	
5,900.00	5,899.08	5,895.70	5,884.16	31.22	31.79	-56.93	199.84	-268.92	366.50	304.03	62.47	5.867	
6,000.00	5,999.08	6,010.36	5,998.79	31.76	32.40	-56.95	201.00	-271.00	368.58	304.95	63.62	5.793	
6,100.00	6,099.08	6,110.64	6,099.08	32.29	32.92	-56.95	201.00	-271.00	368.58	303.89	64.69	5.698	
6,200.00	6,199.08	6,210.64	6,199.08	32.83	33.45	-56.95	201.00	-271.00	368.58	302.82	65.75	5.605	
6,300.00	6,299.08	6,310.64	6,299.08	33.37	33.97	-56.95	201.00	-271.00	368.58	301.76	66.82	5.516	
6,400.00	6,399.08	6,410.64	6,399.08	33.91	34.49	-56.95	201.00	-271.00	368.58	300.69	67.89	5.429	
6,500.00	6,499.08	6,510.64	6,499.08	34.44	35.02	-56.95	201.00	-271.00	368.58	299.62	68.95	5.345	
6,600.00	6,599.08	6,610.64	6,599.08	34.98	35.54	-56.95	201.00	-271.00	368.58	298.56	70.02	5.264	
6,700.00	6,699.08	6,710.64	6,699.08	35.52	36.07	-56.95	201.00	-271.00	368.58	297.49	71.09	5.185	
6,800.00	6,799.08	6,810.64	6,799.08	36.05	36.59	-56.95	201.00	-271.00	368.58	296.42	72.15	5.108	
6,900.00	6,899.08	6,910.64	6,899.08	36.59	37.12	-56.95	201.00	-271.00	368.58	295.36	73.22	5.034	
7,000.00	6,999.08	7,010.64	6,999.08	37.13	37.64	-56.95	201.00	-271.00	368.58	294.29	74.29	4.961	
7,100.00	7,099.08	7,110.64	7,099.08	37.67	38.17	-56.95	201.00	-271.00	368.58	293.22	75.36	4.891	
7,200.00	7,199.08	7,210.64	7,199.08	38.20	38.70	-56.95	201.00	-271.00	368.58	292.15	76.42	4.823	
7,300.00	7,299.08	7,310.64	7,299.08	38.74	39.22	-56.95	201.00	-271.00	368.58	291.08	77.49	4.756	
7,400.00	7,399.08	7,410.64	7,399.08	39.28	39.75	-56.95	201.00	-271.00	368.58	290.02	78.56	4.692	
7,500.00	7,499.08	7,510.64	7,499.08	39.81	40.28	-56.95	201.00	-271.00	368.58	288.95	79.63	4.629	
7,600.00	7,599.08	7,610.64	7,599.08	40.35	40.81	-56.95	201.00	-271.00	368.58	287.88	80.70	4.567	
7,700.00	7,699.08	7,710.64	7,699.08	40.89	41.33	-56.95	201.00	-271.00	368.58	286.81	81.77	4.508	
7,800.00	7,799.08	7,810.64	7,799.08	41.43	41.86	-56.95	201.00	-271.00	368.58	285.74	82.83	4.450	
7,900.00	7,899.08	7,910.64	7,899.08	41.96	42.39	-56.95	201.00	-271.00	368.58	284.67	83.90	4.393	
8,000.00	7,999.08	8,010.64	7,999.08	42.50	42.92	-56.95	201.00	-271.00	368.58	283.60	84.97	4.338	
8,100.00	8,099.08	8,110.64	8,099.08	43.04	43.45	-56.95	201.00	-271.00	368.58	282.53	86.04	4.284	
8,200.00	8,199.08	8,210.64	8,199.08	43.58	43.98	-56.95	201.00	-271.00	368.58	281.46	87.11	4.231	
8,300.00	8,299.08	8,310.64	8,299.08	44.11	44.51	-56.95	201.00	-271.00	368.58	280.39	88.18	4.180	
8,400.00	8,399.08	8,410.64	8,399.08	44.65	45.04	-56.95	201.00	-271.00	368.58	279.32	89.25	4.130	
8,500.00	8,499.08	8,510.64	8,499.08	45.19	45.57	-56.95	201.00	-271.00	368.58	278.25	90.32	4.081	
8,600.00	8,599.08	8,610.64	8,599.08	45.73	46.10	-56.95	201.00	-271.00	368.58	277.18	91.39	4.033	
8,700.00	8,699.08	8,710.64	8,699.08	46.26	46.63	-56.95	201.00	-271.00	368.58	276.11	92.46	3.986	
8,800.00	8,799.08	8,810.64	8,799.08	46.80	47.16	-56.95	201.00	-271.00	368.58	275.04	93.53	3.941	
8,900.00	8,899.08	8,910.64	8,899.08	47.34	47.69	-56.95	201.00	-271.00	368.58	273.97	94.60	3.896	
9,000.00	8,999.08	9,010.64	8,999.08	47.88	48.22	-56.95	201.00	-271.00	368.58	272.90	95.67	3.852	
9,100.00	9,099.08	9,110.64	9,099.08	48.41	48.75	-56.95	201.00	-271.00	368.58	271.83	96.75	3.810	
9,200.00	9,199.08	9,210.64	9,199.08	48.95	49.28	-56.95	201.00	-271.00	368.58	270.76	97.82	3.768	
9,300.00	9,299.08	9,310.64	9,299.08	49.49	49.81	-56.95	201.00	-271.00	368.58	269.69	98.89	3.727	
9,400.00	9,399.08	9,410.64	9,399.08	50.02	50.34	-58.99	201.00	-271.00	365.50	265.69	99.81	3.662	
9,500.00	9,499.08	9,507.60	9,496.03	50.54	50.86	-63.09	201.00	-271.00	354.20	253.92	100.27	3.532	
9,600.00	9,587.82	9,599.39	9,587.82	51.01	51.35	-70.21	201.00	-271.00	337.44	236.43	101.01	3.341	
9,700.00	9,671.39	9,682.96	9,671.39	51.48	51.79	-79.61	201.00	-271.00	320.79	218.34	102.45	3.131	
9,800.00	9,744.19	9,755.83	9,744.26	51.93	52.17	-89.47	200.93	-271.00	312.44	208.69	103.75	3.012	
9,805.80	9,748.03	9,759.60	9,748.03	51.95	52.19	-90.00	200.85	-271.00	312.41	208.62	103.79	3.010	
9,900.00	9,804.01	9,807.30	9,795.62	52.37	52.42	-96.27	197.79	-271.06	322.28	218.31	103.96	3.100	
10,000.00	9,849.04	9,834.44	9,822.53	52.81	52.55	-97.12	194.28	-271.12	357.30	253.01	104.29	3.426	
10,100.00	9,877.90	9,850.00	9,837.87	53.25	52.62	-92.92	191.70	-271.17	414.56	309.20	105.35	3.935	
10,200.00	9,889.72	9,850.00	9,837.87	53.70	52.62	-82.66	191.70	-271.17	486.05	380.71	105.34	4.614	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
10,300.00	9,890.00	9,831.96	9,820.07	54.17	52.54	-76.88	194.66	-271.12	565.81	461.63	104.19	5.431		
10,400.00	9,890.00	9,824.53	9,812.72	54.71	52.50	-75.08	195.71	-271.10	652.52	548.50	104.02	6.273		
10,500.00	9,890.00	9,818.28	9,806.52	55.33	52.47	-73.95	196.52	-271.08	742.68	638.54	104.13	7.132		
10,600.00	9,890.00	9,800.00	9,788.35	56.03	52.39	-70.70	198.51	-271.05	835.23	732.03	103.20	8.094		
10,700.00	9,890.00	9,800.00	9,788.35	56.80	52.39	-70.70	198.51	-271.05	928.93	825.00	103.94	8.937		
10,800.00	9,890.00	9,800.00	9,788.35	57.64	52.39	-70.70	198.51	-271.05	1,023.83	919.08	104.75	9.774		
10,900.00	9,890.00	9,800.00	9,788.35	58.54	52.39	-70.70	198.51	-271.05	1,119.62	1,014.00	105.62	10.600		
11,000.00	9,890.00	9,800.00	9,788.35	59.50	52.39	-70.70	198.51	-271.05	1,216.08	1,109.53	106.56	11.413		
11,100.00	9,890.00	9,800.00	9,788.35	60.53	52.39	-70.70	198.51	-271.05	1,313.08	1,205.53	107.55	12.209		
11,200.00	9,890.00	9,800.00	9,788.35	61.61	52.39	-70.70	198.51	-271.05	1,410.49	1,301.90	108.59	12.989		
11,300.00	9,890.00	9,800.00	9,788.35	62.75	52.39	-70.70	198.51	-271.05	1,508.24	1,398.55	109.69	13.750		
11,400.00	9,890.00	9,800.00	9,788.35	63.94	52.39	-70.70	198.51	-271.05	1,606.27	1,495.43	110.84	14.492		
11,500.00	9,890.00	9,800.00	9,788.35	65.18	52.39	-70.70	198.51	-271.05	1,704.53	1,592.49	112.04	15.214		
11,600.00	9,890.00	9,800.00	9,788.35	66.46	52.39	-70.70	198.51	-271.05	1,802.98	1,689.70	113.28	15.917		
11,700.00	9,890.00	9,800.00	9,788.35	67.78	52.39	-70.70	198.51	-271.05	1,901.59	1,787.03	114.56	16.600		
11,800.00	9,890.00	9,800.00	9,788.35	69.15	52.39	-70.70	198.51	-271.05	2,000.34	1,884.46	115.88	17.263		
11,900.00	9,890.00	9,780.32	9,768.73	70.55	52.29	-67.33	200.01	-271.02	2,098.78	1,983.70	115.08	18.238		
12,000.00	9,890.00	9,779.09	9,767.50	71.99	52.28	-67.12	200.08	-271.02	2,197.70	2,081.39	116.31	18.895		
12,100.00	9,890.00	9,777.95	9,766.36	73.46	52.28	-66.93	200.14	-271.02	2,296.71	2,179.14	117.58	19.534		
12,200.00	9,890.00	9,776.88	9,765.30	74.97	52.27	-66.75	200.20	-271.01	2,395.80	2,276.92	118.88	20.153		
12,300.00	9,890.00	9,775.88	9,764.30	76.50	52.27	-66.59	200.25	-271.01	2,494.96	2,374.74	120.22	20.753		
12,400.00	9,890.00	9,774.95	9,763.37	78.07	52.26	-66.43	200.30	-271.01	2,594.19	2,472.60	121.59	21.335		
12,500.00	9,890.00	9,774.08	9,762.50	79.66	52.26	-66.29	200.34	-271.01	2,693.47	2,570.47	122.99	21.900		
12,600.00	9,890.00	9,773.25	9,761.68	81.27	52.26	-71.02	200.38	-271.01	2,792.64	2,665.02	127.63	21.881		
12,700.00	9,890.00	9,772.48	9,760.90	82.92	52.25	-74.68	200.42	-271.01	2,891.43	2,760.31	131.12	22.053		
12,800.00	9,890.00	9,771.75	9,760.17	84.59	52.25	-76.51	200.45	-271.01	2,989.77	2,856.27	133.50	22.395		
12,900.00	9,890.00	9,750.00	9,738.43	86.28	52.14	-74.35	200.99	-271.00	3,088.54	2,954.49	134.05	23.040		
13,000.00	9,890.00	9,750.00	9,738.43	87.99	52.14	-74.35	200.99	-271.00	3,186.92	3,051.19	135.73	23.480		
13,100.00	9,890.00	9,750.00	9,738.43	89.73	52.14	-74.35	200.99	-271.00	3,285.40	3,147.98	137.42	23.907		
13,200.00	9,890.00	9,750.00	9,738.43	91.48	52.14	-74.35	200.99	-271.00	3,383.97	3,244.83	139.14	24.321		
13,300.00	9,890.00	9,750.00	9,738.43	93.25	52.14	-74.35	200.99	-271.00	3,482.62	3,341.76	140.86	24.723		
13,400.00	9,890.00	9,750.00	9,738.43	95.04	52.14	-74.35	200.99	-271.00	3,581.35	3,438.74	142.61	25.113		
13,500.00	9,890.00	9,750.00	9,738.43	96.84	52.14	-74.35	200.99	-271.00	3,680.14	3,535.77	144.37	25.491		
13,600.00	9,890.00	9,750.00	9,738.43	98.66	52.14	-74.35	200.99	-271.00	3,779.00	3,632.85	146.15	25.858		
13,700.00	9,890.00	9,750.00	9,738.43	100.49	52.14	-74.35	200.99	-271.00	3,877.92	3,729.98	147.93	26.214		
13,800.00	9,890.00	9,750.00	9,738.43	102.33	52.14	-74.35	200.99	-271.00	3,976.89	3,827.15	149.73	26.560		
13,900.00	9,890.00	9,750.00	9,738.43	104.19	52.14	-74.35	200.99	-271.00	4,075.91	3,924.36	151.55	26.895		
14,000.00	9,890.00	9,750.00	9,738.43	106.05	52.14	-74.35	200.99	-271.00	4,174.97	4,021.60	153.37	27.221		
14,100.00	9,890.00	9,750.00	9,738.43	107.93	52.14	-74.35	200.99	-271.00	4,274.09	4,118.88	155.21	27.538		
14,200.00	9,890.00	9,750.00	9,738.43	109.82	52.14	-74.35	200.99	-271.00	4,373.24	4,216.19	157.05	27.846		
14,300.00	9,890.00	9,750.00	9,738.43	111.72	52.14	-74.35	200.99	-271.00	4,472.43	4,313.52	158.91	28.145		
14,400.00	9,890.00	9,750.00	9,738.43	113.63	52.14	-74.35	200.99	-271.00	4,571.65	4,410.88	160.77	28.436		
14,500.00	9,890.00	9,750.00	9,738.43	115.55	52.14	-74.35	200.99	-271.00	4,670.91	4,508.27	162.64	28.719		
14,600.00	9,890.00	9,750.00	9,738.43	117.48	52.14	-74.35	200.99	-271.00	4,770.20	4,605.68	164.52	28.994		
14,700.00	9,890.00	9,750.00	9,738.43	119.41	52.14	-74.35	200.99	-271.00	4,869.52	4,703.10	166.41	29.262		
14,800.00	9,890.00	9,750.00	9,738.43	121.36	52.14	-74.35	200.99	-271.00	4,968.86	4,800.55	168.31	29.522		
14,900.00	9,890.00	9,750.00	9,738.43	123.31	52.14	-74.35	200.99	-271.00	5,068.23	4,898.02	170.21	29.776		
15,000.00	9,890.00	9,750.00	9,738.43	125.27	52.14	-74.35	200.99	-271.00	5,167.63	4,995.50	172.12	30.023		
15,100.00	9,890.00	9,750.00	9,738.43	127.23	52.14	-74.35	200.99	-271.00	5,267.05	5,093.01	174.04	30.263		
15,200.00	9,890.00	9,750.00	9,738.43	129.20	52.14	-74.35	200.99	-271.00	5,366.49	5,190.52	175.96	30.498		
15,300.00	9,890.00	9,750.00	9,738.43	131.18	52.14	-74.35	200.99	-271.00	5,465.95	5,288.05	177.89	30.726		
15,400.00	9,890.00	9,750.00	9,738.43	133.16	52.14	-74.35	200.99	-271.00	5,565.43	5,385.60	179.83	30.949		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 62 - OH - Plan 1 12-19-16												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance						
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
15,500.00	9,890.00	9,750.00	9,738.43	135.15	52.14	-74.35	200.99	-271.00	5,664.92	5,483.16	181.77	31.166	
15,600.00	9,890.00	9,750.00	9,738.43	137.15	52.14	-74.35	200.99	-271.00	5,764.44	5,580.72	183.71	31.377	
15,700.00	9,890.00	9,750.00	9,738.43	139.15	52.14	-74.35	200.99	-271.00	5,863.97	5,678.31	185.66	31.584	
15,800.00	9,890.00	9,750.00	9,738.43	141.15	52.14	-74.35	200.99	-271.00	5,963.52	5,775.90	187.62	31.785	
15,900.00	9,890.00	9,750.00	9,738.43	143.16	52.14	-74.35	200.99	-271.00	6,063.08	5,873.50	189.58	31.982	
16,000.00	9,890.00	9,750.00	9,738.43	145.17	52.14	-74.35	200.99	-271.00	6,162.66	5,971.11	191.54	32.174	
16,100.00	9,890.00	9,750.00	9,738.43	147.19	52.14	-74.35	200.99	-271.00	6,262.25	6,068.73	193.51	32.361	
16,200.00	9,890.00	9,750.00	9,738.43	149.21	52.14	-74.35	200.99	-271.00	6,361.85	6,166.37	195.48	32.544	
16,300.00	9,890.00	9,750.00	9,738.43	151.24	52.14	-74.35	200.99	-271.00	6,461.46	6,264.00	197.46	32.723	
16,400.00	9,890.00	9,750.00	9,738.43	153.27	52.14	-74.35	200.99	-271.00	6,561.09	6,361.65	199.44	32.898	
16,500.00	9,890.00	9,750.00	9,738.43	155.31	52.14	-74.35	200.99	-271.00	6,660.73	6,459.31	201.42	33.068	
16,600.00	9,890.00	9,750.00	9,738.43	157.34	52.14	-74.35	200.99	-271.00	6,760.38	6,556.97	203.41	33.235	
16,700.00	9,890.00	9,750.00	9,738.43	159.38	52.14	-74.35	200.99	-271.00	6,860.04	6,654.64	205.40	33.398	
16,800.00	9,890.00	9,750.00	9,738.43	161.43	52.14	-74.35	200.99	-271.00	6,959.71	6,752.31	207.39	33.558	
16,900.00	9,890.00	9,750.00	9,738.43	163.48	52.14	-74.35	200.99	-271.00	7,059.38	6,849.99	209.39	33.714	
17,000.00	9,890.00	9,750.00	9,738.43	165.53	52.14	-74.35	200.99	-271.00	7,159.07	6,947.68	211.39	33.867	
17,100.00	9,890.00	9,750.00	9,738.43	167.58	52.14	-74.35	200.99	-271.00	7,258.77	7,045.37	213.39	34.016	
17,200.00	9,890.00	9,750.00	9,738.43	169.64	52.14	-74.35	200.99	-271.00	7,358.47	7,143.07	215.40	34.162	
17,300.00	9,890.00	9,750.00	9,738.43	171.70	52.14	-74.35	200.99	-271.00	7,458.18	7,240.78	217.40	34.306	
17,400.00	9,890.00	9,750.00	9,738.43	173.76	52.14	-74.35	200.99	-271.00	7,557.90	7,338.49	219.41	34.446	
17,500.00	9,890.00	9,750.00	9,738.43	175.82	52.14	-74.35	200.99	-271.00	7,657.63	7,436.20	221.43	34.583	
17,537.40	9,890.00	9,750.00	9,738.43	176.60	52.14	-74.35	200.99	-271.00	7,694.93	7,472.75	222.18	34.634	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 63 - OH - Plan 1 12-19-16													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	2.29	25.00	1.00	25.02					
100.00	100.00	100.00	100.00	0.20	0.20	2.29	25.00	1.00	25.02	24.62	0.40	62.041		
200.00	200.00	200.00	200.00	0.74	0.74	2.29	25.00	1.00	25.02	23.54	1.48	16.920		
300.00	300.00	300.00	300.00	1.28	1.28	2.29	25.00	1.00	25.02	22.47	2.55	9.796		
400.00	400.00	400.00	400.00	1.81	1.81	2.29	25.00	1.00	25.02	21.39	3.63	6.893		
500.00	500.00	500.00	500.00	2.35	2.35	2.29	25.00	1.00	25.02	20.32	4.70	5.318		
600.00	600.00	600.00	600.00	2.89	2.89	2.29	25.00	1.00	25.02	19.24	5.78	4.328		
700.00	700.00	700.00	700.00	3.43	3.43	2.29	25.00	1.00	25.02	18.16	6.86	3.649		
800.00	800.00	800.00	800.00	3.97	3.97	2.29	25.00	1.00	25.02	17.09	7.93	3.155		
900.00	900.00	900.00	900.00	4.50	4.50	2.29	25.00	1.00	25.02	16.01	9.01	2.778		
1,000.00	1,000.00	1,000.00	1,000.00	5.04	5.04	2.29	25.00	1.00	25.02	14.94	10.08	2.482		
1,100.00	1,100.00	1,100.00	1,100.00	5.58	5.58	2.29	25.00	1.00	25.02	13.86	11.16	2.242		
1,200.00	1,200.00	1,200.00	1,200.00	6.12	6.12	2.29	25.00	1.00	25.02	12.79	12.23	2.045		
1,300.00	1,300.00	1,300.00	1,300.00	6.65	6.65	2.29	25.00	1.00	25.02	11.71	13.31	1.880		
1,400.00	1,400.00	1,400.00	1,400.00	7.19	7.19	2.29	25.00	1.00	25.02	10.64	14.38	1.739		
1,500.00	1,500.00	1,500.00	1,500.00	7.73	7.73	2.29	25.00	1.00	25.02	9.56	15.46	1.618		
1,600.00	1,600.00	1,600.00	1,600.00	8.27	8.27	2.29	25.00	1.00	25.02	8.49	16.53	1.513		
1,700.00	1,700.00	1,700.00	1,700.00	8.80	8.80	2.29	25.00	1.00	25.02	7.41	17.61	1.421	Level 3	
1,800.00	1,800.00	1,800.00	1,800.00	9.34	9.34	2.29	25.00	1.00	25.02	6.33	18.69	1.339	Level 3	
1,900.00	1,900.00	1,900.00	1,900.00	9.88	9.88	2.29	25.00	1.00	25.02	5.26	19.76	1.266	Level 3	
2,000.00	2,000.00	2,000.00	2,000.00	10.42	10.42	2.29	25.00	1.00	25.02	4.18	20.84	1.201	Level 2, CC	
2,100.00	2,099.98	2,099.67	2,099.65	10.94	10.95	-88.00	25.59	2.63	25.61	3.72	21.89	1.170	Level 2, ES	
2,200.00	2,199.86	2,199.48	2,199.35	11.46	11.47	-88.72	27.23	7.12	27.24	4.31	22.93	1.188	Level 2	
2,300.00	2,299.73	2,299.47	2,299.19	11.98	11.99	-89.43	29.02	12.04	29.02	5.06	23.97	1.211	Level 2	
2,400.00	2,399.59	2,399.45	2,399.04	12.50	12.52	-90.05	30.81	16.96	30.81	5.80	25.02	1.232	Level 2	
2,500.00	2,499.45	2,499.43	2,498.89	13.02	13.05	-90.60	32.60	21.87	32.60	6.54	26.07	1.251	Level 3	
2,600.00	2,599.31	2,599.42	2,598.73	13.54	13.58	-91.09	34.39	26.79	34.40	7.28	27.12	1.268	Level 3	
2,700.00	2,699.18	2,699.40	2,698.58	14.07	14.11	-91.54	36.18	31.71	36.19	8.02	28.18	1.285	Level 3	
2,800.00	2,799.08	2,799.38	2,798.42	14.60	14.64	-90.49	37.97	36.62	37.97	8.74	29.24	1.299	Level 3	
2,900.00	2,899.07	2,899.28	2,898.19	15.13	15.17	5.16	39.75	41.54	39.93	9.62	30.30	1.318	Level 3	
3,000.00	2,999.07	2,999.14	2,997.91	15.66	15.71	11.57	41.54	46.45	42.42	11.05	31.37	1.352	Level 3	
3,100.00	3,099.07	3,099.01	3,097.64	16.20	16.24	17.20	43.33	51.36	45.38	12.95	32.43	1.399	Level 3	
3,200.00	3,199.07	3,198.87	3,197.36	16.73	16.78	22.11	45.12	56.27	48.73	15.23	33.50	1.455	Level 3	
3,300.00	3,299.07	3,298.73	3,297.09	17.27	17.31	26.35	46.90	61.18	52.38	17.82	34.56	1.515		
3,400.00	3,399.07	3,398.60	3,396.82	17.80	17.85	30.03	48.69	66.09	56.29	20.66	35.63	1.580		
3,500.00	3,499.08	3,498.46	3,496.54	18.34	18.39	33.22	50.48	71.00	60.39	23.70	36.70	1.646		
3,600.00	3,599.08	3,598.32	3,596.27	18.88	18.93	36.00	52.27	75.92	64.66	26.90	37.76	1.712		
3,700.00	3,699.08	3,698.18	3,695.99	19.41	19.46	38.43	54.05	80.83	69.07	30.24	38.83	1.779		
3,800.00	3,799.08	3,798.05	3,795.72	19.95	20.00	40.56	55.84	85.74	73.58	33.68	39.90	1.844		
3,900.00	3,899.08	3,897.91	3,895.45	20.48	20.54	42.44	57.63	90.65	78.18	37.21	40.96	1.908		
4,000.00	3,999.08	3,997.77	3,995.17	21.02	21.08	44.12	59.41	95.56	82.85	40.82	42.03	1.971		
4,100.00	4,099.08	4,097.64	4,094.90	21.56	21.62	45.61	61.20	100.47	87.59	44.49	43.10	2.032		
4,200.00	4,199.08	4,197.50	4,194.63	22.09	22.16	46.95	62.99	105.38	92.39	48.22	44.17	2.092		
4,300.00	4,299.08	4,297.36	4,294.35	22.63	22.70	48.16	64.78	110.29	97.22	51.99	45.24	2.149		
4,400.00	4,399.08	4,397.23	4,394.08	23.17	23.24	49.25	66.56	115.20	102.10	55.79	46.31	2.205		
4,500.00	4,499.08	4,497.09	4,493.80	23.70	23.78	50.25	68.35	120.12	107.01	59.63	47.38	2.259		
4,600.00	4,599.08	4,596.95	4,593.53	24.24	24.33	51.15	70.14	125.03	111.95	63.50	48.45	2.311		
4,700.00	4,699.08	4,696.81	4,693.26	24.78	24.87	51.98	71.93	129.94	116.92	67.40	49.52	2.361		
4,800.00	4,799.08	4,796.68	4,792.98	25.31	25.41	52.74	73.71	134.85	121.91	71.31	50.59	2.410		
4,900.00	4,899.08	4,896.54	4,892.71	25.85	25.95	53.44	75.50	139.76	126.91	75.25	51.66	2.457		
5,000.00	4,999.08	4,998.09	4,994.13	26.39	26.50	54.07	77.23	144.52	131.71	78.96	52.74	2.497		
5,100.00	5,099.08	5,102.74	5,098.75	26.92	27.06	54.32	77.98	146.56	133.71	79.87	53.84	2.484		

CC - Min centre to center distance or convergent point. SF - min separation factor. ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 63 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N-S (usft)	+E-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
5,200.00	5,199.08	5,203.06	5,199.08	27.46	27.59	54.33	77.98	146.57	133.72	78.81	54.91	2.435	
5,300.00	5,299.08	5,303.06	5,299.08	28.00	28.12	54.33	77.98	146.57	133.72	77.74	55.97	2.389	
5,400.00	5,399.08	5,403.06	5,399.08	28.53	28.65	54.33	77.98	146.57	133.72	76.68	57.04	2.344	
5,500.00	5,499.08	5,503.06	5,499.08	29.07	29.18	54.33	77.98	146.57	133.72	75.61	58.11	2.301	
5,600.00	5,599.08	5,603.06	5,599.08	29.61	29.71	54.33	77.98	146.57	133.72	74.54	59.18	2.260	
5,700.00	5,699.08	5,703.06	5,699.08	30.15	30.24	54.33	77.98	146.57	133.72	73.47	60.25	2.220	
5,800.00	5,799.08	5,803.06	5,799.08	30.68	30.77	54.33	77.98	146.57	133.72	72.40	61.31	2.181	
5,900.00	5,899.08	5,903.06	5,899.08	31.22	31.30	54.33	77.98	146.57	133.72	71.33	62.38	2.143	
6,000.00	5,999.08	6,003.06	5,999.08	31.76	31.83	54.33	77.98	146.57	133.72	70.26	63.45	2.107	
6,100.00	6,099.08	6,103.06	6,099.08	32.29	32.36	54.33	77.98	146.57	133.72	69.20	64.52	2.072	
6,200.00	6,199.08	6,203.06	6,199.08	32.83	32.89	54.33	77.98	146.57	133.72	68.13	65.59	2.039	
6,300.00	6,299.08	6,303.06	6,299.08	33.37	33.42	54.33	77.98	146.57	133.72	67.06	66.66	2.006	
6,400.00	6,399.08	6,403.06	6,399.08	33.91	33.96	54.33	77.98	146.57	133.72	65.99	67.73	1.974	
6,500.00	6,499.08	6,503.06	6,499.08	34.44	34.49	54.33	77.98	146.57	133.72	64.92	68.80	1.944	
6,600.00	6,599.08	6,603.06	6,599.08	34.98	35.02	54.33	77.98	146.57	133.72	63.85	69.87	1.914	
6,700.00	6,699.08	6,703.06	6,699.08	35.52	35.55	54.33	77.98	146.57	133.72	62.78	70.94	1.885	
6,800.00	6,799.08	6,803.06	6,799.08	36.05	36.08	54.33	77.98	146.57	133.72	61.71	72.01	1.857	
6,900.00	6,899.08	6,903.06	6,899.08	36.59	36.62	54.33	77.98	146.57	133.72	60.64	73.08	1.830	
7,000.00	6,999.08	7,003.06	6,999.08	37.13	37.15	54.33	77.98	146.57	133.72	59.57	74.15	1.803	
7,100.00	7,099.08	7,103.06	7,099.08	37.67	37.68	54.33	77.98	146.57	133.72	58.49	75.22	1.778	
7,200.00	7,199.08	7,203.06	7,199.08	38.20	38.21	54.33	77.98	146.57	133.72	57.42	76.29	1.753	
7,300.00	7,299.08	7,303.06	7,299.08	38.74	38.75	54.33	77.98	146.57	133.72	56.35	77.36	1.728	
7,400.00	7,399.08	7,403.06	7,399.08	39.28	39.28	54.33	77.98	146.57	133.72	55.28	78.44	1.705	
7,500.00	7,499.08	7,503.06	7,499.08	39.81	39.81	54.33	77.98	146.57	133.72	54.21	79.51	1.682	
7,600.00	7,599.08	7,603.06	7,599.08	40.35	40.35	54.33	77.98	146.57	133.72	53.14	80.58	1.659	
7,700.00	7,699.08	7,703.06	7,699.08	40.89	40.88	54.33	77.98	146.57	133.72	52.07	81.65	1.638	
7,800.00	7,799.08	7,803.06	7,799.08	41.43	41.42	54.33	77.98	146.57	133.72	51.00	82.72	1.616	
7,900.00	7,899.08	7,903.06	7,899.08	41.96	41.95	54.33	77.98	146.57	133.72	49.92	83.79	1.596	
8,000.00	7,999.08	8,003.06	7,999.08	42.50	42.48	54.33	77.98	146.57	133.72	48.85	84.87	1.576	
8,100.00	8,099.08	8,103.06	8,099.08	43.04	43.02	54.33	77.98	146.57	133.72	47.78	85.94	1.556	
8,200.00	8,199.08	8,203.06	8,199.08	43.58	43.55	54.33	77.98	146.57	133.72	46.71	87.01	1.537	
8,300.00	8,299.08	8,303.06	8,299.08	44.11	44.08	54.33	77.98	146.57	133.72	45.64	88.08	1.518	
8,400.00	8,399.08	8,403.06	8,399.08	44.65	44.62	54.33	77.98	146.57	133.72	44.56	89.15	1.500 Level 3	
8,500.00	8,499.08	8,503.06	8,499.08	45.19	45.15	54.33	77.98	146.57	133.72	43.49	90.23	1.482 Level 3	
8,600.00	8,599.08	8,603.06	8,599.08	45.73	45.69	54.33	77.98	146.57	133.72	42.42	91.30	1.465 Level 3	
8,700.00	8,699.08	8,703.06	8,699.08	46.26	46.22	54.33	77.98	146.57	133.72	41.35	92.37	1.448 Level 3	
8,800.00	8,799.08	8,803.06	8,799.08	46.80	46.76	54.33	77.98	146.57	133.72	40.27	93.44	1.431 Level 3	
8,900.00	8,899.08	8,903.06	8,899.08	47.34	47.29	54.33	77.98	146.57	133.72	39.20	94.52	1.415 Level 3	
9,000.00	8,999.08	9,003.06	8,999.08	47.88	47.83	54.33	77.98	146.57	133.72	38.13	95.59	1.399 Level 3	
9,100.00	9,099.08	9,103.06	9,099.08	48.41	48.36	54.33	77.98	146.57	133.72	37.06	96.66	1.383 Level 3	
9,200.00	9,199.08	9,203.06	9,199.08	48.95	48.90	54.33	77.98	146.57	133.72	35.98	97.73	1.368 Level 3	
9,300.00	9,299.08	9,303.06	9,299.08	49.49	49.43	54.33	77.98	146.57	133.72	34.91	98.81	1.353 Level 3	
9,400.00	9,398.80	9,402.78	9,398.80	50.02	49.96	55.67	77.98	146.57	130.30	30.65	99.65	1.308 Level 3	
9,500.00	9,496.03	9,500.41	9,496.42	50.54	50.49	65.67	77.96	146.57	118.83	18.57	100.26	1.185 Level 2	
9,600.00	9,587.82	9,592.91	9,588.46	51.01	50.93	88.43	69.81	146.42	107.31	5.49	101.81	1.054 Level 2	
9,606.04	9,593.13	9,597.65	9,593.14	51.04	50.96	90.02	68.99	146.41	107.24	5.38	101.86	1.053 Level 2, SF	
9,700.00	9,671.39	9,658.43	9,652.27	51.48	51.24	110.37	55.12	146.16	127.21	26.85	100.36	1.268 Level 3	
9,800.00	9,744.19	9,700.00	9,691.73	51.93	51.43	118.81	42.06	145.92	189.47	92.42	97.05	1.952	
9,900.00	9,804.01	9,718.13	9,708.62	52.37	51.51	111.42	35.48	145.80	274.25	175.16	99.09	2.768	
10,000.00	9,849.04	9,723.08	9,713.19	52.81	51.53	87.04	33.59	145.76	367.98	263.83	104.15	3.533	
10,100.00	9,877.90	9,717.33	9,707.88	53.25	51.50	52.95	35.78	145.80	463.97	376.01	87.96	5.275	
10,200.00	9,889.72	9,700.00	9,691.73	53.70	51.43	30.52	42.06	145.92	558.45	495.15	63.30	8.822	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 63 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,300.00	9,890.00	9,700.00	9,691.73	54.17	51.43	31.92	42.06	145.92	651.10	585.93	65.17	9.991	
10,400.00	9,890.00	9,672.91	9,666.12	54.71	51.31	31.23	50.90	146.08	743.93	679.26	64.67	11.504	
10,500.00	9,890.00	9,650.00	9,644.17	55.33	51.20	28.85	57.42	146.20	838.21	775.94	62.27	13.460	
10,600.00	9,890.00	9,650.00	9,644.17	56.03	51.20	28.85	57.42	146.20	933.04	870.23	62.81	14.855	
10,700.00	9,890.00	9,650.00	9,644.17	56.80	51.20	28.85	57.42	146.20	1,028.84	965.44	63.40	16.228	
10,800.00	9,890.00	9,631.83	9,626.58	57.64	51.12	27.17	61.96	146.28	1,124.95	1,062.95	62.00	18.146	
10,900.00	9,890.00	9,624.33	9,619.28	58.54	51.08	26.53	63.68	146.31	1,221.63	1,159.74	61.89	19.737	
11,000.00	9,890.00	9,617.61	9,612.71	59.50	51.05	25.97	65.13	146.34	1,318.69	1,256.75	61.95	21.288	
11,100.00	9,890.00	9,600.00	9,595.44	60.53	50.97	24.61	68.57	146.40	1,416.23	1,355.18	61.06	23.196	
11,200.00	9,890.00	9,600.00	9,595.44	61.61	50.97	24.61	68.57	146.40	1,513.75	1,451.89	61.86	24.471	
11,300.00	9,890.00	9,600.00	9,595.44	62.75	50.97	24.61	68.57	146.40	1,611.58	1,548.88	62.70	25.704	
11,400.00	9,890.00	9,600.00	9,595.44	63.94	50.97	24.61	68.57	146.40	1,709.65	1,646.08	63.57	26.893	
11,500.00	9,890.00	9,600.00	9,595.44	65.18	50.97	24.61	68.57	146.40	1,807.94	1,743.46	64.48	28.040	
11,600.00	9,890.00	9,600.00	9,595.44	66.46	50.97	24.61	68.57	146.40	1,906.41	1,841.00	65.41	29.145	
11,700.00	9,890.00	9,600.00	9,595.44	67.78	50.97	24.61	68.57	146.40	2,005.02	1,938.65	66.37	30.208	
11,800.00	9,890.00	9,600.00	9,595.44	69.15	50.97	24.61	68.57	146.40	2,103.77	2,036.41	67.36	31.232	
11,900.00	9,890.00	9,578.48	9,574.21	70.55	50.86	23.10	72.06	146.46	2,202.12	2,135.63	66.50	33.116	
12,000.00	9,890.00	9,575.63	9,571.38	71.99	50.85	22.92	72.46	146.47	2,300.95	2,233.66	67.29	34.196	
12,100.00	9,890.00	9,572.96	9,568.74	73.46	50.84	22.75	72.82	146.48	2,399.85	2,331.74	68.11	35.233	
12,200.00	9,890.00	9,570.47	9,566.27	74.97	50.83	22.59	73.15	146.48	2,498.82	2,429.85	68.97	36.230	
12,300.00	9,890.00	9,550.00	9,545.93	76.50	50.73	21.36	75.44	146.52	2,598.22	2,529.71	68.51	37.925	
12,400.00	9,890.00	9,550.00	9,545.93	78.07	50.73	21.36	75.44	146.52	2,697.24	2,627.65	69.59	38.759	
12,500.00	9,890.00	9,550.00	9,545.93	79.66	50.73	21.36	75.44	146.52	2,796.33	2,725.65	70.68	39.562	
12,600.00	9,890.00	9,550.00	9,545.93	81.27	50.73	8.03	75.44	146.52	2,895.53	2,836.55	58.98	49.092	
12,700.00	9,890.00	9,550.00	9,545.93	82.92	50.73	-8.84	75.44	146.52	2,994.84	2,934.97	59.87	50.024	
12,800.00	9,890.00	9,550.00	9,545.93	84.59	50.73	-20.22	75.44	146.52	3,094.14	3,022.71	71.43	43.314	
12,900.00	9,890.00	9,550.00	9,545.93	86.28	50.73	-20.22	75.44	146.52	3,193.46	3,120.89	72.57	44.007	
13,000.00	9,890.00	9,550.00	9,545.93	87.99	50.73	-20.22	75.44	146.52	3,292.82	3,219.11	73.71	44.673	
13,100.00	9,890.00	9,550.00	9,545.93	89.73	50.73	-20.22	75.44	146.52	3,392.22	3,317.35	74.86	45.313	
13,200.00	9,890.00	9,550.00	9,545.93	91.48	50.73	-20.22	75.44	146.52	3,491.65	3,415.62	76.02	45.929	
13,300.00	9,890.00	9,550.00	9,545.93	93.25	50.73	-20.22	75.44	146.52	3,591.11	3,513.92	77.19	46.522	
13,400.00	9,890.00	9,550.00	9,545.93	95.04	50.73	-20.22	75.44	146.52	3,690.60	3,612.23	78.37	47.094	
13,500.00	9,890.00	9,550.00	9,545.93	96.84	50.73	-20.22	75.44	146.52	3,790.12	3,710.57	79.55	47.644	
13,600.00	9,890.00	9,550.00	9,545.93	98.66	50.73	-20.22	75.44	146.52	3,889.66	3,808.92	80.74	48.175	
13,700.00	9,890.00	9,550.00	9,545.93	100.49	50.73	-20.22	75.44	146.52	3,989.23	3,907.29	81.94	48.687	
13,800.00	9,890.00	9,550.00	9,545.93	102.33	50.73	-20.22	75.44	146.52	4,088.81	4,005.68	83.14	49.181	
13,900.00	9,890.00	9,550.00	9,545.93	104.19	50.73	-20.22	75.44	146.52	4,188.42	4,104.07	84.35	49.658	
14,000.00	9,890.00	9,550.00	9,545.93	106.05	50.73	-20.22	75.44	146.52	4,288.05	4,202.49	85.56	50.118	
14,100.00	9,890.00	9,550.00	9,545.93	107.93	50.73	-20.22	75.44	146.52	4,387.69	4,300.91	86.78	50.563	
14,200.00	9,890.00	9,550.00	9,545.93	109.82	50.73	-20.22	75.44	146.52	4,487.35	4,399.35	88.00	50.993	
14,300.00	9,890.00	9,550.00	9,545.93	111.72	50.73	-20.22	75.44	146.52	4,587.02	4,497.79	89.23	51.409	
14,400.00	9,890.00	9,550.00	9,545.93	113.63	50.73	-20.22	75.44	146.52	4,686.71	4,596.25	90.46	51.812	
14,500.00	9,890.00	9,550.00	9,545.93	115.55	50.73	-20.22	75.44	146.52	4,786.41	4,694.72	91.69	52.202	
14,600.00	9,890.00	9,550.00	9,545.93	117.48	50.73	-20.22	75.44	146.52	4,886.12	4,793.19	92.93	52.579	
14,700.00	9,890.00	9,550.00	9,545.93	119.41	50.73	-20.22	75.44	146.52	4,985.84	4,891.67	94.17	52.945	
14,800.00	9,890.00	9,550.00	9,545.93	121.36	50.73	-20.22	75.44	146.52	5,085.58	4,990.16	95.42	53.299	
14,900.00	9,890.00	9,550.00	9,545.93	123.31	50.73	-20.22	75.44	146.52	5,185.32	5,088.66	96.66	53.643	
15,000.00	9,890.00	9,550.00	9,545.93	125.27	50.73	-20.22	75.44	146.52	5,285.08	5,187.16	97.91	53.976	
15,100.00	9,890.00	9,550.00	9,545.93	127.23	50.73	-20.22	75.44	146.52	5,384.84	5,285.67	99.17	54.300	
15,200.00	9,890.00	9,550.00	9,545.93	129.20	50.73	-20.22	75.44	146.52	5,484.61	5,384.19	100.43	54.614	
15,300.00	9,890.00	9,550.00	9,545.93	131.18	50.73	-20.22	75.44	146.52	5,584.39	5,482.71	101.69	54.919	
15,400.00	9,890.00	9,550.00	9,545.93	133.16	50.73	-20.22	75.44	146.52	5,684.18	5,581.23	102.95	55.215	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Articollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 63 - OH - Plan 1 12-19-16												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
15,500.00	9,890.00	9,550.00	9,545.93	135.15	50.73	-20.22	75.44	146.52	5,783.97	5,679.76	104.21	55.503	
15,600.00	9,890.00	9,550.00	9,545.93	137.15	50.73	-20.22	75.44	146.52	5,883.78	5,778.30	105.48	55.783	
15,700.00	9,890.00	9,550.00	9,545.93	139.15	50.73	-20.22	75.44	146.52	5,983.59	5,876.84	106.75	56.055	
15,800.00	9,890.00	9,550.00	9,545.93	141.15	50.73	-20.22	75.44	146.52	6,083.40	5,975.39	108.02	56.320	
15,900.00	9,890.00	9,550.00	9,545.93	143.16	50.73	-20.22	75.44	146.52	6,183.22	6,073.93	109.29	56.577	
16,000.00	9,890.00	9,550.00	9,545.93	145.17	50.73	-20.22	75.44	146.52	6,283.05	6,172.49	110.56	56.828	
16,100.00	9,890.00	9,550.00	9,545.93	147.19	50.73	-20.22	75.44	146.52	6,382.88	6,271.04	111.84	57.072	
16,200.00	9,890.00	9,550.00	9,545.93	149.21	50.73	-20.22	75.44	146.52	6,482.72	6,369.60	113.12	57.310	
16,300.00	9,890.00	9,550.00	9,545.93	151.24	50.73	-20.22	75.44	146.52	6,582.56	6,468.17	114.40	57.542	
16,400.00	9,890.00	9,550.00	9,545.93	153.27	50.73	-20.22	75.44	146.52	6,682.41	6,566.73	115.68	57.768	
16,500.00	9,890.00	9,550.00	9,545.93	155.31	50.73	-20.22	75.44	146.52	6,782.26	6,665.30	116.96	57.989	
16,600.00	9,890.00	9,526.64	9,522.64	157.34	50.61	-19.02	77.16	146.56	6,881.60	6,765.30	116.30	59.172	
16,700.00	9,890.00	9,526.23	9,522.23	159.38	50.61	-19.00	77.18	146.56	6,981.44	6,863.90	117.54	59.397	
16,800.00	9,890.00	9,525.84	9,521.84	161.43	50.61	-18.98	77.20	146.56	7,081.29	6,962.51	118.78	59.617	
16,900.00	9,890.00	9,525.45	9,521.45	163.48	50.61	-18.96	77.22	146.56	7,181.14	7,061.12	120.02	59.832	
17,000.00	9,890.00	9,525.08	9,521.08	165.53	50.61	-18.94	77.24	146.56	7,280.99	7,159.73	121.26	60.042	
17,100.00	9,890.00	9,524.72	9,520.72	167.58	50.60	-18.93	77.26	146.56	7,380.85	7,258.34	122.51	60.247	
17,200.00	9,890.00	9,524.36	9,520.36	169.64	50.60	-18.91	77.28	146.56	7,480.71	7,356.96	123.76	60.447	
17,300.00	9,890.00	9,524.01	9,520.01	171.70	50.60	-18.89	77.30	146.56	7,580.58	7,455.57	125.01	60.642	
17,400.00	9,890.00	9,523.67	9,519.68	173.76	50.60	-18.88	77.31	146.56	7,680.45	7,554.19	126.25	60.833	
17,500.00	9,890.00	9,523.34	9,519.34	175.82	50.60	-18.86	77.33	146.56	7,780.32	7,652.81	127.51	61.020	
17,537.40	9,890.00	9,500.00	9,496.01	176.60	50.48	-17.81	77.97	146.57	7,818.18	7,691.96	126.22	61.941	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 65 - OH - Plan 1 12-19-16													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HOGM													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
0.00	0.00	0.00	0.00	0.00	0.00	180.00	-25.00	0.00	25.00					
100.00	100.00	100.00	100.00	0.20	0.20	180.00	-25.00	0.00	25.00	24.60	0.40	61.992		
200.00	200.00	200.00	200.00	0.74	0.74	180.00	-25.00	0.00	25.00	23.52	1.48	16.907		
300.00	300.00	300.00	300.00	1.28	1.28	180.00	-25.00	0.00	25.00	22.45	2.55	9.788		
400.00	400.00	400.00	400.00	1.81	1.81	180.00	-25.00	0.00	25.00	21.37	3.63	6.888		
500.00	500.00	500.00	500.00	2.35	2.35	180.00	-25.00	0.00	25.00	20.30	4.70	5.314		
600.00	600.00	600.00	600.00	2.89	2.89	180.00	-25.00	0.00	25.00	19.22	5.78	4.325		
700.00	700.00	700.00	700.00	3.43	3.43	180.00	-25.00	0.00	25.00	18.14	6.86	3.647		
800.00	800.00	800.00	800.00	3.97	3.97	180.00	-25.00	0.00	25.00	17.07	7.93	3.152		
900.00	900.00	900.00	900.00	4.50	4.50	180.00	-25.00	0.00	25.00	15.99	9.01	2.776		
1,000.00	1,000.00	1,000.00	1,000.00	5.04	5.04	180.00	-25.00	0.00	25.00	14.92	10.08	2.480		
1,100.00	1,100.00	1,100.00	1,100.00	5.58	5.58	180.00	-25.00	0.00	25.00	13.84	11.16	2.241		
1,200.00	1,200.00	1,200.00	1,200.00	6.12	6.12	180.00	-25.00	0.00	25.00	12.77	12.23	2.044		
1,300.00	1,300.00	1,300.00	1,300.00	6.65	6.65	180.00	-25.00	0.00	25.00	11.69	13.31	1.879		
1,400.00	1,400.00	1,400.00	1,400.00	7.19	7.19	180.00	-25.00	0.00	25.00	10.62	14.38	1.738		
1,500.00	1,500.00	1,500.00	1,500.00	7.73	7.73	180.00	-25.00	0.00	25.00	9.54	15.46	1.617		
1,600.00	1,600.00	1,600.00	1,600.00	8.27	8.27	180.00	-25.00	0.00	25.00	8.47	16.53	1.512		
1,700.00	1,700.00	1,700.00	1,700.00	8.80	8.80	180.00	-25.00	0.00	25.00	7.39	17.61	1.420	Level 3	
1,800.00	1,800.00	1,800.00	1,800.00	9.34	9.34	180.00	-25.00	0.00	25.00	6.31	18.69	1.338	Level 3	
1,900.00	1,900.00	1,900.00	1,900.00	9.88	9.88	180.00	-25.00	0.00	25.00	5.24	19.76	1.265	Level 3	
2,000.00	2,000.00	2,000.00	2,000.00	10.42	10.42	180.00	-25.00	0.00	25.00	4.16	20.84	1.200	Level 2	
2,100.00	2,099.98	2,100.34	2,100.32	10.94	10.95	97.70	-24.09	-1.50	24.31	2.41	21.89	1.110	Level 2	
2,146.42	2,146.37	2,146.75	2,146.69	11.18	11.20	106.37	-23.04	-3.21	24.02	1.64	22.38	1.073	Level 2 CC, ES, SF	
2,200.00	2,199.86	2,200.06	2,199.89	11.46	11.48	120.31	-21.37	-5.96	24.76	1.83	22.93	1.080	Level 2	
2,300.00	2,299.73	2,298.94	2,298.40	11.98	12.00	145.93	-16.89	-13.31	30.27	6.32	23.95	1.264	Level 3	
2,400.00	2,399.59	2,397.41	2,396.21	12.50	12.53	164.54	-11.00	-22.99	41.62	16.64	24.97	1.666		
2,500.00	2,499.45	2,496.05	2,494.17	13.02	13.06	174.84	-4.95	-32.91	55.63	29.62	26.01	2.139		
2,600.00	2,599.31	2,594.69	2,592.12	13.54	13.60	-179.10	1.10	-42.84	70.69	43.65	27.04	2.614		
2,700.00	2,699.18	2,693.33	2,690.08	14.07	14.14	-175.19	7.14	-52.76	86.25	58.18	28.08	3.072		
2,800.00	2,799.08	2,792.12	2,788.17	14.60	14.68	-172.43	13.20	-62.70	101.13	71.98	29.15	3.469		
2,900.00	2,899.07	2,891.31	2,886.67	15.13	15.23	-80.12	19.28	-72.69	112.98	82.76	30.22	3.738		
3,000.00	2,999.07	2,990.62	2,985.29	15.66	15.78	-78.12	25.36	-82.68	124.03	92.74	31.29	3.964		
3,100.00	3,099.07	3,089.92	3,083.90	16.20	16.34	-76.46	31.45	-92.67	135.20	102.85	32.35	4.179		
3,200.00	3,199.07	3,189.22	3,182.51	16.73	16.89	-75.05	37.54	-102.66	146.47	113.06	33.42	4.383		
3,300.00	3,299.07	3,288.53	3,281.12	17.27	17.45	-73.84	43.63	-112.66	157.82	123.33	34.48	4.576		
3,400.00	3,399.07	3,387.83	3,379.73	17.80	18.01	-72.80	49.71	-122.65	169.22	133.67	35.55	4.760		
3,500.00	3,499.08	3,487.13	3,478.35	18.34	18.57	-71.89	55.80	-132.64	180.67	144.05	36.62	4.934		
3,600.00	3,599.08	3,586.44	3,576.96	18.88	19.13	-71.08	61.89	-142.63	192.17	154.47	37.69	5.098		
3,700.00	3,699.08	3,685.74	3,675.57	19.41	19.69	-70.37	67.97	-152.63	203.69	164.93	38.76	5.255		
3,800.00	3,799.08	3,785.04	3,774.18	19.95	20.26	-69.73	74.06	-162.62	215.24	175.41	39.83	5.404		
3,900.00	3,899.08	3,884.35	3,872.79	20.48	20.82	-69.16	80.15	-172.61	226.82	185.92	40.90	5.545		
4,000.00	3,999.08	3,983.65	3,971.40	21.02	21.39	-68.64	86.23	-182.60	238.42	196.44	41.98	5.680		
4,100.00	4,099.08	4,082.95	4,070.02	21.56	21.96	-68.18	92.32	-192.59	250.03	206.98	43.05	5.808		
4,200.00	4,199.08	4,182.26	4,168.63	22.09	22.53	-67.75	98.41	-202.59	261.66	217.54	44.12	5.930		
4,300.00	4,299.08	4,281.56	4,267.24	22.63	23.09	-67.36	104.50	-212.58	273.31	228.11	45.20	6.047		
4,400.00	4,399.08	4,380.86	4,365.85	23.17	23.66	-67.00	110.58	-222.57	284.96	238.69	46.27	6.159		
4,500.00	4,499.08	4,480.17	4,464.46	23.70	24.23	-66.67	116.67	-232.56	296.62	249.28	47.34	6.265		
4,600.00	4,599.08	4,579.47	4,563.07	24.24	24.81	-66.36	122.76	-242.56	308.30	259.88	48.42	6.367		
4,700.00	4,699.08	4,678.77	4,661.69	24.78	25.38	-66.08	128.84	-252.55	319.98	270.48	49.49	6.465		
4,800.00	4,799.08	4,778.08	4,760.30	25.31	25.95	-65.82	134.93	-262.54	331.67	281.10	50.57	6.559		
4,900.00	4,899.08	4,877.38	4,858.91	25.85	26.52	-65.57	141.02	-272.53	343.36	291.72	51.65	6.648		
5,000.00	4,999.08	4,976.68	4,957.52	26.39	27.09	-65.34	147.10	-282.53	355.06	302.34	52.72	6.735		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 65 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
5,100.00	5,099.08	5,075.99	5,056.13	26.92	27.67	-65.13	153.19	-292.52	366.77	312.97	53.80	6.817	
5,200.00	5,199.08	5,175.29	5,154.74	27.46	28.24	-64.93	159.28	-302.51	378.48	323.60	54.87	6.897	
5,300.00	5,299.08	5,274.60	5,253.36	28.00	28.82	-64.74	165.37	-312.50	390.19	334.24	55.95	6.974	
5,400.00	5,399.08	5,373.90	5,351.97	28.53	29.39	-64.56	171.45	-322.50	401.91	344.88	57.03	7.048	
5,500.00	5,499.08	5,473.20	5,450.58	29.07	29.97	-64.39	177.54	-332.49	413.63	355.53	58.11	7.119	
5,600.00	5,599.08	5,572.51	5,549.19	29.61	30.54	-64.23	183.63	-342.48	425.36	366.18	59.18	7.187	
5,700.00	5,699.08	5,671.81	5,647.80	30.15	31.12	-64.08	189.71	-352.47	437.09	376.83	60.26	7.253	
5,800.00	5,799.08	5,786.70	5,762.08	30.68	31.77	-63.94	195.85	-362.55	447.35	385.93	61.42	7.283	
5,900.00	5,899.08	5,905.04	5,880.18	31.22	32.42	-63.85	199.70	-368.86	453.57	390.97	62.60	7.246	
6,000.00	5,999.08	6,023.80	5,998.90	31.76	33.05	-63.83	201.00	-371.00	455.67	391.91	63.76	7.146	
6,100.00	6,099.08	6,123.97	6,099.08	32.29	33.56	-63.83	201.00	-371.00	455.67	390.85	64.83	7.029	
6,200.00	6,199.08	6,223.97	6,199.08	32.83	34.07	-63.83	201.00	-371.00	455.67	389.78	65.89	6.916	
6,300.00	6,299.08	6,323.97	6,299.08	33.37	34.59	-63.83	201.00	-371.00	455.67	388.72	66.95	6.806	
6,400.00	6,399.08	6,423.97	6,399.08	33.91	35.11	-63.83	201.00	-371.00	455.67	387.66	68.02	6.700	
6,500.00	6,499.08	6,523.97	6,499.08	34.44	35.62	-63.83	201.00	-371.00	455.67	386.59	69.08	6.596	
6,600.00	6,599.08	6,623.97	6,599.08	34.98	36.14	-63.83	201.00	-371.00	455.67	385.53	70.14	6.496	
6,700.00	6,699.08	6,723.97	6,699.08	35.52	36.66	-63.83	201.00	-371.00	455.67	384.46	71.21	6.399	
6,800.00	6,799.08	6,823.97	6,799.08	36.05	37.17	-63.83	201.00	-371.00	455.67	383.40	72.27	6.305	
6,900.00	6,899.08	6,923.97	6,899.08	36.59	37.69	-63.83	201.00	-371.00	455.67	382.34	73.34	6.213	
7,000.00	6,999.08	7,023.97	6,999.08	37.13	38.21	-63.83	201.00	-371.00	455.67	381.27	74.40	6.124	
7,100.00	7,099.08	7,123.97	7,099.08	37.67	38.73	-63.83	201.00	-371.00	455.67	380.20	75.47	6.038	
7,200.00	7,199.08	7,223.97	7,199.08	38.20	39.25	-63.83	201.00	-371.00	455.67	379.14	76.53	5.954	
7,300.00	7,299.08	7,323.97	7,299.08	38.74	39.77	-63.83	201.00	-371.00	455.67	378.07	77.60	5.872	
7,400.00	7,399.08	7,423.97	7,399.08	39.28	40.29	-63.83	201.00	-371.00	455.67	377.01	78.67	5.793	
7,500.00	7,499.08	7,523.97	7,499.08	39.81	40.81	-63.83	201.00	-371.00	455.67	375.94	79.73	5.715	
7,600.00	7,599.08	7,623.97	7,599.08	40.35	41.34	-63.83	201.00	-371.00	455.67	374.87	80.80	5.640	
7,700.00	7,699.08	7,723.97	7,699.08	40.89	41.86	-63.83	201.00	-371.00	455.67	373.81	81.87	5.566	
7,800.00	7,799.08	7,823.97	7,799.08	41.43	42.38	-63.83	201.00	-371.00	455.67	372.74	82.93	5.494	
7,900.00	7,899.08	7,923.97	7,899.08	41.96	42.90	-63.83	201.00	-371.00	455.67	371.67	84.00	5.425	
8,000.00	7,999.08	8,023.97	7,999.08	42.50	43.43	-63.83	201.00	-371.00	455.67	370.60	85.07	5.357	
8,100.00	8,099.08	8,123.97	8,099.08	43.04	43.95	-63.83	201.00	-371.00	455.67	369.54	86.14	5.290	
8,200.00	8,199.08	8,223.97	8,199.08	43.58	44.47	-63.83	201.00	-371.00	455.67	368.47	87.20	5.225	
8,300.00	8,299.08	8,323.97	8,299.08	44.11	45.00	-63.83	201.00	-371.00	455.67	367.40	88.27	5.162	
8,400.00	8,399.08	8,423.97	8,399.08	44.65	45.52	-63.83	201.00	-371.00	455.67	366.33	89.34	5.100	
8,500.00	8,499.08	8,523.97	8,499.08	45.19	46.05	-63.83	201.00	-371.00	455.67	365.26	90.41	5.040	
8,600.00	8,599.08	8,623.97	8,599.08	45.73	46.57	-63.83	201.00	-371.00	455.67	364.19	91.48	4.981	
8,700.00	8,699.08	8,723.97	8,699.08	46.26	47.10	-63.83	201.00	-371.00	455.67	363.13	92.55	4.924	
8,762.29	8,761.37	8,786.26	8,761.37	46.60	47.43	-63.83	201.00	-371.00	455.67	362.46	93.21	4.889	
8,800.00	8,799.08	8,818.74	8,793.84	46.80	47.60	-63.80	201.25	-370.99	455.80	362.21	93.59	4.870	
8,900.00	8,899.08	8,900.00	8,874.63	47.34	48.03	-62.86	209.36	-370.54	459.66	365.10	94.56	4.861	
9,000.00	8,999.08	8,966.62	8,939.47	47.88	48.39	-61.16	224.47	-369.70	469.17	373.71	95.45	4.915	
9,100.00	9,099.08	9,034.01	9,002.82	48.41	48.75	-58.68	247.29	-368.44	485.35	389.01	96.34	5.038	
9,200.00	9,199.08	9,100.00	9,061.84	48.95	49.09	-55.65	276.68	-366.82	509.14	411.92	97.22	5.237	
9,300.00	9,299.08	9,150.00	9,104.09	49.49	49.35	-53.05	303.35	-365.35	541.01	443.01	98.00	5.521	
9,400.00	9,398.80	9,200.00	9,143.85	50.02	49.60	-49.03	333.60	-363.67	577.75	479.15	98.60	5.860	
9,500.00	9,496.03	9,250.00	9,180.81	50.54	49.84	-44.49	367.19	-361.82	611.70	513.87	97.83	6.253	
9,600.00	9,587.82	9,300.00	9,214.71	51.01	50.09	-40.97	403.88	-359.79	641.22	545.92	95.30	6.728	
9,700.00	9,671.39	9,350.00	9,245.27	51.48	50.35	-38.33	443.37	-357.61	665.26	574.17	91.09	7.303	
9,800.00	9,744.19	9,400.00	9,272.27	51.93	50.61	-36.47	485.37	-355.29	683.08	597.47	85.61	7.979	
9,900.00	9,804.01	9,450.00	9,295.50	52.37	50.88	-35.31	529.56	-352.85	694.17	614.55	79.62	8.719	
10,000.00	9,849.04	9,500.00	9,314.78	52.81	51.16	-34.78	575.60	-350.31	698.22	624.07	74.15	9.416	
10,100.00	9,877.90	9,550.00	9,329.97	53.25	51.45	-34.86	623.15	-347.68	695.09	624.64	70.45	9.867	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design													HH CE 35 2 Fed - 65 - OH - Plan 1 12-19-16		Offset Site Error: 0.00 usft	
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft			
Reference		Offset		Semi Major Axis			Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning			
10,200.00	9,889.72	9,800.00	9,340.96	53.70	51.75	-35.56	671.84	-344.99	684.81	615.18	69.63	9.835				
10,300.00	9,890.00	9,650.00	9,347.65	54.17	52.05	-36.10	721.30	-342.26	672.95	602.15	70.80	9.506				
10,392.82	9,890.00	9,701.94	9,350.00	54.67	52.37	-36.25	773.09	-339.40	669.59	597.92	71.66	9.343				
10,400.00	9,890.00	9,705.39	9,350.00	54.71	52.40	-36.28	776.54	-339.21	669.87	598.12	71.75	9.336				
10,500.00	9,890.00	9,805.39	9,350.00	55.33	53.06	-36.35	876.38	-333.69	670.51	597.63	72.88	9.200				
10,600.00	9,890.00	9,905.38	9,350.00	56.03	53.80	-36.43	976.22	-328.17	671.16	597.03	74.13	9.054				
10,700.00	9,890.00	10,005.38	9,350.00	56.80	54.61	-36.50	1,076.06	-322.66	671.80	596.31	75.50	8.899				
10,800.00	9,890.00	10,105.37	9,350.00	57.64	55.49	-36.58	1,175.90	-317.14	672.45	595.48	76.97	8.736				
10,900.00	9,890.00	10,205.36	9,350.00	58.54	56.44	-36.65	1,275.75	-311.63	673.09	594.54	78.55	8.569				
11,000.00	9,890.00	10,305.36	9,350.00	59.50	57.46	-36.72	1,375.59	-306.11	673.74	593.51	80.23	8.397				
11,100.00	9,890.00	10,405.35	9,350.00	60.53	58.53	-36.80	1,475.43	-300.60	674.39	592.38	82.00	8.224				
11,200.00	9,890.00	10,505.35	9,350.00	61.61	59.66	-36.87	1,575.27	-295.08	675.04	591.17	83.87	8.049				
11,300.00	9,890.00	10,605.34	9,350.00	62.75	60.84	-36.95	1,675.11	-289.56	675.69	589.88	85.81	7.874				
11,400.00	9,890.00	10,705.33	9,350.00	63.94	62.07	-37.02	1,774.96	-284.05	676.34	588.51	87.83	7.700				
11,500.00	9,890.00	10,805.33	9,350.00	65.18	63.36	-37.09	1,874.80	-278.53	677.00	587.07	89.93	7.528				
11,600.00	9,890.00	10,905.32	9,350.00	66.46	64.68	-37.17	1,974.64	-273.02	677.65	585.56	92.09	7.358				
11,700.00	9,890.00	11,005.32	9,350.00	67.78	66.05	-37.24	2,074.48	-267.50	678.31	583.98	94.32	7.191				
11,800.00	9,890.00	11,105.31	9,350.00	69.15	67.46	-37.31	2,174.32	-261.99	678.96	582.35	96.61	7.028				
11,900.00	9,890.00	11,205.31	9,350.00	70.55	68.91	-37.38	2,274.17	-256.47	679.62	580.66	98.96	6.868				
12,000.00	9,890.00	11,305.30	9,350.00	71.99	70.39	-37.46	2,374.01	-250.95	680.28	578.92	101.36	6.711				
12,100.00	9,890.00	11,405.29	9,350.00	73.46	71.91	-37.53	2,473.85	-245.44	680.94	577.13	103.81	6.559				
12,200.00	9,890.00	11,505.29	9,350.00	74.97	73.45	-37.60	2,573.69	-239.92	681.60	575.29	106.31	6.411				
12,300.00	9,890.00	11,605.28	9,350.00	76.50	75.03	-37.67	2,673.53	-234.41	682.26	573.41	108.85	6.268				
12,400.00	9,890.00	11,705.28	9,350.00	78.07	76.63	-37.75	2,773.37	-228.89	682.93	571.49	111.43	6.129				
12,500.00	9,890.00	11,800.00	9,350.00	79.66	78.17	-37.81	2,867.95	-223.67	683.61	569.63	113.98	5.997				
12,600.00	9,890.00	11,891.31	9,350.00	81.27	79.68	-37.92	2,959.19	-220.21	684.56	567.96	116.60	5.871				
12,700.00	9,890.00	11,978.48	9,350.00	82.92	81.15	-38.00	3,046.36	-219.62	685.26	566.17	119.09	5.754				
12,800.00	9,890.00	12,072.31	9,350.00	84.59	82.76	-38.03	3,140.17	-221.48	685.53	563.92	121.62	5.637				
12,900.00	9,890.00	12,172.31	9,350.00	86.28	84.49	-38.02	3,240.15	-223.79	685.50	561.23	124.27	5.516				
13,000.00	9,890.00	12,272.31	9,350.00	87.99	86.25	-38.02	3,340.12	-226.09	685.47	558.52	126.95	5.400				
13,100.00	9,890.00	12,372.31	9,350.00	89.73	88.02	-38.02	3,440.09	-228.40	685.44	555.79	129.65	5.287				
13,200.00	9,890.00	12,472.31	9,350.00	91.48	89.81	-38.01	3,540.07	-230.71	685.41	553.02	132.38	5.178				
13,300.00	9,890.00	12,572.31	9,350.00	93.25	91.61	-38.01	3,640.04	-233.01	685.37	550.24	135.13	5.072				
13,400.00	9,890.00	12,672.31	9,350.00	95.04	93.43	-38.01	3,740.01	-235.32	685.34	547.44	137.91	4.970				
13,500.00	9,890.00	12,772.31	9,350.00	96.84	95.27	-38.00	3,839.99	-237.63	685.31	544.61	140.70	4.871				
13,600.00	9,890.00	12,872.31	9,350.00	98.66	97.12	-38.00	3,939.96	-239.93	685.28	541.77	143.51	4.775				
13,700.00	9,890.00	12,972.31	9,350.00	100.49	98.98	-38.00	4,039.93	-242.24	685.25	538.91	146.34	4.683				
13,800.00	9,890.00	13,072.31	9,350.00	102.33	100.86	-37.99	4,139.91	-244.55	685.21	536.03	149.18	4.593				
13,900.00	9,890.00	13,172.31	9,350.00	104.19	102.74	-37.99	4,239.88	-246.85	685.18	533.14	152.05	4.506				
14,000.00	9,890.00	13,272.31	9,350.00	106.05	104.64	-37.99	4,339.85	-249.16	685.15	530.23	154.92	4.423				
14,100.00	9,890.00	13,372.31	9,350.00	107.93	106.55	-37.98	4,439.83	-251.47	685.12	527.31	157.81	4.341				
14,200.00	9,890.00	13,472.31	9,350.00	109.82	108.46	-37.98	4,539.80	-253.77	685.09	524.37	160.72	4.263				
14,300.00	9,890.00	13,572.31	9,350.00	111.72	110.39	-37.98	4,639.77	-256.08	685.05	521.42	163.63	4.187				
14,400.00	9,890.00	13,672.31	9,350.00	113.63	112.32	-37.97	4,739.75	-258.39	685.02	518.46	166.56	4.113				
14,500.00	9,890.00	13,772.31	9,350.00	115.55	114.27	-37.97	4,839.72	-260.69	684.99	515.49	169.50	4.041				
14,600.00	9,890.00	13,872.31	9,350.00	117.48	116.22	-37.97	4,939.69	-263.00	684.96	512.51	172.45	3.972				
14,700.00	9,890.00	13,972.31	9,350.00	119.41	118.18	-37.96	5,039.67	-265.31	684.93	509.52	175.41	3.905				
14,800.00	9,890.00	14,072.31	9,350.00	121.36	120.14	-37.96	5,139.64	-267.61	684.90	506.52	178.38	3.840				
14,900.00	9,890.00	14,172.31	9,350.00	123.31	122.12	-37.96	5,239.62	-269.92	684.86	503.51	181.36	3.776				
15,000.00	9,890.00	14,272.31	9,350.00	125.27	124.10	-37.95	5,339.59	-272.23	684.83	500.49	184.35	3.715				
15,100.00	9,890.00	14,372.31	9,350.00	127.23	126.08	-37.95	5,439.56	-274.53	684.80	497.46	187.34	3.655				
15,200.00	9,890.00	14,472.31	9,350.00	129.20	128.07	-37.95	5,539.54	-276.84	684.77	494.42	190.34	3.598				

CC - Min centre to center distance or convergent point, SF - min separation factor. ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 65 - OH - Plan 1 12-19-16												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
15,300.00	9,890.00	14,572.31	9,350.00	131.18	130.07	-37.94	5,639.51	-279.15	684.74	491.38	193.35	3.541	
15,400.00	9,890.00	14,672.31	9,350.00	133.16	132.07	-37.94	5,739.48	-281.45	684.70	488.33	196.37	3.487	
15,500.00	9,890.00	14,772.31	9,350.00	135.15	134.08	-37.94	5,839.46	-283.76	684.67	485.28	199.40	3.434	
15,600.00	9,890.00	14,872.31	9,350.00	137.15	136.09	-37.93	5,939.43	-286.06	684.64	482.21	202.43	3.382	
15,700.00	9,890.00	14,972.31	9,350.00	139.15	138.11	-37.93	6,039.40	-288.37	684.61	479.14	205.46	3.332	
15,800.00	9,890.00	15,072.31	9,350.00	141.15	140.13	-37.93	6,139.38	-290.68	684.58	476.07	208.51	3.283	
15,900.00	9,890.00	15,172.31	9,350.00	143.16	142.16	-37.92	6,239.35	-292.98	684.54	472.99	211.56	3.236	
16,000.00	9,890.00	15,272.31	9,350.00	145.17	144.19	-37.92	6,339.32	-295.29	684.51	469.90	214.61	3.190	
16,100.00	9,890.00	15,372.31	9,350.00	147.19	146.22	-37.92	6,439.30	-297.60	684.48	466.81	217.67	3.145	
16,200.00	9,890.00	15,472.31	9,350.00	149.21	148.26	-37.91	6,539.27	-299.90	684.45	463.72	220.73	3.101	
16,300.00	9,890.00	15,572.31	9,350.00	151.24	150.30	-37.91	6,639.24	-302.21	684.42	460.62	223.80	3.058	
16,400.00	9,890.00	15,672.31	9,350.00	153.27	152.35	-37.91	6,739.22	-304.52	684.38	457.51	226.87	3.017	
16,500.00	9,890.00	15,772.31	9,350.00	155.31	154.39	-37.90	6,839.19	-306.82	684.35	454.40	229.95	2.976	
16,600.00	9,890.00	15,872.31	9,350.00	157.34	156.44	-37.90	6,939.16	-309.13	684.32	451.29	233.03	2.937	
16,700.00	9,890.00	15,972.31	9,350.00	159.38	158.50	-37.89	7,039.14	-311.44	684.29	448.17	236.12	2.898	
16,800.00	9,890.00	16,072.31	9,350.00	161.43	160.56	-37.89	7,139.11	-313.74	684.26	445.05	239.21	2.861	
16,900.00	9,890.00	16,172.31	9,350.00	163.48	162.62	-37.89	7,239.08	-316.05	684.23	441.93	242.30	2.824	
17,000.00	9,890.00	16,272.31	9,350.00	165.53	164.68	-37.88	7,339.06	-318.36	684.19	438.80	245.39	2.788	
17,100.00	9,890.00	16,372.31	9,350.00	167.58	166.75	-37.88	7,439.03	-320.66	684.16	435.67	248.49	2.753	
17,200.00	9,890.00	16,472.31	9,350.00	169.64	168.81	-37.88	7,539.00	-322.97	684.13	432.53	251.60	2.719	
17,300.00	9,890.00	16,572.31	9,350.00	171.70	170.89	-37.87	7,638.98	-325.28	684.10	429.40	254.70	2.686	
17,400.00	9,890.00	16,672.31	9,350.00	173.76	172.96	-37.87	7,738.95	-327.58	684.07	426.26	257.81	2.653	
17,500.00	9,890.00	16,772.31	9,350.00	175.82	175.03	-37.87	7,838.92	-329.89	684.03	423.11	260.92	2.622	
17,537.40	9,890.00	16,809.72	9,350.00	176.60	175.81	-37.87	7,876.32	-330.75	684.02	421.94	262.09	2.610	

CC - Min centre to center distance or convergent point. SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 66 - OH - Plan 1 12-19-16													Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	1.00	0.00	0.00	0.00	-178.85	-50.00	-1.00	50.01					
100.00	100.00	101.00	100.00	0.20	0.21	-178.85	-50.00	-1.00	50.01	49.60	0.41	122.376		
200.00	200.00	201.00	200.00	0.74	0.74	-178.85	-50.00	-1.00	50.01	48.53	1.48	33.698		
300.00	300.00	301.00	300.00	1.28	1.28	-178.85	-50.00	-1.00	50.01	47.45	2.56	19.539		
400.00	400.00	401.00	400.00	1.81	1.82	-178.85	-50.00	-1.00	50.01	46.38	3.63	13.758		
500.00	500.00	501.00	500.00	2.35	2.36	-178.85	-50.00	-1.00	50.01	45.30	4.71	10.617		
600.00	600.00	601.00	600.00	2.89	2.90	-178.85	-50.00	-1.00	50.01	44.22	5.79	8.644		
700.00	700.00	701.00	700.00	3.43	3.43	-178.85	-50.00	-1.00	50.01	43.15	6.86	7.289		
800.00	800.00	801.00	800.00	3.97	3.97	-178.85	-50.00	-1.00	50.01	42.07	7.94	6.301		
900.00	900.00	901.00	900.00	4.50	4.51	-178.85	-50.00	-1.00	50.01	41.00	9.01	5.549		
1,000.00	1,000.00	1,001.00	1,000.00	5.04	5.05	-178.85	-50.00	-1.00	50.01	39.92	10.09	4.958		
1,100.00	1,100.00	1,101.00	1,100.00	5.58	5.58	-178.85	-50.00	-1.00	50.01	38.85	11.16	4.480		
1,200.00	1,200.00	1,201.00	1,200.00	6.12	6.12	-178.85	-50.00	-1.00	50.01	37.77	12.24	4.086		
1,300.00	1,300.00	1,301.00	1,300.00	6.65	6.66	-178.85	-50.00	-1.00	50.01	36.70	13.31	3.756		
1,400.00	1,400.00	1,401.00	1,400.00	7.19	7.20	-178.85	-50.00	-1.00	50.01	35.62	14.39	3.476		
1,500.00	1,500.00	1,501.00	1,500.00	7.73	7.73	-178.85	-50.00	-1.00	50.01	34.55	15.46	3.234		
1,600.00	1,600.00	1,601.00	1,600.00	8.27	8.27	-178.85	-50.00	-1.00	50.01	33.47	16.54	3.024		
1,700.00	1,700.00	1,701.00	1,700.00	8.80	8.81	-178.85	-50.00	-1.00	50.01	32.39	17.62	2.839		
1,800.00	1,800.00	1,801.00	1,800.00	9.34	9.35	-178.85	-50.00	-1.00	50.01	31.32	18.69	2.676		
1,900.00	1,900.00	1,901.00	1,900.00	9.88	9.89	-178.85	-50.00	-1.00	50.01	30.24	19.77	2.530		
2,000.00	2,000.00	2,001.01	2,000.01	10.42	10.42	-178.85	-50.00	-1.00	50.01	29.17	20.84	2.400		
2,100.00	2,099.98	2,101.45	2,100.43	10.94	10.96	95.14	-49.39	-2.69	49.59	27.69	21.90	2.264		
2,156.32	2,156.25	2,157.77	2,156.69	11.23	11.25	100.60	-48.51	-5.08	49.36	26.87	22.48	2.195 CC		
2,200.00	2,199.86	2,201.23	2,200.07	11.46	11.48	106.59	-47.58	-7.64	49.65	26.72	22.93	2.165		
2,300.00	2,299.73	2,300.51	2,299.10	11.98	12.00	119.76	-45.22	-14.15	52.12	28.16	23.97	2.175		
2,400.00	2,399.59	2,399.79	2,398.14	12.50	12.53	131.22	-42.85	-20.65	57.07	32.07	25.00	2.283		
2,500.00	2,499.45	2,499.06	2,497.17	13.02	13.05	140.57	-40.48	-27.16	63.91	37.88	26.03	2.455		
2,600.00	2,599.31	2,598.34	2,596.21	13.54	13.58	147.96	-38.11	-33.67	72.12	45.05	27.07	2.664		
2,700.00	2,699.18	2,697.62	2,695.24	14.07	14.11	153.78	-35.74	-40.18	81.27	53.16	28.11	2.891		
2,800.00	2,799.08	2,797.00	2,794.38	14.60	14.65	158.22	-33.37	-46.69	90.19	61.01	29.18	3.091		
2,900.00	2,899.07	2,896.68	2,893.83	15.13	15.18	-108.77	-30.99	-53.23	96.44	66.19	30.24	3.189		
3,000.00	2,999.07	2,996.44	2,993.34	15.66	15.72	-106.32	-28.61	-59.76	101.97	70.67	31.31	3.257		
3,100.00	3,099.07	3,096.20	3,092.85	16.20	16.26	-104.12	-26.23	-66.30	107.68	75.31	32.37	3.327		
3,200.00	3,199.07	3,199.25	3,195.75	16.73	16.81	-102.55	-24.36	-71.45	112.12	78.67	33.45	3.352		
3,300.00	3,299.07	3,302.59	3,299.07	17.27	17.36	-102.07	-23.75	-73.11	113.57	79.03	34.54	3.288		
3,400.00	3,399.07	3,402.59	3,399.07	17.80	17.90	-102.07	-23.75	-73.11	113.57	77.96	35.61	3.190		
3,500.00	3,499.08	3,502.59	3,499.08	18.34	18.43	-102.07	-23.75	-73.11	113.57	76.89	36.68	3.096		
3,600.00	3,599.08	3,602.59	3,599.08	18.88	18.97	-102.07	-23.75	-73.11	113.57	75.82	37.75	3.009		
3,700.00	3,699.08	3,702.59	3,699.08	19.41	19.50	-102.07	-23.75	-73.11	113.57	74.75	38.82	2.926		
3,800.00	3,799.08	3,802.59	3,799.08	19.95	20.03	-102.07	-23.75	-73.11	113.57	73.68	39.89	2.847		
3,900.00	3,899.08	3,902.59	3,899.08	20.48	20.57	-102.07	-23.75	-73.11	113.57	72.61	40.96	2.773		
4,000.00	3,999.08	4,002.59	3,999.08	21.02	21.10	-102.07	-23.75	-73.11	113.57	71.53	42.03	2.702		
4,100.00	4,099.08	4,102.59	4,099.08	21.56	21.64	-102.07	-23.75	-73.11	113.57	70.46	43.10	2.635		
4,200.00	4,199.08	4,202.59	4,199.08	22.09	22.17	-102.07	-23.75	-73.11	113.57	69.39	44.18	2.571		
4,300.00	4,299.08	4,302.59	4,299.08	22.63	22.71	-102.07	-23.75	-73.11	113.57	68.32	45.25	2.510		
4,400.00	4,399.08	4,402.59	4,399.08	23.17	23.24	-102.07	-23.75	-73.11	113.57	67.25	46.32	2.452		
4,500.00	4,499.08	4,502.59	4,499.08	23.70	23.78	-102.07	-23.75	-73.11	113.57	66.17	47.39	2.396		
4,600.00	4,599.08	4,602.59	4,599.08	24.24	24.31	-102.07	-23.75	-73.11	113.57	65.10	48.47	2.343		
4,700.00	4,699.08	4,702.59	4,699.08	24.78	24.85	-102.07	-23.75	-73.11	113.57	64.03	49.54	2.293		
4,800.00	4,799.08	4,802.59	4,799.08	25.31	25.38	-102.07	-23.75	-73.11	113.57	62.96	50.61	2.244		
4,900.00	4,899.08	4,902.59	4,899.08	25.85	25.92	-102.07	-23.75	-73.11	113.57	61.88	51.68	2.197		
5,000.00	4,999.08	5,002.59	4,999.08	26.39	26.46	-102.07	-23.75	-73.11	113.57	60.81	52.76	2.153		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 66 - OH - Plan 1 12-19-16												Offset Site Error:	0.00 usft
Survey Program: 0-MWD+HDGM												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
5,100.00	5,099.08	5,102.59	5,099.08	26.92	26.99	-102.07	-23.75	-73.11	113.57	59.74	53.83	2.110	
5,200.00	5,199.08	5,202.59	5,199.08	27.46	27.53	-102.07	-23.75	-73.11	113.57	58.66	54.90	2.068	
5,300.00	5,299.08	5,302.59	5,299.08	28.00	28.06	-102.07	-23.75	-73.11	113.57	57.59	55.98	2.029	
5,400.00	5,399.08	5,402.59	5,399.08	28.53	28.60	-102.07	-23.75	-73.11	113.57	56.52	57.05	1.991	
5,500.00	5,499.08	5,502.59	5,499.08	29.07	29.14	-102.07	-23.75	-73.11	113.57	55.44	58.12	1.954	
5,600.00	5,599.08	5,602.59	5,599.08	29.61	29.67	-102.07	-23.75	-73.11	113.57	54.37	59.20	1.918	
5,700.00	5,699.08	5,702.59	5,699.08	30.15	30.21	-102.07	-23.75	-73.11	113.57	53.30	60.27	1.884	
5,800.00	5,799.08	5,802.59	5,799.08	30.68	30.74	-102.07	-23.75	-73.11	113.57	52.22	61.34	1.851	
5,900.00	5,899.08	5,902.59	5,899.08	31.22	31.28	-102.07	-23.75	-73.11	113.57	51.15	62.42	1.819	
6,000.00	5,999.08	6,002.59	5,999.08	31.76	31.82	-102.07	-23.75	-73.11	113.57	50.08	63.49	1.789	
6,100.00	6,099.08	6,102.59	6,099.08	32.29	32.35	-102.07	-23.75	-73.11	113.57	49.00	64.57	1.759	
6,200.00	6,199.08	6,202.59	6,199.08	32.83	32.89	-102.07	-23.75	-73.11	113.57	47.93	65.64	1.730	
6,300.00	6,299.08	6,302.59	6,299.08	33.37	33.43	-102.07	-23.75	-73.11	113.57	46.85	66.71	1.702	
6,400.00	6,399.08	6,402.59	6,399.08	33.91	33.96	-102.07	-23.75	-73.11	113.57	45.78	67.79	1.675	
6,500.00	6,499.08	6,502.59	6,499.08	34.44	34.50	-102.07	-23.75	-73.11	113.57	44.71	68.86	1.649	
6,600.00	6,599.08	6,602.59	6,599.08	34.98	35.04	-102.07	-23.75	-73.11	113.57	43.63	69.94	1.624	
6,700.00	6,699.08	6,702.59	6,699.08	35.52	35.57	-102.07	-23.75	-73.11	113.57	42.56	71.01	1.599	
6,800.00	6,799.08	6,802.59	6,799.08	36.05	36.11	-102.07	-23.75	-73.11	113.57	41.48	72.08	1.575	
6,900.00	6,899.08	6,902.59	6,899.08	36.59	36.65	-102.07	-23.75	-73.11	113.57	40.41	73.16	1.552	
7,000.00	6,999.08	7,002.59	6,999.08	37.13	37.18	-102.07	-23.75	-73.11	113.57	39.33	74.23	1.530	
7,100.00	7,099.08	7,102.59	7,099.08	37.67	37.72	-102.07	-23.75	-73.11	113.57	38.26	75.31	1.508	
7,200.00	7,199.08	7,202.59	7,199.08	38.20	38.26	-102.07	-23.75	-73.11	113.57	37.19	76.38	1.487 Level 3	
7,300.00	7,299.08	7,302.59	7,299.08	38.74	38.79	-102.07	-23.75	-73.11	113.57	36.11	77.46	1.466 Level 3	
7,400.00	7,399.08	7,402.59	7,399.08	39.28	39.33	-102.07	-23.75	-73.11	113.57	35.04	78.53	1.446 Level 3	
7,500.00	7,499.08	7,502.59	7,499.08	39.81	39.87	-102.07	-23.75	-73.11	113.57	33.96	79.60	1.427 Level 3	
7,600.00	7,599.08	7,602.59	7,599.08	40.35	40.40	-102.07	-23.75	-73.11	113.57	32.89	80.68	1.408 Level 3	
7,700.00	7,699.08	7,702.59	7,699.08	40.89	40.94	-102.07	-23.75	-73.11	113.57	31.81	81.75	1.389 Level 3	
7,800.00	7,799.08	7,802.59	7,799.08	41.43	41.48	-102.07	-23.75	-73.11	113.57	30.74	82.83	1.371 Level 3	
7,900.00	7,899.08	7,902.59	7,899.08	41.96	42.02	-102.07	-23.75	-73.11	113.57	29.67	83.90	1.354 Level 3	
8,000.00	7,999.08	8,002.59	7,999.08	42.50	42.55	-102.07	-23.75	-73.11	113.57	28.59	84.98	1.336 Level 3	
8,100.00	8,099.08	8,102.59	8,099.08	43.04	43.09	-102.07	-23.75	-73.11	113.57	27.52	86.05	1.320 Level 3	
8,200.00	8,199.08	8,202.59	8,199.08	43.58	43.63	-102.07	-23.75	-73.11	113.57	26.44	87.13	1.303 Level 3	
8,300.00	8,299.08	8,302.59	8,299.08	44.11	44.16	-102.07	-23.75	-73.11	113.57	25.37	88.20	1.288 Level 3	
8,400.00	8,399.08	8,402.59	8,399.08	44.65	44.70	-102.07	-23.75	-73.11	113.57	24.29	89.27	1.272 Level 3	
8,500.00	8,499.08	8,502.59	8,499.08	45.19	45.24	-102.07	-23.75	-73.11	113.57	23.22	90.35	1.257 Level 3	
8,600.00	8,599.08	8,602.59	8,599.08	45.73	45.77	-102.07	-23.75	-73.11	113.57	22.14	91.42	1.242 Level 2	
8,700.00	8,699.08	8,702.59	8,699.08	46.26	46.31	-102.07	-23.75	-73.11	113.57	21.07	92.50	1.228 Level 2	
8,800.00	8,799.08	8,802.59	8,799.08	46.80	46.85	-102.07	-23.75	-73.11	113.57	19.99	93.57	1.214 Level 2	
8,900.00	8,899.08	8,902.59	8,899.08	47.34	47.39	-102.07	-23.75	-73.11	113.57	18.92	94.65	1.200 Level 2	
9,000.00	8,999.08	9,008.73	9,004.65	47.88	47.95	-97.58	-14.59	-71.74	110.79	15.05	95.75	1.157 Level 2	
9,100.00	9,099.08	9,108.42	9,100.69	48.41	48.46	-83.85	11.39	-67.86	106.43	9.64	96.79	1.100 Level 2	
9,113.06	9,112.14	9,120.67	9,112.14	48.48	48.52	-81.50	15.72	-67.21	106.32	9.41	96.92	1.097 Level 2, ES, SF	
9,200.00	9,199.08	9,196.84	9,180.94	48.95	48.88	-64.48	47.91	-62.40	112.67	14.90	97.76	1.152 Level 2	
9,300.00	9,299.08	9,272.36	9,244.30	49.49	49.21	-46.83	88.45	-56.34	140.41	41.76	98.65	1.423 Level 3	
9,400.00	9,398.80	9,338.51	9,294.95	50.02	49.51	-33.46	130.47	-50.06	184.59	85.70	98.89	1.867	
9,500.00	9,496.03	9,400.00	9,337.36	50.54	49.80	-24.34	174.47	-43.49	230.54	133.79	96.75	2.383	
9,600.00	9,587.82	9,463.82	9,376.07	51.01	50.09	-18.19	224.61	-35.99	273.87	181.97	91.90	2.980	
9,700.00	9,671.39	9,524.22	9,407.30	51.48	50.36	-14.12	275.71	-28.36	312.79	228.19	84.61	3.697	
9,800.00	9,744.19	9,583.60	9,432.54	51.93	50.63	-11.21	328.84	-20.41	346.29	270.96	75.33	4.597	
9,900.00	9,804.01	9,650.00	9,454.01	52.37	50.94	-8.82	390.94	-11.13	373.87	309.18	64.68	5.780	
10,000.00	9,849.04	9,700.00	9,465.30	52.81	51.17	-7.33	439.10	-3.94	394.72	340.93	53.80	7.337	
10,100.00	9,877.90	9,750.00	9,472.31	53.25	51.41	-6.09	488.05	3.38	409.09	364.80	44.29	9.236	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 66 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD-HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
10,200.00	9,889.72	9,822.75	9,475.00	53.70	51.75	-4.63	559.91	14.12	416.10	377.29	38.81	10.721	
10,300.00	9,890.00	9,922.04	9,475.00	54.17	52.27	-3.02	658.11	28.80	415.58	376.84	38.74	10.727	
10,400.00	9,890.00	10,021.65	9,475.00	54.71	52.87	-1.82	756.62	43.52	415.21	375.84	39.37	10.545	
10,500.00	9,890.00	10,121.31	9,475.00	55.33	53.55	-0.69	855.19	58.25	415.03	374.80	40.23	10.316	
10,560.69	9,890.00	10,181.79	9,475.00	55.75	54.00	0.00	915.01	67.19	415.00	374.14	40.86	10.156	
10,600.00	9,890.00	10,220.97	9,475.00	56.03	54.30	0.45	953.76	72.98	415.01	373.71	41.30	10.049	
10,700.00	9,890.00	10,320.81	9,475.00	56.80	55.13	1.53	1,052.55	87.38	415.15	372.59	42.56	9.753	
10,800.00	9,890.00	10,421.17	9,475.00	57.64	56.03	2.21	1,152.24	98.90	415.31	371.37	43.94	9.451	
10,900.00	9,890.00	10,521.75	9,475.00	58.54	56.99	2.40	1,252.50	106.94	415.37	370.01	45.35	9.158	
11,000.00	9,890.00	10,621.87	9,475.00	59.50	58.01	2.26	1,352.46	112.54	415.32	368.54	46.79	8.877	
11,100.00	9,890.00	10,721.86	9,475.00	60.53	59.09	2.11	1,452.30	118.05	415.28	366.99	48.29	8.600	
11,200.00	9,890.00	10,821.86	9,475.00	61.61	60.23	1.96	1,552.14	123.57	415.24	365.39	49.86	8.329	
11,300.00	9,890.00	10,921.85	9,475.00	62.75	61.42	1.81	1,651.99	129.09	415.21	363.72	51.49	8.065	
11,400.00	9,890.00	11,021.85	9,475.00	63.94	62.66	1.66	1,751.83	134.60	415.18	362.01	53.17	7.809	
11,500.00	9,890.00	11,121.84	9,475.00	65.18	63.95	1.51	1,851.67	140.12	415.15	360.24	54.90	7.561	
11,600.00	9,890.00	11,221.84	9,475.00	66.46	65.28	1.37	1,951.51	145.64	415.12	358.44	56.68	7.324	
11,700.00	9,890.00	11,321.83	9,475.00	67.78	66.66	1.22	2,051.35	151.15	415.09	356.59	58.50	7.095	
11,800.00	9,890.00	11,421.82	9,475.00	69.15	68.07	1.07	2,151.20	156.67	415.07	354.71	60.36	6.877	
11,900.00	9,890.00	11,521.82	9,475.00	70.55	69.52	0.92	2,251.04	162.19	415.05	352.80	62.25	6.667	
12,000.00	9,890.00	11,621.81	9,475.00	71.99	71.01	0.77	2,350.88	167.70	415.04	350.86	64.18	6.467	
12,100.00	9,890.00	11,721.81	9,475.00	73.46	72.52	0.62	2,450.72	173.22	415.02	348.89	66.13	6.276	
12,200.00	9,890.00	11,821.80	9,475.00	74.97	74.07	0.47	2,550.56	178.74	415.01	346.90	68.11	6.093	
12,300.00	9,890.00	11,921.79	9,475.00	76.50	75.65	0.32	2,650.40	184.25	415.01	344.89	70.11	5.919	
12,400.00	9,890.00	12,021.79	9,475.00	78.07	77.25	0.17	2,750.25	189.77	415.00	342.86	72.14	5.753	
12,500.00	9,890.00	12,121.78	9,475.00	79.66	78.88	0.02	2,850.09	195.29	415.00	340.81	74.19	5.594	
12,520.94	9,890.00	12,142.72	9,475.00	79.99	79.22	0.00	2,871.00	196.43	415.00	340.38	74.62	5.562	
12,600.00	9,890.00	12,221.76	9,475.00	81.27	80.53	-0.13	2,949.98	199.48	415.00	338.75	76.25	5.442	
12,700.00	9,890.00	12,321.71	9,475.00	82.92	82.21	-0.28	3,049.91	200.22	415.00	336.67	78.34	5.298	
12,800.00	9,890.00	12,421.67	9,475.00	84.59	83.90	-0.36	3,149.86	198.16	415.01	334.57	80.44	5.159	
12,900.00	9,890.00	12,521.67	9,475.00	86.28	85.62	-0.35	3,249.83	195.85	415.01	332.46	82.55	5.028	
13,000.00	9,890.00	12,621.67	9,475.00	87.99	87.36	-0.34	3,349.80	193.55	415.01	330.34	84.67	4.901	
13,100.00	9,890.00	12,721.67	9,475.00	89.73	89.12	-0.33	3,449.78	191.24	415.01	328.20	86.81	4.781	
13,200.00	9,890.00	12,821.67	9,475.00	91.48	90.89	-0.33	3,549.75	188.94	415.01	326.06	88.95	4.666	
13,300.00	9,890.00	12,921.67	9,475.00	93.25	92.69	-0.32	3,649.72	186.63	415.01	323.90	91.11	4.555	
13,400.00	9,890.00	13,021.67	9,475.00	95.04	94.49	-0.31	3,749.70	184.33	415.01	321.73	93.27	4.449	
13,500.00	9,890.00	13,121.67	9,475.00	96.84	96.32	-0.30	3,849.67	182.03	415.01	319.56	95.45	4.348	
13,600.00	9,890.00	13,221.67	9,475.00	98.66	98.15	-0.30	3,949.64	179.72	415.01	317.37	97.63	4.251	
13,700.00	9,890.00	13,321.67	9,475.00	100.49	100.00	-0.29	4,049.62	177.42	415.01	315.18	99.82	4.157	
13,800.00	9,890.00	13,421.67	9,475.00	102.33	101.86	-0.28	4,149.59	175.11	415.00	312.98	102.02	4.068	
13,900.00	9,890.00	13,521.67	9,475.00	104.19	103.74	-0.27	4,249.56	172.81	415.00	310.78	104.23	3.982	
14,000.00	9,890.00	13,621.67	9,475.00	106.05	105.62	-0.27	4,349.54	170.51	415.00	308.57	106.44	3.899	
14,100.00	9,890.00	13,721.67	9,475.00	107.93	107.52	-0.26	4,449.51	168.20	415.00	306.35	108.65	3.819	
14,200.00	9,890.00	13,821.67	9,475.00	109.82	109.42	-0.25	4,549.48	165.90	415.00	304.13	110.88	3.743	
14,300.00	9,890.00	13,921.67	9,475.00	111.72	111.34	-0.24	4,649.46	163.59	415.00	301.90	113.11	3.669	
14,400.00	9,890.00	14,021.67	9,475.00	113.63	113.27	-0.24	4,749.43	161.29	415.00	299.66	115.34	3.598	
14,500.00	9,890.00	14,121.67	9,475.00	115.55	115.20	-0.23	4,849.40	158.99	415.00	297.43	117.56	3.530	
14,600.00	9,890.00	14,221.67	9,475.00	117.48	117.14	-0.22	4,949.38	156.68	415.00	295.18	119.82	3.464	
14,700.00	9,890.00	14,321.67	9,475.00	119.41	119.09	-0.21	5,049.35	154.38	415.00	292.94	122.07	3.400	
14,800.00	9,890.00	14,421.67	9,475.00	121.36	121.05	-0.21	5,149.32	152.07	415.00	290.68	124.32	3.338	
14,900.00	9,890.00	14,521.67	9,475.00	123.31	123.01	-0.20	5,249.30	149.77	415.00	288.43	126.57	3.279	
15,000.00	9,890.00	14,621.67	9,475.00	125.27	124.98	-0.19	5,349.27	147.46	415.00	286.17	128.83	3.221	
15,100.00	9,890.00	14,721.67	9,475.00	127.23	126.96	-0.18	5,449.25	145.16	415.00	283.91	131.09	3.166	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report



Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Reference Site: HH CE 35 2 Fed
 Site Error: 0.00 usft
 Reference Well: 64
 Well Error: 0.00 usft
 Reference Wellbore: OH
 Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at 3.00 sigma
 Database: Compass 5000 GCR
 Offset TVD Reference: Reference Datum

Offset Design HH CE 35 2 Fed - 66 - OH - Plan 1 12-19-16													Offset Site Error: 0.00 usft
Survey Program: 0-MWD+HDGM													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
15,200.00	9,890.00	14,821.67	9,475.00	129.20	128.94	-0.18	5,549.22	142.86	415.00	281.65	133.36	3.112	
15,300.00	9,890.00	14,921.67	9,475.00	131.18	130.93	-0.17	5,649.19	140.55	415.00	279.38	135.62	3.060	
15,400.00	9,890.00	15,021.67	9,475.00	133.16	132.92	-0.16	5,749.17	138.25	415.00	277.11	137.89	3.010	
15,500.00	9,890.00	15,121.67	9,475.00	135.15	134.92	-0.15	5,849.14	135.94	415.00	274.83	140.17	2.961	
15,600.00	9,890.00	15,221.67	9,475.00	137.15	136.93	-0.15	5,949.11	133.64	415.00	272.56	142.44	2.913	
15,700.00	9,890.00	15,321.67	9,475.00	139.15	138.94	-0.14	6,049.09	131.34	415.00	270.28	144.72	2.868	
15,800.00	9,890.00	15,421.67	9,475.00	141.15	140.95	-0.13	6,149.06	129.03	415.00	268.00	147.00	2.823	
15,900.00	9,890.00	15,521.67	9,475.00	143.16	142.97	-0.12	6,249.03	126.73	415.00	265.71	149.29	2.780	
16,000.00	9,890.00	15,621.67	9,475.00	145.17	145.00	-0.12	6,349.01	124.42	415.00	263.43	151.57	2.738	
16,100.00	9,890.00	15,721.67	9,475.00	147.19	147.02	-0.11	6,448.98	122.12	415.00	261.14	153.86	2.697	
16,200.00	9,890.00	15,821.67	9,475.00	149.21	149.06	-0.10	6,548.95	119.82	415.00	258.85	156.15	2.658	
16,300.00	9,890.00	15,921.67	9,475.00	151.24	151.09	-0.09	6,648.93	117.51	415.00	256.56	158.44	2.619	
16,400.00	9,890.00	16,021.67	9,475.00	153.27	153.13	-0.09	6,748.90	115.21	415.00	254.27	160.73	2.582	
16,500.00	9,890.00	16,121.67	9,475.00	155.31	155.17	-0.08	6,848.87	112.90	415.00	251.97	163.03	2.546	
16,600.00	9,890.00	16,221.67	9,475.00	157.34	157.22	-0.07	6,948.85	110.60	415.00	249.67	165.33	2.510	
16,700.00	9,890.00	16,321.67	9,475.00	159.38	159.27	-0.06	7,048.82	108.29	415.00	247.38	167.62	2.476	
16,800.00	9,890.00	16,421.67	9,475.00	161.43	161.32	-0.06	7,148.79	105.99	415.00	245.08	169.92	2.442	
16,900.00	9,890.00	16,521.67	9,475.00	163.48	163.37	-0.05	7,248.77	103.69	415.00	242.77	172.23	2.410	
17,000.00	9,890.00	16,621.67	9,475.00	165.53	165.43	-0.04	7,348.74	101.38	415.00	240.47	174.53	2.378	
17,100.00	9,890.00	16,721.67	9,475.00	167.58	167.49	-0.03	7,448.71	99.08	415.00	238.17	176.83	2.347	
17,200.00	9,890.00	16,821.67	9,475.00	169.64	169.56	-0.03	7,548.69	96.77	415.00	235.86	179.14	2.317	
17,300.00	9,890.00	16,921.67	9,475.00	171.70	171.62	-0.02	7,648.66	94.47	415.00	233.56	181.44	2.287	
17,400.00	9,890.00	17,021.67	9,475.00	173.76	173.69	-0.01	7,748.63	92.17	415.00	231.25	183.75	2.258	
17,500.00	9,890.00	17,121.67	9,475.00	175.82	175.76	0.00	7,848.61	89.86	415.00	228.94	186.06	2.230	
17,503.67	9,890.00	17,125.34	9,475.00	175.90	175.84	0.00	7,852.28	89.78	415.00	228.85	186.15	2.229	
17,537.40	9,890.00	17,159.08	9,475.00	176.60	176.53	0.00	7,886.00	89.00	415.00	228.07	186.93	2.220	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Phoenix Technology Services LP

Anticollision Report




Company: Chevron
Project: Eddy County, NM (NAD27 NME)
Reference Site: HH CE 35 2 Fed
Site Error: 0.00 usft
Reference Well: 64
Well Error: 0.00 usft
Reference Wellbore: OH
Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
TVD Reference: GL + KB @ 3170.00usft
MD Reference: GL + KB @ 3170.00usft
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 3.00 sigma
Database: Compass 5000 GCR
Offset TVD Reference: Reference Datum

Reference Depths are relative to GL + KB @ 3170.00usft
Offset Depths are relative to Offset Datum
Central Meridian is 104° 19' 60.00000 W

Coordinates are relative to: 64
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.10°

Ladder Plot

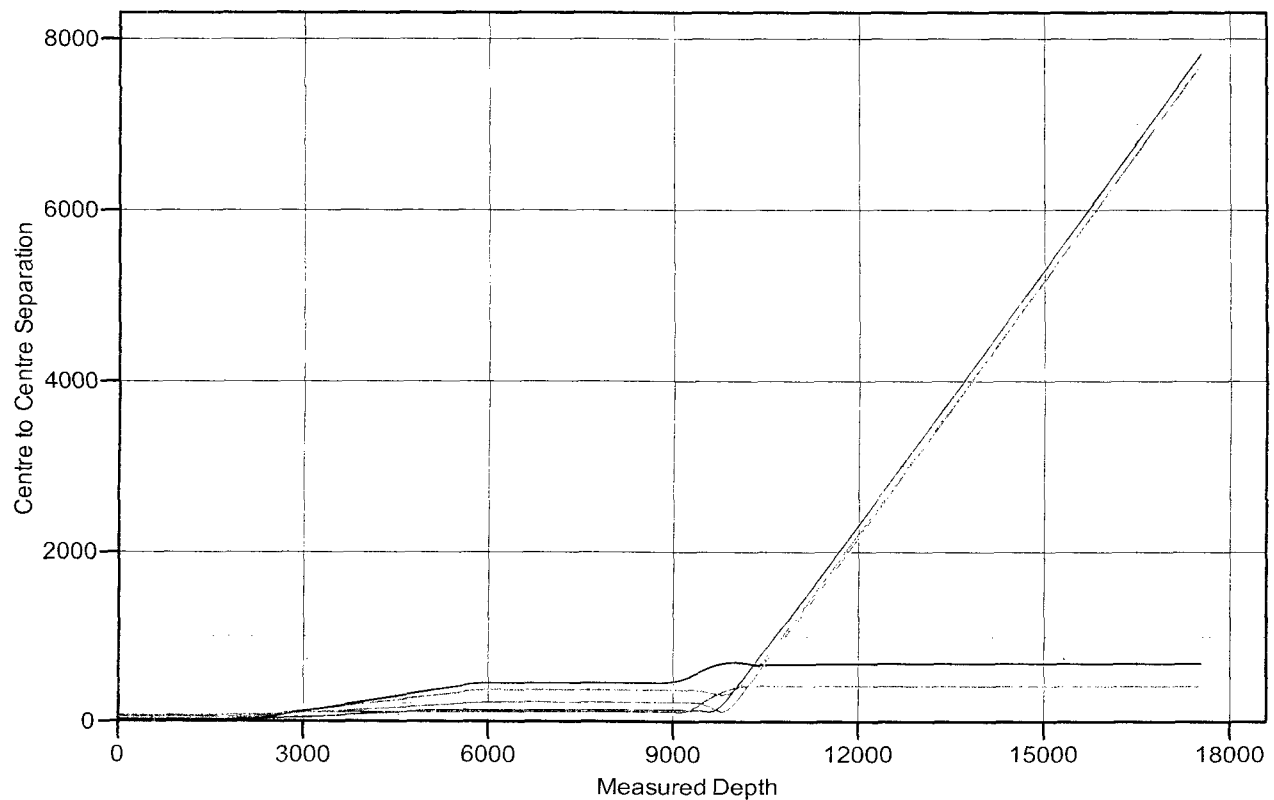

LEGEND

63, OH, Plan 1 12-19-16 V0 62, OH, Plan 1 12-19-16 V0 61, OH, Plan 1 12-19-16 V0
66, OH, Plan 1 12-19-16 V0 65, OH, Plan 1 12-19-16 V0



Phoenix Technology Services LP

Anticollision Report




Company: Chevron
Project: Eddy County, NM (NAD27 NME)
Reference Site: HH CE 35 2 Fed
Site Error: 0.00 usft
Reference Well: 64
Well Error: 0.00 usft
Reference Wellbore: OH
Reference Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
TVD Reference: GL + KB @ 3170.00usft
MD Reference: GL + KB @ 3170.00usft
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 3.00 sigma
Database: Compass 5000 GCR
Offset TVD Reference: Reference Datum

Reference Depths are relative to GL + KB @ 3170.00usft
Offset Depths are relative to Offset Datum
Central Meridian is 104° 19' 60.00000 W

Coordinates are relative to: 64
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.10°

Separation Factor Plot

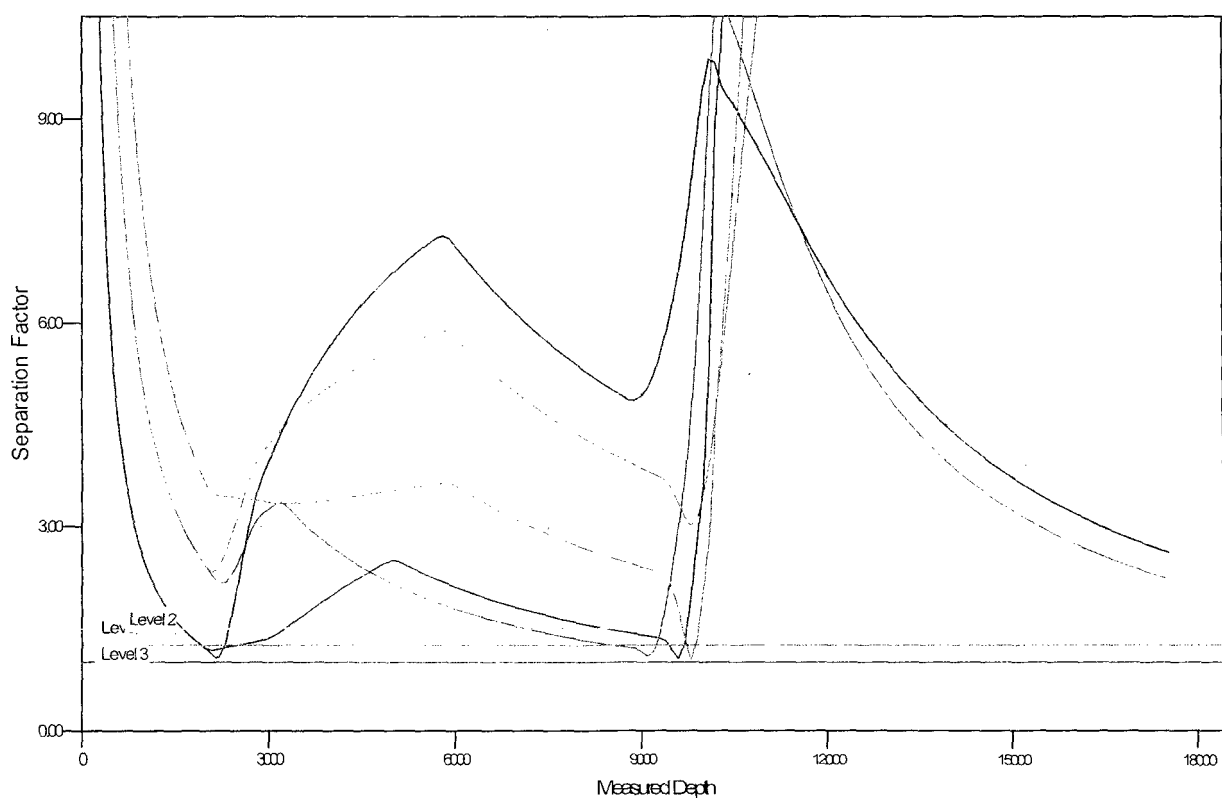


LEGEND

63, OH, Plan 1 12-19-16 V0 62, OH, Plan 1 12-19-16 V0 61, OH, Plan 1 12-19-16 V0
66, OH, Plan 1 12-19-16 V0 65, OH, Plan 1 12-19-16 V0



Project: Eddy County, NM (NAD27 NME)
Site: HH CE 35 2 Fed
Well: 64
Wellbore: OH
Design: Plan 1 12-19-16
Rig:



WELL DETAILS

Ground Level:	3145.00	Latitude	104° 9' 11.7022" N
Easting:	55537.00	Longitude	104° 9' 11.7022" W

SECTION DETAILS

Sec	MD	Inc	Asi	N/S	TVD	+E/W	Disp	Target	Annulation
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	KOP1, Begin 2.00°/100' Build
2	2000.00	0.00	0.00	0.00	2000.00	0.00	0.00	0.00	Hold 3.00° Inc at 90.00° Azm
3	2150.00	3.00	90.00	0.00	2148.93	0.00	3.93	2.00	Begin 2.00°/100' Drop
4	2725.00	0.00	0.00	0.00	2724.14	0.00	34.02	0.00	Begin Vertical Hold
5	2875.00	0.00	0.00	0.00	2874.07	0.00	37.96	2.00	Begin 2.00°/100' Build
6	2975.00	0.00	0.00	0.00	2974.07	0.00	40.90	0.00	Hold 3.00° Inc at 90.00° Azm
7	10217.37	90.00	1.00	9890.00	572.87	47.84	10.94	0.00	LP - HH CE 35 2 Fed 64
8	10357.14	90.00	3.78	9890.00	711.90	53.75	2.00	90.00	Begin 2.00°/100' Turn
9	12512.93	90.00	3.78	9890.00	2863.00	196.00	0.00	0.00	Hold 3.00° Inc at 90.00° Azm
10	12769.67	90.00	358.65	9890.00	3119.60	201.45	2.00	-80.00	Hold 358.65° Azm
11	17537.40	90.00	358.65	9890.00	7886.00	89.00	0.00	0.00	TD at 17537.40

DESIGN TARGET DETAILS


Name	N/S	TVD	+E/W	North	East	Longitude
BHL - HH CE 35 2 Fed 64	9890.00	7886.00	89.00	402768.00	55535.00	104° 9' 11.7022" W
FTP - HH CE 35 2 Fed 64	9890.00	201.00	48.00	395083.00	55316.00	104° 9' 11.7022" W
LTP - HH CE 35 2 Fed 64	9890.00	7886.00	90.00	402718.00	55867.00	104° 9' 11.7022" W
MP - HH CE 35 2 Fed 64	9890.00	2863.00	196.00	397745.00	55963.00	104° 9' 11.7022" W

CASING DETAILS

No casing data is available


LEGEND

- 63, OH, Plan 1 12-19-16 V0
- 66, OH, Plan 1 12-19-16 V0
- 62, OH, Plan 1 12-19-16 V0
- 65, OH, Plan 1 12-19-16 V0
- 61, OH, Plan 1 12-19-16 V0
- Plan 1 12-19-16



Q1 - K1 @ 3170.00ft
Ground Level: 3145.00

KOP1, Begin 2.00°/100' Build
Hold 3.00° Inc at 90.00° Azm
Begin 2.00°/100' Drop
Begin Vertical Hold

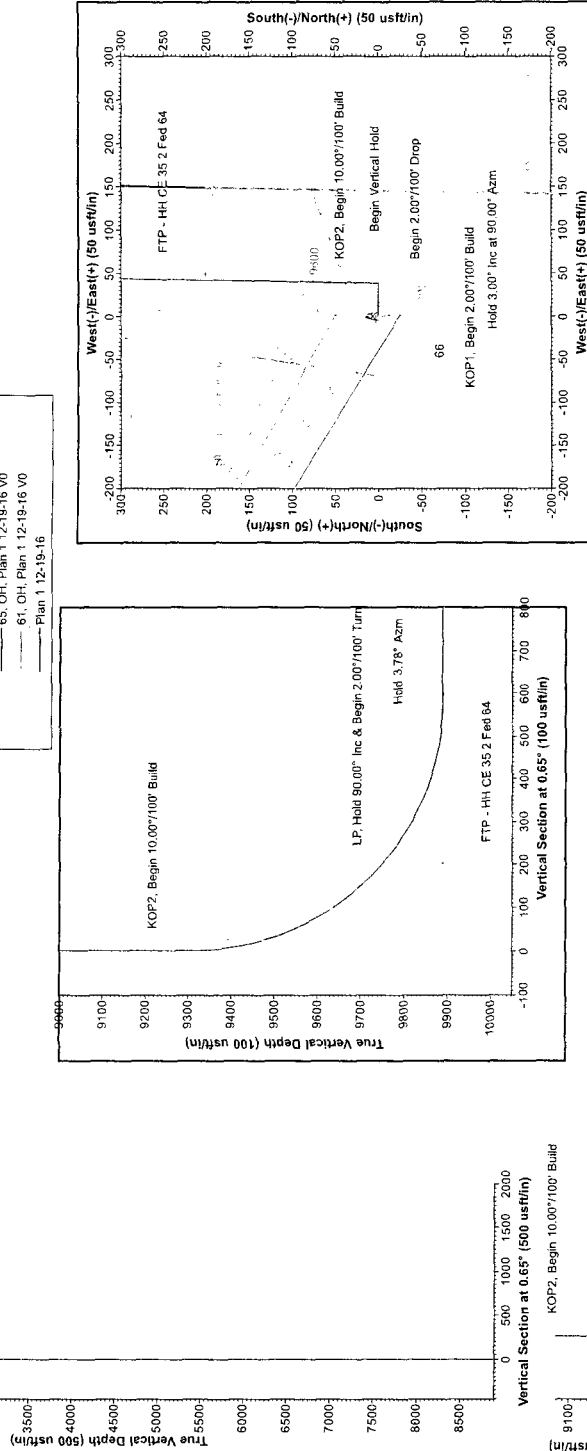

Vertical Section at 0.65° (500 usft/in)

LP, Hold 90.00° Inc & Begin 2.00°/100' Turn
Hold 3.78° Azm

Begin 2.00°/100' Turn
Hold 358.65° Azm

TD at 17537.40

FTP - HH CE 35 2 Fed 64

MP - HH CE 35 2 Fed 64

LTP - HH CE 35 2 Fed 64

BHL - HH CE 35 2 Fed 64

Vertical Section at 0.65° (350 usft/in)

Vertical Section at 0.65° (500 usft/in)



Chevron

Eddy County, NM (NAD27 NME)

HH CE 35 2 Fed

64

OH

Plan: Plan 1 12-19-16

Standard Planning Report

20 December, 2016





Phoenix Technology Services LP

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Site: HH CE 35 2 Fed
 Well: 64
 Wellbore: OH
 Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Project	Eddy County, NM (NAD27 NME)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site HH CE 35 2 Fed

Site Position: Northing: 394,832.00 usft Latitude: 32° 5' 7.37159 N
 From: Map Easting: 555,766.00 usft Longitude: 104° 9' 11.78281 W
 Position Uncertainty: 0.00 usft Slot Radius: 13-3/16 " Grid Convergence: 0.10 °

Well 64

Well Position: +N/-S 50.00 usft Northing: 394,882.00 usft Latitude: 32° 5' 7.86640 N
 +E/-W 1.00 usft Easting: 555,767.00 usft Longitude: 104° 9' 11.77022 W
 Position Uncertainty: 0.00 usft Wellhead Elevation: 0.00 usft Ground Level: 3,145.00 usft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	12/19/2016	7.40	59.85	48,095

Design Plan 1 12-19-16

Audit Notes:

Version: Phase: PROTOTYPE Tie On Depth: 0.00

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	0.65

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,150.00	3.00	90.00	2,149.93	0.00	3.93	2.00	2.00	0.00	90.00	
2,725.00	3.00	90.00	2,724.14	0.00	34.02	0.00	0.00	0.00	0.00	
2,875.00	0.00	0.00	2,874.07	0.00	37.95	2.00	-2.00	-60.00	-180.00	
9,317.97	0.00	0.00	9,317.05	0.00	37.95	0.00	0.00	0.00	0.00	
10,217.97	90.00	1.00	9,890.00	572.87	47.94	10.00	10.00	0.00	1.00	
10,357.14	90.00	3.78	9,890.00	711.90	53.75	2.00	0.00	2.00	90.00	
12,512.93	90.00	3.78	9,890.00	2,863.00	196.00	0.00	0.00	0.00	0.00	MP - HH CE 35 2 Fed
12,769.67	90.00	358.65	9,890.00	3,119.60	201.45	2.00	0.00	-2.00	-90.00	
17,537.40	90.00	358.65	9,890.00	7,886.00	89.00	0.00	0.00	0.00	0.00	BHL - HH CE 35 2 Fe



Phoenix Technology Services LP

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Site: HH CE 35 2 Fed
 Well: 64
 Wellbore: OH
 Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP1, Begin 2.00°/100' Build									
2,100.00	2.00	90.00	2,099.98	0.00	1.75	0.02	2.00	2.00	0.00
2,150.00	3.00	90.00	2,149.93	0.00	3.93	0.04	2.00	2.00	0.00
Hold 3.00° Inc at 90.00° Azm									
2,200.00	3.00	90.00	2,199.86	0.00	6.54	0.07	0.00	0.00	0.00
2,300.00	3.00	90.00	2,299.73	0.00	11.78	0.13	0.00	0.00	0.00
2,400.00	3.00	90.00	2,399.59	0.00	17.01	0.19	0.00	0.00	0.00
2,500.00	3.00	90.00	2,499.45	0.00	22.24	0.25	0.00	0.00	0.00
2,600.00	3.00	90.00	2,599.31	0.00	27.48	0.31	0.00	0.00	0.00
2,700.00	3.00	90.00	2,699.18	0.00	32.71	0.37	0.00	0.00	0.00
2,725.00	3.00	90.00	2,724.14	0.00	34.02	0.38	0.00	0.00	0.00
Begin 2.00°/100' Drop									
2,800.00	1.50	90.00	2,799.08	0.00	36.96	0.42	2.00	-2.00	0.00
2,875.00	0.00	0.00	2,874.07	0.00	37.95	0.43	2.00	-2.00	-120.00
Begin Vertical Hold									
9,317.97	0.00	0.00	9,317.05	0.00	37.95	0.43	0.00	0.00	0.00
KOP2, Begin 10.00°/100' Build									
9,400.00	8.20	1.00	9,398.80	5.86	38.05	6.29	10.00	10.00	1.22
9,500.00	18.20	1.00	9,496.03	28.67	38.45	29.10	10.00	10.00	0.00
9,600.00	28.20	1.00	9,587.82	68.01	39.13	68.45	10.00	10.00	0.00
9,700.00	38.20	1.00	9,671.39	122.69	40.09	123.14	10.00	10.00	0.00
9,800.00	48.20	1.00	9,744.19	191.06	41.28	191.51	10.00	10.00	0.00
9,900.00	58.20	1.00	9,804.01	271.02	42.68	271.48	10.00	10.00	0.00
10,000.00	68.20	1.00	9,849.04	360.15	44.23	360.63	10.00	10.00	0.00
10,100.00	78.20	1.00	9,877.90	455.75	45.90	456.24	10.00	10.00	0.00
10,200.00	88.20	1.00	9,889.72	554.91	47.63	555.41	10.00	10.00	0.00
10,217.97	90.00	1.00	9,890.00	572.87	47.94	573.38	10.00	10.00	0.00
LP, Hold 90.00° Inc & Begin 2.00°/100' Turn									
10,300.00	90.00	2.64	9,890.00	654.86	50.55	655.39	2.00	0.00	2.00
10,357.14	90.00	3.78	9,890.00	711.90	53.75	712.46	2.00	0.00	2.00
Hold 3.78° Azm									
10,400.00	90.00	3.78	9,890.00	754.67	56.58	755.26	0.00	0.00	0.00
10,500.00	90.00	3.78	9,890.00	854.45	63.18	855.11	0.00	0.00	0.00
10,600.00	90.00	3.78	9,890.00	954.24	69.78	954.96	0.00	0.00	0.00
10,700.00	90.00	3.78	9,890.00	1,054.02	76.38	1,054.81	0.00	0.00	0.00
10,800.00	90.00	3.78	9,890.00	1,153.80	82.97	1,154.66	0.00	0.00	0.00
10,900.00	90.00	3.78	9,890.00	1,253.58	89.57	1,254.51	0.00	0.00	0.00
11,000.00	90.00	3.78	9,890.00	1,353.36	96.17	1,354.36	0.00	0.00	0.00
11,100.00	90.00	3.78	9,890.00	1,453.15	102.77	1,454.21	0.00	0.00	0.00
11,200.00	90.00	3.78	9,890.00	1,552.93	109.37	1,554.06	0.00	0.00	0.00
11,300.00	90.00	3.78	9,890.00	1,652.71	115.97	1,653.91	0.00	0.00	0.00
11,400.00	90.00	3.78	9,890.00	1,752.49	122.56	1,753.76	0.00	0.00	0.00
11,500.00	90.00	3.78	9,890.00	1,852.28	129.16	1,853.61	0.00	0.00	0.00
11,600.00	90.00	3.78	9,890.00	1,952.06	135.76	1,953.46	0.00	0.00	0.00
11,700.00	90.00	3.78	9,890.00	2,051.84	142.36	2,053.32	0.00	0.00	0.00
11,800.00	90.00	3.78	9,890.00	2,151.62	148.96	2,153.17	0.00	0.00	0.00
11,900.00	90.00	3.78	9,890.00	2,251.40	155.56	2,253.02	0.00	0.00	0.00
12,000.00	90.00	3.78	9,890.00	2,351.19	162.15	2,352.87	0.00	0.00	0.00
12,100.00	90.00	3.78	9,890.00	2,450.97	168.75	2,452.72	0.00	0.00	0.00
12,200.00	90.00	3.78	9,890.00	2,550.75	175.35	2,552.57	0.00	0.00	0.00
12,300.00	90.00	3.78	9,890.00	2,650.53	181.95	2,652.42	0.00	0.00	0.00



Phoenix Technology Services LP

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Site: HH CE 35 2 Fed
 Well: 64
 Wellbore: OH
 Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,400.00	90.00	3.78	9,890.00	2,750.31	188.55	2,752.27	0.00	0.00	0.00
12,500.00	90.00	3.78	9,890.00	2,850.10	195.15	2,852.12	0.00	0.00	0.00
12,512.93	90.00	3.78	9,890.00	2,863.00	196.00	2,865.03	0.00	0.00	0.00
Begin 2.00°/100' Turn									
12,600.00	90.00	2.04	9,890.00	2,949.95	200.42	2,952.03	2.00	0.00	-2.00
12,700.00	90.00	0.04	9,890.00	3,049.93	202.24	3,052.02	2.00	0.00	-2.00
12,769.67	90.00	358.65	9,890.00	3,119.60	201.45	3,121.67	2.00	0.00	-2.00
Hold 358.65° Azm									
12,800.00	90.00	358.65	9,890.00	3,149.92	200.73	3,151.98	0.00	0.00	0.00
12,900.00	90.00	358.65	9,890.00	3,249.89	198.37	3,251.92	0.00	0.00	0.00
13,000.00	90.00	358.65	9,890.00	3,349.86	196.01	3,351.86	0.00	0.00	0.00
13,100.00	90.00	358.65	9,890.00	3,449.83	193.66	3,451.80	0.00	0.00	0.00
13,200.00	90.00	358.65	9,890.00	3,549.80	191.30	3,551.74	0.00	0.00	0.00
13,300.00	90.00	358.65	9,890.00	3,649.78	188.94	3,651.68	0.00	0.00	0.00
13,400.00	90.00	358.65	9,890.00	3,749.75	186.58	3,751.62	0.00	0.00	0.00
13,500.00	90.00	358.65	9,890.00	3,849.72	184.22	3,851.55	0.00	0.00	0.00
13,600.00	90.00	358.65	9,890.00	3,949.69	181.86	3,951.49	0.00	0.00	0.00
13,700.00	90.00	358.65	9,890.00	4,049.67	179.50	4,051.43	0.00	0.00	0.00
13,800.00	90.00	358.65	9,890.00	4,149.64	177.15	4,151.37	0.00	0.00	0.00
13,900.00	90.00	358.65	9,890.00	4,249.61	174.79	4,251.31	0.00	0.00	0.00
14,000.00	90.00	358.65	9,890.00	4,349.58	172.43	4,351.25	0.00	0.00	0.00
14,100.00	90.00	358.65	9,890.00	4,449.55	170.07	4,451.19	0.00	0.00	0.00
14,200.00	90.00	358.65	9,890.00	4,549.53	167.71	4,551.13	0.00	0.00	0.00
14,300.00	90.00	358.65	9,890.00	4,649.50	165.35	4,651.07	0.00	0.00	0.00
14,400.00	90.00	358.65	9,890.00	4,749.47	163.00	4,751.01	0.00	0.00	0.00
14,500.00	90.00	358.65	9,890.00	4,849.44	160.64	4,850.95	0.00	0.00	0.00
14,600.00	90.00	358.65	9,890.00	4,949.41	158.28	4,950.89	0.00	0.00	0.00
14,700.00	90.00	358.65	9,890.00	5,049.39	155.92	5,050.83	0.00	0.00	0.00
14,800.00	90.00	358.65	9,890.00	5,149.36	153.56	5,150.76	0.00	0.00	0.00
14,900.00	90.00	358.65	9,890.00	5,249.33	151.20	5,250.70	0.00	0.00	0.00
15,000.00	90.00	358.65	9,890.00	5,349.30	148.84	5,350.64	0.00	0.00	0.00
15,100.00	90.00	358.65	9,890.00	5,449.28	146.49	5,450.58	0.00	0.00	0.00
15,200.00	90.00	358.65	9,890.00	5,549.25	144.13	5,550.52	0.00	0.00	0.00
15,300.00	90.00	358.65	9,890.00	5,649.22	141.77	5,650.46	0.00	0.00	0.00
15,400.00	90.00	358.65	9,890.00	5,749.19	139.41	5,750.40	0.00	0.00	0.00
15,500.00	90.00	358.65	9,890.00	5,849.16	137.05	5,850.34	0.00	0.00	0.00
15,600.00	90.00	358.65	9,890.00	5,949.14	134.69	5,950.28	0.00	0.00	0.00
15,700.00	90.00	358.65	9,890.00	6,049.11	132.33	6,050.22	0.00	0.00	0.00
15,800.00	90.00	358.65	9,890.00	6,149.08	129.98	6,150.16	0.00	0.00	0.00
15,900.00	90.00	358.65	9,890.00	6,249.05	127.62	6,250.10	0.00	0.00	0.00
16,000.00	90.00	358.65	9,890.00	6,349.03	125.26	6,350.03	0.00	0.00	0.00
16,100.00	90.00	358.65	9,890.00	6,449.00	122.90	6,449.97	0.00	0.00	0.00
16,200.00	90.00	358.65	9,890.00	6,548.97	120.54	6,549.91	0.00	0.00	0.00
16,300.00	90.00	358.65	9,890.00	6,648.94	118.18	6,649.85	0.00	0.00	0.00
16,400.00	90.00	358.65	9,890.00	6,748.91	115.83	6,749.79	0.00	0.00	0.00
16,500.00	90.00	358.65	9,890.00	6,848.89	113.47	6,849.73	0.00	0.00	0.00
16,600.00	90.00	358.65	9,890.00	6,948.86	111.11	6,949.67	0.00	0.00	0.00
16,700.00	90.00	358.65	9,890.00	7,048.83	108.75	7,049.61	0.00	0.00	0.00
16,800.00	90.00	358.65	9,890.00	7,148.80	106.39	7,149.55	0.00	0.00	0.00
16,900.00	90.00	358.65	9,890.00	7,248.78	104.03	7,249.49	0.00	0.00	0.00
17,000.00	90.00	358.65	9,890.00	7,348.75	101.67	7,349.43	0.00	0.00	0.00
17,100.00	90.00	358.65	9,890.00	7,448.72	99.32	7,449.37	0.00	0.00	0.00
17,200.00	90.00	358.65	9,890.00	7,548.69	96.96	7,549.31	0.00	0.00	0.00
17,300.00	90.00	358.65	9,890.00	7,648.66	94.60	7,649.24	0.00	0.00	0.00



Phoenix Technology Services LP

Planning Report



Database: Compass 5000 GCR
 Company: Chevron
 Project: Eddy County, NM (NAD27 NME)
 Site: HH CE 35 2 Fed
 Well: 64
 Wellbore: OH
 Design: Plan 1 12-19-16

Local Co-ordinate Reference: Well 64
 TVD Reference: GL + KB @ 3170.00usft
 MD Reference: GL + KB @ 3170.00usft
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
17,400.00	90.00	358.65	9,890.00	7,748.64	92.24	7,749.18	0.00	0.00	0.00
17,500.00	90.00	358.65	9,890.00	7,848.61	89.88	7,849.12	0.00	0.00	0.00
17,537.40	90.00	358.65	9,890.00	7,886.00	89.00	7,886.50	0.00	0.00	0.00
TD at 17537.40									


Design Targets

Target Name	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
FTP - HH CE 35 2 Fed 6 - hit/miss target - Shape - Point	0.00	0.00	9,890.00	201.00	49.00	395,083.00	555,816.00	32° 5' 9.85480 N	104° 9' 11.19675 W
- plan misses target center by 110.61usft at 9895.53usft MD (9801.64 TVD, 267.23 N, 42.61 E)									
LTP - HH CE 35 2 Fed 6 - plan misses target center by 0.18usft at 17487.39usft MD (9890.00 TVD, 7836.00 N, 90.18 E) - Point	0.00	0.00	9,890.00	7,836.00	90.00	402,718.00	555,857.00	32° 6' 25.41417 N	104° 9' 10.57169 W
MP - HH CE 35 2 Fed 6 - plan hits target center - Point	0.00	0.00	9,890.00	2,863.00	196.00	397,745.00	555,963.00	32° 5' 36.19697 N	104° 9' 9.43619 W
BHL - HH CE 35 2 Fed 6 - plan hits target center - Point	0.00	0.00	9,890.00	7,886.00	89.00	402,768.00	555,856.00	32° 6' 25.90902 N	104° 9' 10.58235 W

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Comment
2,000.00	2,000.00	0.00	0.00	KOP1, Begin 2.00°/100' Build
2,150.00	2,149.93	0.00	3.93	Hold 3.00° Inc at 90.00° Azm
2,725.00	2,724.14	0.00	34.02	Begin 2.00°/100' Drop
2,875.00	2,874.07	0.00	37.95	Begin Vertical Hold
9,317.97	9,317.05	0.00	37.95	KOP2, Begin 10.00°/100' Build
10,217.97	9,890.00	572.87	47.94	LP, Hold 90.00° Inc & Begin 2.00°/100' Turn
10,357.14	9,890.00	711.90	53.75	Hold 3.78° Azm
12,512.93	9,890.00	2,863.00	196.00	Begin 2.00°/100' Turn
12,769.67	9,890.00	3,119.60	201.45	Hold 358.65° Azm
17,537.40	9,890.00	7,886.00	89.00	TD at 17537.40

Generic Hayhurst Development Pad Layout - Phase 1

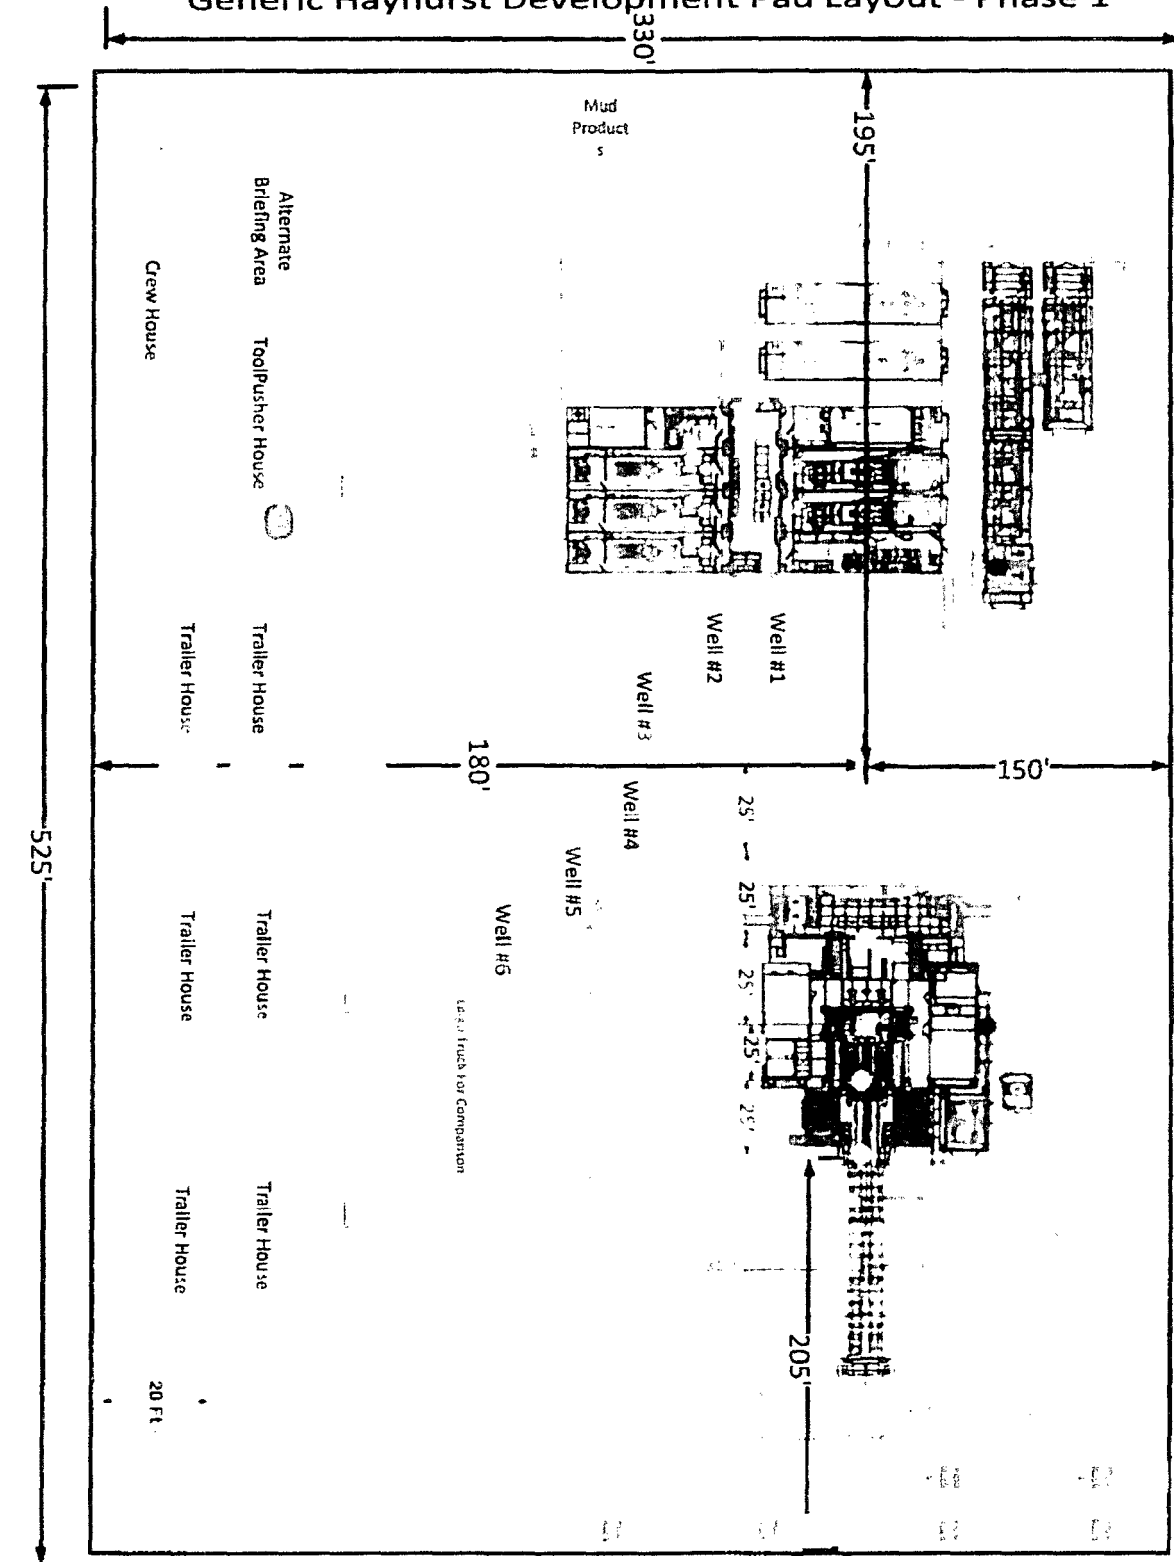

Location
Entrance

Legend


- H2S Monitor
- Flag


- H2S Monitor Locations**
- Dog/Cellar
 - Rig Floor
 - Driven Shed
 - Cat Nipple

- Flag Locations**
- Dog/Cellar
 - Rig Floor
 - Dog House

- 10 Minute Escape Packs**
- 1st Pits
 - 1st Trip Tank
 - 1st Accumulator
 - 4th Rig Floor

- 45 Minute Escape Packs**
- 2nd Briefing Area
 - 2nd Alternate Briefing Area

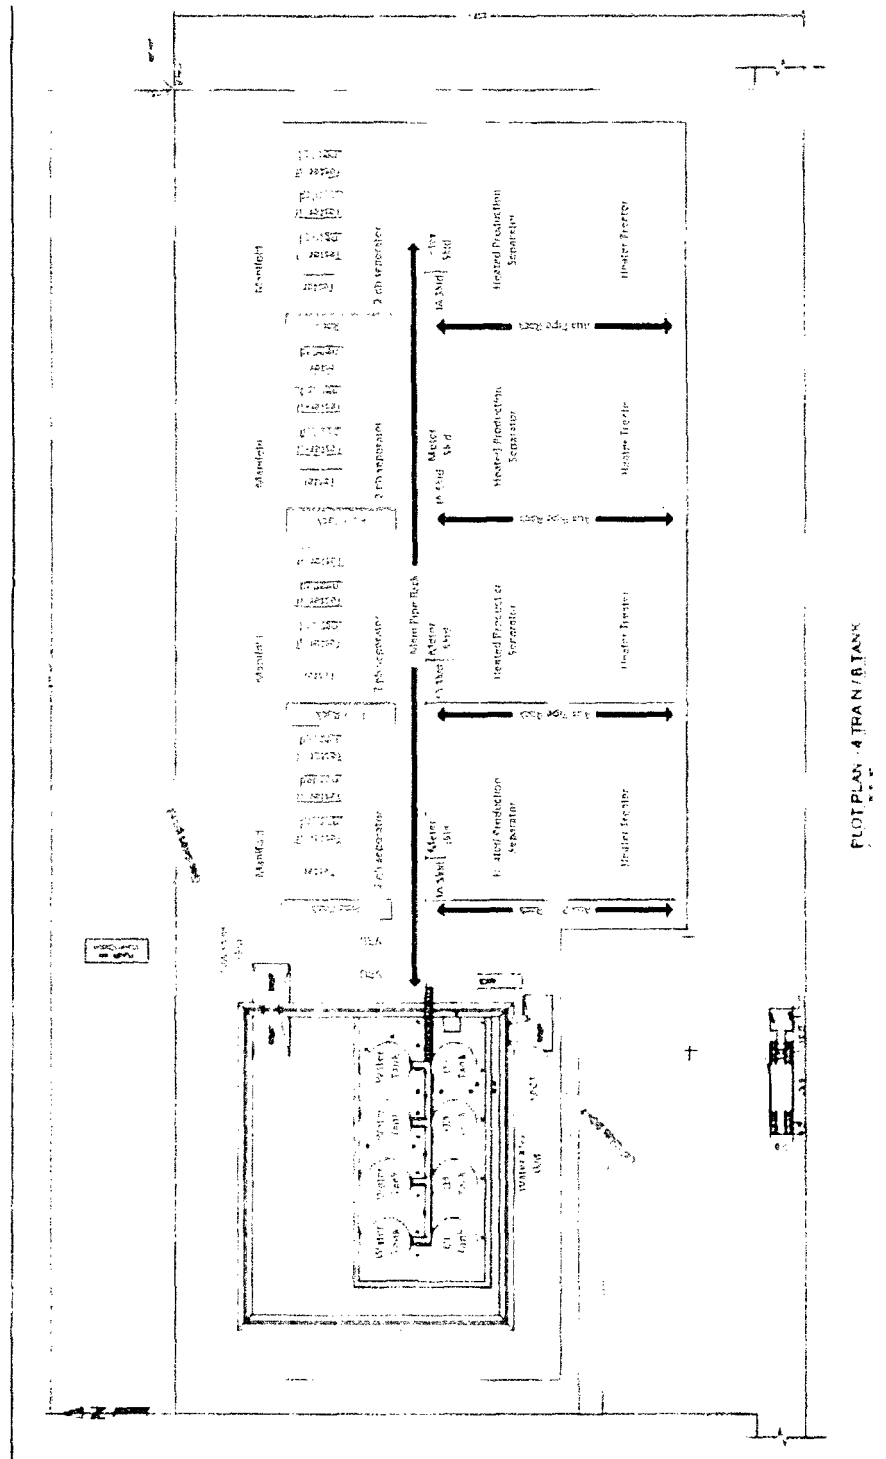

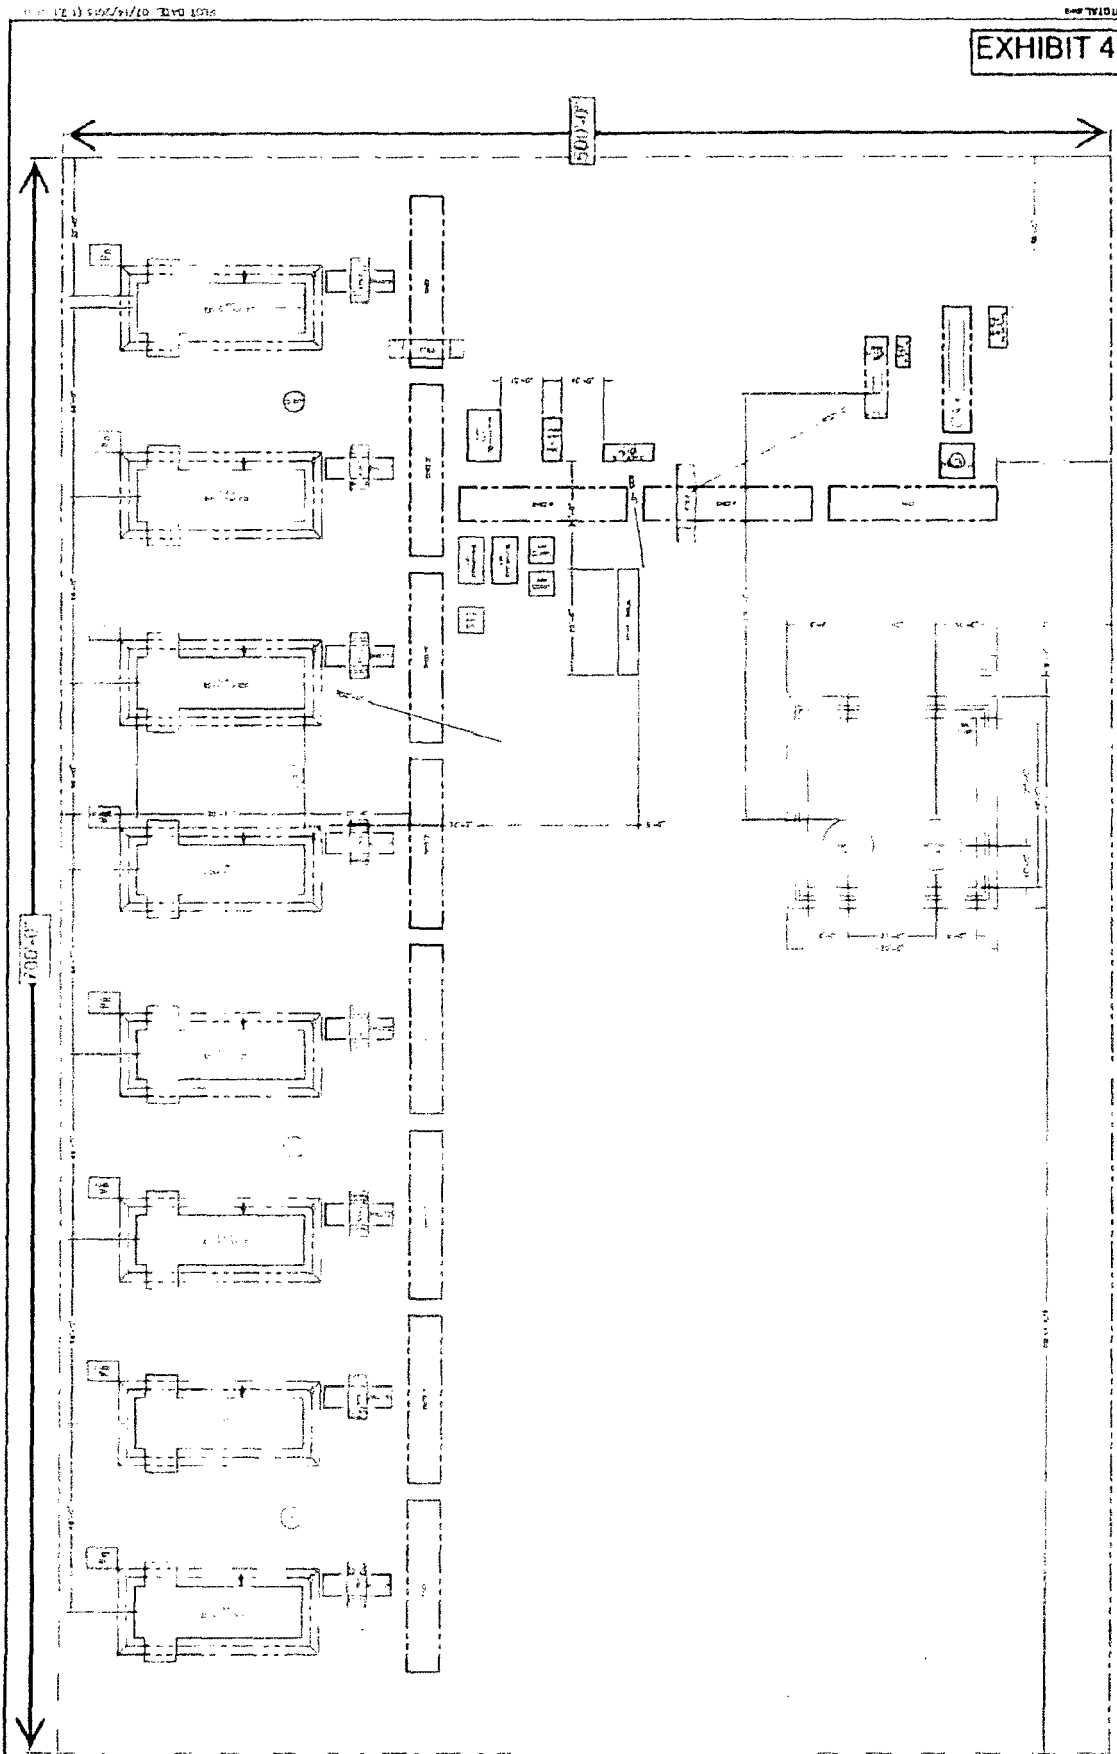

ISSUED FOR REVIEW APPROVED BY: [Signature] DATE: 8/1/13		Chevron U.S.A. Inc. STANDARD COMPRESSOR GAS-LIFT STATION PLOT PLAN - 8 COMPRESSOR LAYOUT COMPRESSOR_PLOTPLAN_8TOTAL	FOR REVIEW
---	--	--	------------

APD ID: 10400009362

Submission Date: 12/22/2016

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

Section 1 - Existing Roads

Will existing roads be used? YES

Existing Road Map:

HH CE 35 2 FED 64_Roads_12-21-2016.pdf

Existing Road Purpose: ACCESS,FLUID TRANSPORT

Row(s) Exist? NO

ROW ID(s)

ID:

Do the existing roads need to be improved? YES

Existing Road Improvement Description: repair any pot holes, clear ditches, repair crown

Existing Road Improvement Attachment:

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES

New Road Map:

HH CE 35 2 FED 64_New Roads_12-21-2016.pdf

New road type: LOCAL

Length: 4034.49 Feet

Width (ft.): 24

Max slope (%): 2

Max grade (%): 3

Army Corp of Engineers (ACOE) permit required? NO

ACOE Permit Number(s):

New road travel width: 24

New road access erosion control: see surface use plan

New road access plan or profile prepared? NO

New road access plan attachment:

Access road engineering design? NO

Access road engineering design attachment:

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Access surfacing type: NONE

Access topsoil source: ONSITE

Access surfacing type description:

Access onsite topsoil source depth: 0

Offsite topsoil source description:

Onsite topsoil removal process: none needed

Access other construction information:

Access miscellaneous information:

Number of access turnouts:

Access turnout map:

Drainage Control

New road drainage crossing: CROSSING,CULVERT,OTHER

Drainage Control comments: Sediment traps (hay bales suggested by BLM)

Road Drainage Control Structures (DCS) description: see surface use plan

Road Drainage Control Structures (DCS) attachment:

Access Additional Attachments

Additional Attachment(s):

Section 3 - Location of Existing Wells

Existing Wells Map? YES

Attach Well map:

HH CE 35 2 FED 64_Radius Map_12-21-2016.pdf

Existing Wells description:

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? SUBMIT

Estimated Production Facilities description:

Production Facilities description: Facilities: New production facilities located in the NE corner of Sec. 35, T26S-R27E where oil and gas sales will take place.

Production Facilities map:

HH_CE_35_2_FED_64_FAC_CTB___Redlined_Plot_Plan__11x17__06-09-2017.pdf

Section 5 - Location and Types of Water Supply

Water Source Table

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Water source use type: INTERMEDIATE/PRODUCTION CASING,
SURFACE CASING

Water source type: GW WELL

Describe type:

Source latitude:

Source longitude:

Source datum:

Water source permit type: PRIVATE CONTRACT

Source land ownership: FEDERAL

Water source transport method: PIPELINE

Source transportation land ownership: FEDERAL

Water source volume (barrels): 775006.3

Source volume (acre-feet): 99.89297

Source volume (gal): 32550266

Water source and transportation map:

HH_CE_35_2_FED_64_FAC_CTB___Redlined_Plot_Plan__11x17__06-09-2017.pdf

Water source comments:

New water well? NO

New Water Well Info

Well latitude:

Well Longitude:

Well datum:

Well target aquifer:

Est. depth to top of aquifer(ft):

Est thickness of aquifer:

Aquifer comments:

Aquifer documentation:

Well depth (ft):

Well casing type:

Well casing outside diameter (in.):

Well casing inside diameter (in.):

New water well casing?

Used casing source:

Drilling method:

Drill material:

Grout material:

Grout depth:

Casing length (ft.):

Casing top depth (ft.):

Well Production type:

Completion Method:

Water well additional information:

State appropriation permit:

Additional information attachment:

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Section 6 - Construction Materials

Construction Materials description: Caliche will be sourced from a Chevron operated NMSLO pit in S2 NW4 Section 16 T26S R27E or an alternate private pit in Section 13, T24S R27E in Eddy County, NM.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: GARBAGE

Waste content description: garbage & trash see SUPO Page 7 in the (MDP pages 579-590).

Amount of waste: 200 pounds

Waste disposal frequency : Daily

Safe containment description: will be collected in a trash container and disposed of at a state approved facility

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** STATE

Disposal type description:

Disposal location description: State approved facility

Reserve Pit

Reserve Pit being used? NO

Temporary disposal of produced water into reserve pit?

Reserve pit length (ft.) **Reserve pit width (ft.)**

Reserve pit depth (ft.) **Reserve pit volume (cu. yd.)**

Is at least 50% of the reserve pit in cut?

Reserve pit liner

Reserve pit liner specifications and installation description

Cuttings Area

Cuttings Area being used? NO

Are you storing cuttings on location? NO

Description of cuttings location

Cuttings area length (ft.) **Cuttings area width (ft.)**

Cuttings area depth (ft.) **Cuttings area volume (cu. yd.)**

Is at least 50% of the cuttings area in cut?

WCuttings area liner

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Cuttings area liner specifications and installation description

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: NO

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

HH CE 35 2 FED 64_Well Plat_12-21-2016.pdf

HH CE 35 2 FED 64_Well Pad Layout_12-21-2016.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: NEW

Recontouring attachment:

HH CE 35 2 FED 64_APD SUPO_12-21-2016.pdf

Drainage/Erosion control construction: Proper erosion control methods will be used on the area to control erosion, runoff, and siltation of the surrounding area.

Drainage/Erosion control reclamation: The well pad, road, and surrounding area will be cleared of material, trash, and equipment. All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.

Wellpad long term disturbance (acres): 1.5

Wellpad short term disturbance (acres): 4.5

Access road long term disturbance (acres): 1.85

Access road short term disturbance (acres): 1.85

Pipeline long term disturbance (acres): 0.0022038568

Pipeline short term disturbance (acres): 0.0022038568

Other long term disturbance (acres): 0

Other short term disturbance (acres): 0

Total long term disturbance: 3.3522038

Total short term disturbance: 6.352204

Reconstruction method: surface use plan

Topsoil redistribution: surface use plan

Soil treatment: surface use plan

Existing Vegetation at the well pad: mesquite, shrubs, grass

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: mesquite, shrubs, grass

Existing Vegetation Community at the road attachment:

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Existing Vegetation Community at the pipeline: mesquite, shrubs, grass

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: mesquite, shrubs, grass

Existing Vegetation Community at other disturbances attachment:

Non native seed used? NO

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? NO

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation? NO

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed type:

Seed source:

Seed name:

Source name:

Source address:

Source phone:

Seed cultivar:

Seed use location:

PLS pounds per acre:

Proposed seeding season:

Seed Summary

Total pounds/Acre:

Seed Type	Pounds/Acre
------------------	--------------------

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

First Name: Kevin

Last Name: Dickerson

Phone:

Email: lfuh@chevron.com

Seedbed prep:

Seed BMP:

Seed method:

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

Existing invasive species? NO

Existing invasive species treatment description:

Existing invasive species treatment attachment:

Weed treatment plan description: see surface use plan in the hayhurst development area

Weed treatment plan attachment:

Monitoring plan description: see surface use plan in the hayhurst development area

Monitoring plan attachment:

Success standards: As per BLM requirements

Pit closure description: None

Pit closure attachment:

Section 11 - Surface Ownership

Disturbance type: WELL PAD

Describe:

Surface Owner: BUREAU OF LAND MANAGEMENT

Other surface owner description:

BIA Local Office:

BOR Local Office:

COE Local Office:

DOD Local Office:

NPS Local Office:

State Local Office:

Military Local Office:

USFWS Local Office:

Other Local Office:

USFS Region:

USFS Forest/Grassland:

USFS Ranger District:

Section 12 - Other Information

Right of Way needed? YES

Use APD as ROW? YES

ROW Type(s): 287001 ROW – Water Facility, 288100 ROW – O&G Pipeline, Other

Operator Name: CHEVRON USA INCORPORATED

Well Name: HH CE 35 2 FED

Well Number: 64

ROW Applications


SUPO Additional Information:

Use a previously conducted onsite? YES

Previous Onsite information: On-site performed by BLM NRS Paul Murphy


Other SUPO Attachment

From HWY 285 (Pecos Hwy), head West on Whites City Road for approximately 7.1 miles to a Lease road on the North side of Whites City Road. Head North on said Lease road for approximately 1.59 miles to the proposed access road on South side of Lease road.



ROBERT L. LASTRAPES
NEW MEXICO
23006
12-16-2016
Robert L. Lastrapes
Registration No 23006

SCALE: 1" = 2000'



- Proposed Well
- Proposed Access Road
- Proposed Drillsite
- Existing Road
- Section Line
- Existing Frac Pond

CHEVRON U.S.A. INC.
HH CE 35 2 FED NO. 64 WELL
LOCATED 2440' FSL AND 475' FEL
SECTION 35, T25S-R27E
EDDY COUNTY, NEW MEXICO



C H Fenstermaker & Associates, L L C
135 Regency Sq Lafayette, LA 70508
Ph 337-237-2200 Fax 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN

REVISIONS

PROJ. MGR.: GDG

No.

DATE:

REVISÉD BY:

DATE: 12/12/2016

No


DATE:

REVISED BY:

FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 APD.dwg

R 27 E

T
25
S

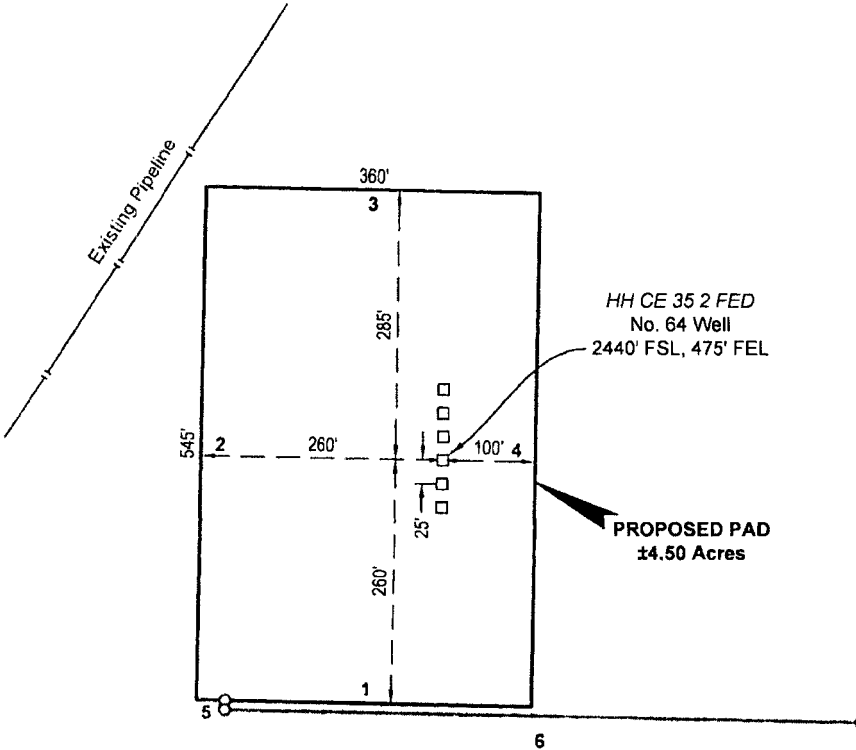

Sec. 35

Bureau of Land Management
±4.50 Acres- Proposed Pad
±2,856.46', ±173.12 Rods,
±1.31 Acres- Proposed Access Road

CENTERLINE
PROPOSED
ACCESS ROAD
20' X ±4,034.49'
±244.51 Rods
±1.85 Acres

NW PAD CORNER		NE PAD CORNER	
X=	555,512 NAD 27	X=	555,872 NAD 27
Y=	395,172	Y=	395,166
ELEVATION +3142' NAVD 88		ELEVATION +3141' NAVD 88	
SW PAD CORNER		SE PAD CORNER	
X=	555,502 NAD 27	X=	555,862 NAD 27
Y=	394,627	Y=	394,621
ELEVATION +3150' NAVD 88		ELEVATION +3146' NAVD 88	


HH CE 35 2 FED NO. 64 WELL	
X=	555,767 NAD 27
Y=	394,882
LAT.	32.085519
LONG.	104.153269
X=	596,951 NAD83
Y=	394,940
LAT.	32.085642
LONG.	104.153761
ELEVATION +3145' NAVD 88	

Sec. 36

LEGEND

	Proposed Pad
	Proposed Access
	Section Line
	Utility Line
	Pipeline
	Existing R.O.W.


FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC.
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.

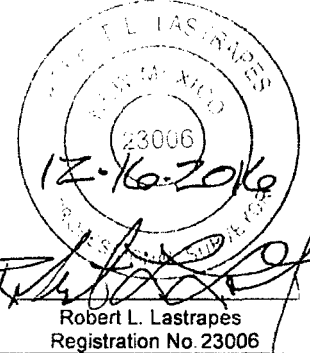

Scale: 1" = 200'

PAGE 1 OF 3

SURFACE USE PLAT



CHEVRON U.S.A. INC.

PROPOSED PAD & ACCESS ROAD

HH CE 35 2 FED NO. 64 WELL

SECTION 35, T25S-R27E & SECTION 2, T26S-R27E

EDDY COUNTY, NEW MEXICO



C. H. Fenstermaker & Associates, L.L.C.
135 Regency Sq. Lafayette, LA 70508
Ph. 337-237-2200 Fax. 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN

REVISIONS

PROJ. MGR.: GDG

No.

DATE:

REVISED BY:

DATE: 12/12/2016

No.


DATE:

REVISED BY:

FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg

LEGEND	
	Proposed Pad
	Proposed Access
	Section Line
	Utility Line
	Pipeline
	Fenceline
	Existing R.O.W
	Existing Road
	End. Monument

FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC.
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.



Robert L. Lastrapes
Registration No. 23006

SEE PAGE
1 OF 3

Sec. 35

Bureau of Land Management
±4.50 Acres- Proposed Pad
±2,856.46', ±173.12 Rods.
±1.31 Acres- Proposed Access Road

CENTERLINE
PROPOSED
ACCESS ROAD
20' X ±4,034.49'
±244.51 Rods
±1.85 Acres

N 08° 46' 20" W - 2,203.24'
to SE Corner of Drill Pad

Sec. 36

Skeen 2 26-27 ST
4H Pad

End 1 1/2" Iron
Pipe w/Cap at
the SE Corner
of Section 35

T25S-R27E

T26S-R27E

Existing 14' Wide Lease Road

Sec. 2

NE / NE
State of New Mexico
±1,178.03', ±71.39 Rods.
±0.54 Acres- Proposed Access Road

Sec. 1



Scale: 1" = 500'

500' 0 250' 500'

PAGE 2 OF 3

SURFACE USE PLAT

CHEVRON U.S.A. INC.
PROPOSED PAD & ACCESS ROAD
HH CE 35 2 FED NO. 64 WELL
SECTION 35, T25S-R27E & SECTION 2, T26S-R27E
EDDY COUNTY, NEW MEXICO



C. H. Fenstermaker & Associates, L.L.C.
135 Regency Sq. Lafayette, LA 70508
Ph. 337-237-2200 Fax. 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN

REVISIONS

PROJ. MGR.: GDG

No.

DATE:

REVISED BY:

DATE: 12/12/2016

No.

DATE:

REVISED BY:

FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg

DISCLAIMER: At this time, C. H. Fenstermaker & Associates, L.L.C. has not performed nor was asked to perform any type of engineering, hydrological modeling, flood plain, or "No Rise" certification analyses, including but not limited to determining whether the project will impact flood hazards in connection with federal/FEMA, state, and/or local laws, ordinances and regulations. Accordingly, Fenstermaker makes no warranty or representation of any kind as to the foregoing issues, and persons or entities using this information shall do so at their own risk.

NOTE:

Please be advised, that while reasonable efforts are made to locate and verify pipelines and anomalies using our standard pipeline locating equipment, it is impossible to be 100 % effective. As such, we advise using caution when performing work as there is a possibility that pipelines and other hazards, such as fiber optic cables, PVC pipelines, etc. may exist undetected on site.


NOTE:

Many states maintain information centers that establish links between those who dig (excavators) and those who own and operate underground facilities (operators). It is advisable and in most states, law, for the contractor to contact the center for assistance in locating and marking underground utilities. For guidance: New Mexico One Call. www.nmonecall.org

PROPOSED PAD		
COURSE	BEARING	DISTANCE
1	N 88° 58' 29" W	360.00'
2	N 01° 01' 31" E	545.00'
3	S 88° 58' 29" E	360.00'
4	S 01° 01' 31" W	545.00'

CENTERLINE PROPOSED ACCESS ROAD		
COURSE	BEARING	DISTANCE
5	S 00° 49' 37" W	10.09'
6	S 88° 58' 40" E	684.96'
7	S 01° 01' 34" W	2161.41'
8	S 00° 30' 12" W	384.92'
9	N 89° 57' 38" W	602.95'
10	N 84° 52' 17" W	190.16'

FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC.
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.


 Robert L. Lastrapes
 Registration No. 23006

PAGE 3 OF 3


SURFACE USE PLAT


CHEVRON U.S.A. INC.
 PROPOSED PAD & ACCESS ROAD
 HH CE 35 2 FED NO. 64 WELL
 SECTION 35, T25S-R27E & SECTION 2, T26S-R27E
 EDDY COUNTY, NEW MEXICO



C H Fenstermaker & Associates, L.L.C.
 135 Regency Sq. Lafayette, LA 70508
 Ph. 337-237-2200 Fax. 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN		REVISIONS	
PROJ. MGR.: GDG	No.	DATE:	REVISED BY:
DATE: 12/12/2016	No.	DATE:	REVISED BY:
FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg			

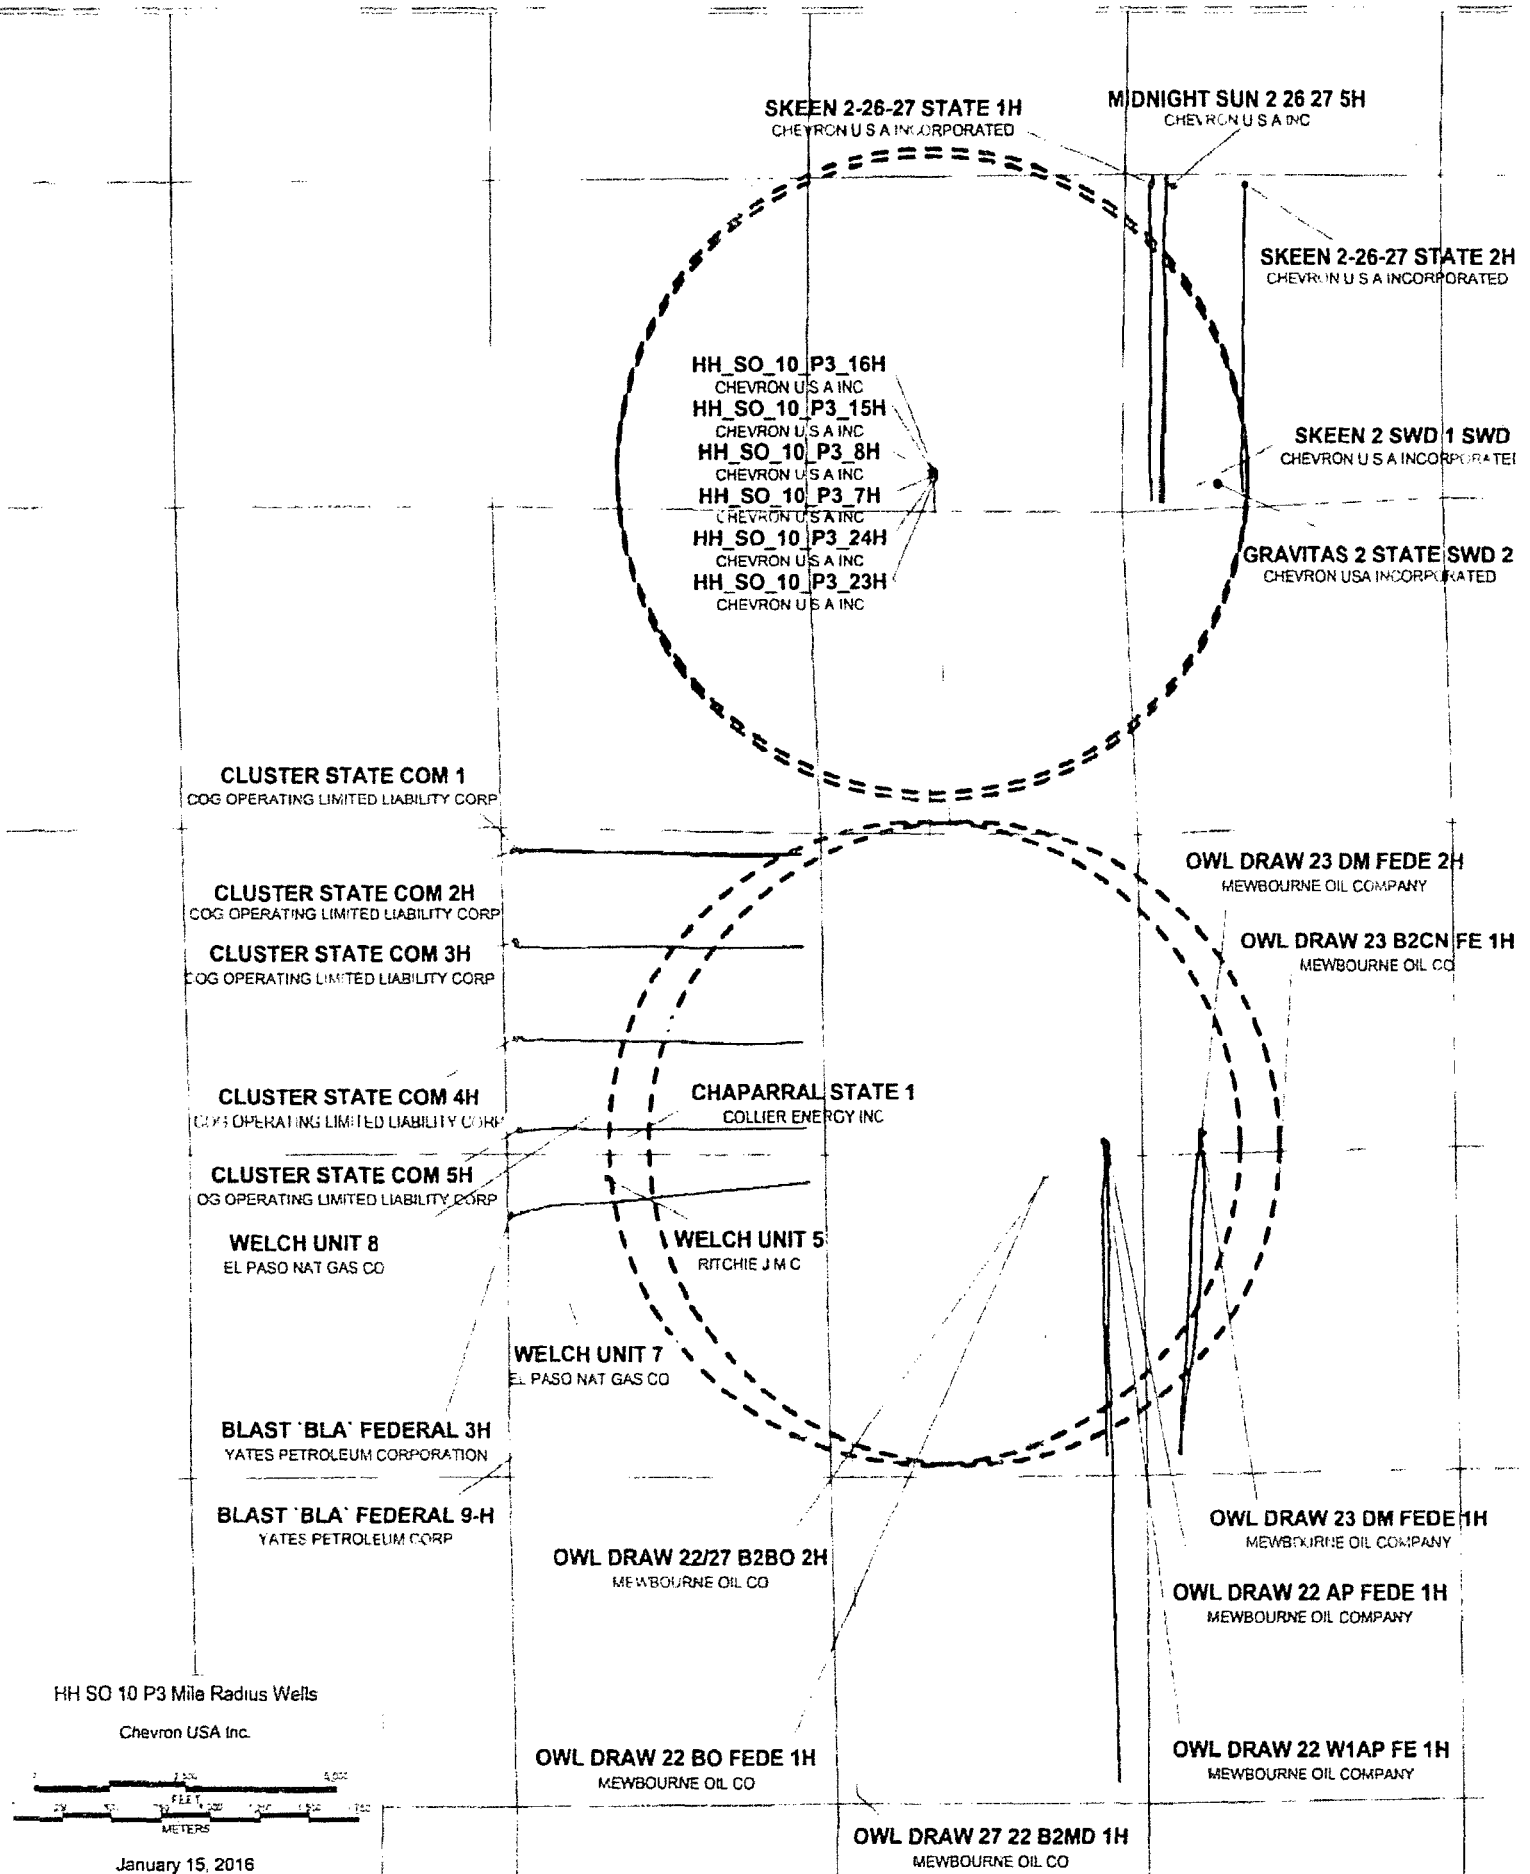

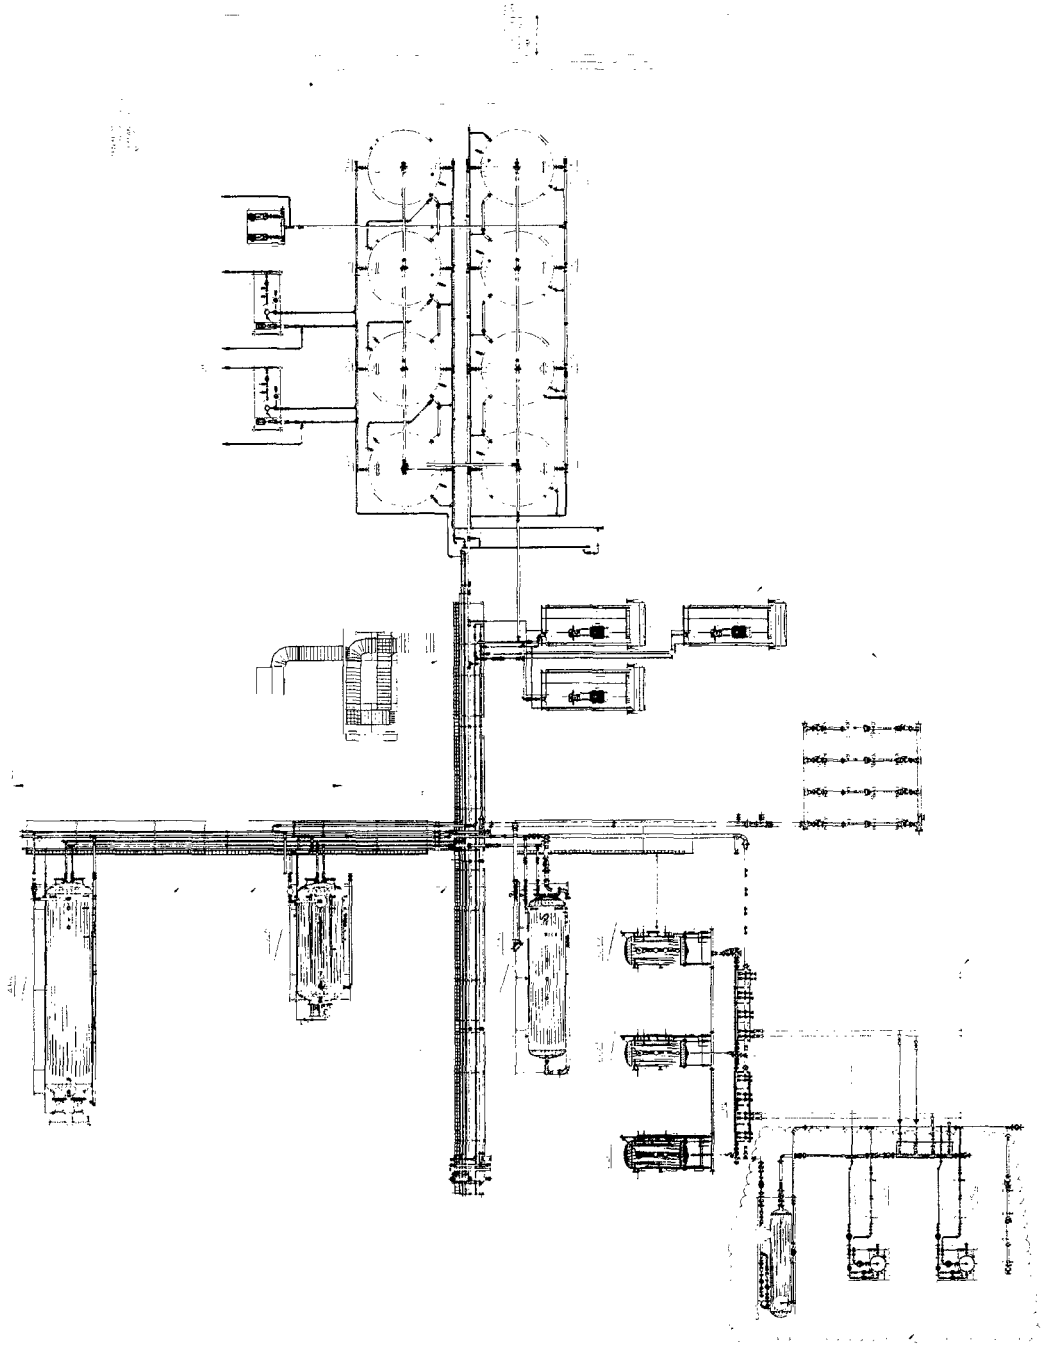


Chevron U.S.A. Inc.

FOR REVIEW

HNH-HNMS10STB-PRO-GEN-0010-001


R 27 E

T
25
S

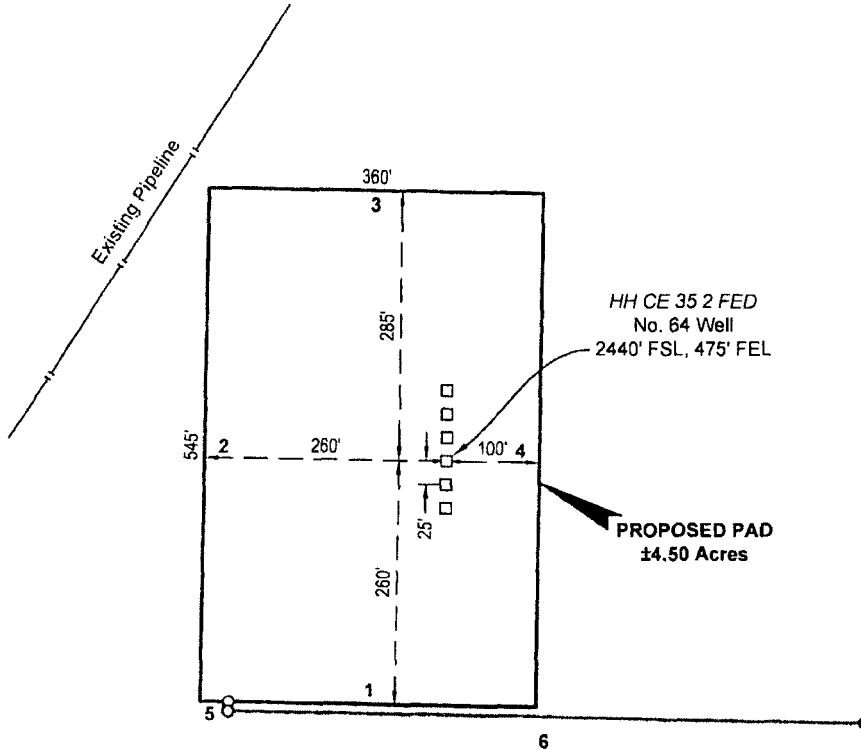

Sec. 35
Bureau of Land Management
±4.50 Acres- Proposed Pad
±2,856.46', ±173.12 Rods,
±1.31 Acres- Proposed Access Road

**CENTERLINE
PROPOSED
ACCESS ROAD**
20' X ±4,034.49'
±244.51 Rods
±1.85 Acres

NW PAD CORNER		NE PAD CORNER	
X=	555,512 NAD 27	X=	555,872 NAD 27
Y=	395,172	Y=	395,166
ELEVATION +3142' NAVD 88		ELEVATION +3141' NAVD 88	
SW PAD CORNER		SE PAD CORNER	
X=	555,502 NAD 27	X=	555,862 NAD 27
Y=	394,627	Y=	394,621
ELEVATION +3150' NAVD 88		ELEVATION +3146' NAVD 88	
		HH CE 35 2 FED NO. 64 WELL	
		X=	555,767 NAD 27
		Y=	394,882
		LAT.	32.085519
		LONG.	104.153269
		X=	596,951 NAD83
		Y=	394,940
		LAT.	32.085642
LONG	104.153761		
		ELEVATION +3145' NAVD 88	

Sec. 36


LEGEND	
	Proposed Pad
	Proposed Access
	Section Line
	Utility Line
	Pipeline
	Existing R O W

FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC.
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.



Robert L. Lastrapes
Registration No. 23006

Scale: 1" = 200'



PAGE 1 OF 3

SURFACE USE PLAT

CHEVRON U.S.A. INC.
PROPOSED PAD & ACCESS ROAD
HH CE 35 2 FED NO. 64 WELL
SECTION 35, T25S-R27E & SECTION 2, T26S-R27E
EDDY COUNTY, NEW MEXICO




C. H. Fenstermaker & Associates, L.L.C.
135 Regency Sq Lafayette, LA 70508
Ph. 337-237-2200 Fax. 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN		REVISIONS	
PROJ. MGR.: GDG	No.	DATE:	REVISED BY:
DATE: 12/12/2016	No.	DATE:	REVISED BY:
FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg			

LEGEND	
	Proposed Pad
	Proposed Access
	Section Line
	Utility Line
	Pipeline
	Fence Line
	Existing R.O.W
	Existing Road
	Fnd. Monument

FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.



Robert L. Lastrapes
Registration No. 23006

SEE PAGE
1 OF 3

Sec. 35

Bureau of Land Management
±4.50 Acres- Proposed Pad
±2,856.46', ±173.12 Rods,
±1.31 Acres- Proposed Access Road

CENTERLINE
PROPOSED
ACCESS ROAD
20' X ±4,034.49'
±244.51 Rods
±1.85 Acres

N 08° 46' 20" W - 2,203.24'
to SE Corner of Drill Pad

Sec. 36

Skeen 2 26-27 ST
4H Pad

Fnd 1½" Iron
Pipe w/Cap at
the SE Corner
of Section 35

T25S-R27E

T26S-R27E

Existing 14' Wide Lease Road

Sec. 2

NE / NE
State of New Mexico
±1,178.03', ±71.39 Rods,
±0.54 Acres- Proposed Access Road

Sec. 1

Scale: 1" = 500'

PAGE 2 OF 3

SURFACE USE PLAT

500' 0 250' 500'

CHEVRON U.S.A. INC.
PROPOSED PAD & ACCESS ROAD
HH CE 35 2 FED NO. 64 WELL
SECTION 35, T25S-R27E & SECTION 2, T26S-R27E
EDDY COUNTY, NEW MEXICO



C. H. Fenstermaker & Associates, L.L.C.
135 Regency Sq Lafayette, LA 70508
Ph. 337-237-2200 Fax 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN

REVISIONS

PROJ. MGR.: GDG

No.

DATE:

REVISED BY:

DATE: 12/12/2016

No.

DATE:

REVISED BY:

FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg

DISCLAIMER: At this time, C. H. Fenstermaker & Associates, L.L.C. has not performed nor was asked to perform any type of engineering, hydrological modeling, flood plain, or "No Rise" certification analyses, including but not limited to determining whether the project will impact flood hazards in connection with federal/FEMA, state, and/or local laws, ordinances and regulations. Accordingly, Fenstermaker makes no warranty or representation of any kind as to the foregoing issues, and persons or entities using this information shall do so at their own risk.

NOTE:

Please be advised, that while reasonable efforts are made to locate and verify pipelines and anomalies using our standard pipeline locating equipment, it is impossible to be 100 % effective. As such, we advise using caution when performing work as there is a possibility that pipelines and other hazards, such as fiber optic cables, PVC pipelines, etc may exist undetected on site.


NOTE:

Many states maintain information centers that establish links between those who dig (excavators) and those who own and operate underground facilities (operators). It is advisable and in most states, law, for the contractor to contact the center for assistance in locating and marking underground utilities. For guidance: New Mexico One Call. www.nmonecall.org

PROPOSED PAD		
COURSE	BEARING	DISTANCE
1	N 88° 58' 29" W	360.00'
2	N 01° 01' 31" E	545.00'
3	S 88° 58' 29" E	360.00'
4	S 01° 01' 31" W	545.00'

CENTERLINE PROPOSED ACCESS ROAD		
COURSE	BEARING	DISTANCE
5	S 00° 49' 37" W	10.09'
6	S 88° 58' 40" E	684.96'
7	S 01° 01' 34" W	2161.41'
8	S 00° 30' 12" W	384.92'
9	N 89° 57' 38" W	602.95'
10	N 84° 52' 17" W	190.16'

FOR THE EXCLUSIVE USE OF
CHEVRON U.S.A. INC.
I, Robert L. Lastrapes, Professional
Surveyor, do hereby state this plat is true
and correct to the best of my knowledge.


 Robert L. Lastrapes
 Registration No. 23006

PAGE 3 OF 3

SURFACE USE PLAT


CHEVRON U.S.A. INC.
 PROPOSED PAD & ACCESS ROAD
 HH CE 35 2 FED NO. 64 WELL
 SECTION 35, T25S-R27E & SECTION 2, T26S-R27E
 EDDY COUNTY, NEW MEXICO



C. H. Fenstermaker & Associates, L.L.C.
135 Regency Sq. Lafayette, LA 70508
Ph 337-237-2200 Fax. 337-232-3299
www.fenstermaker.com

DRAWN BY: JPLN		REVISIONS	
PROJ. MGR.: GDG	No.	DATE:	REVISED BY:
DATE: 12/12/2016	No.	DATE:	REVISED BY:
FILENAME: T:\2016\2164893\DWG\HH CE 35 2 FED 64 SUP.dwg			

Generic Hayhurst Development Pad Layout - Phase 1

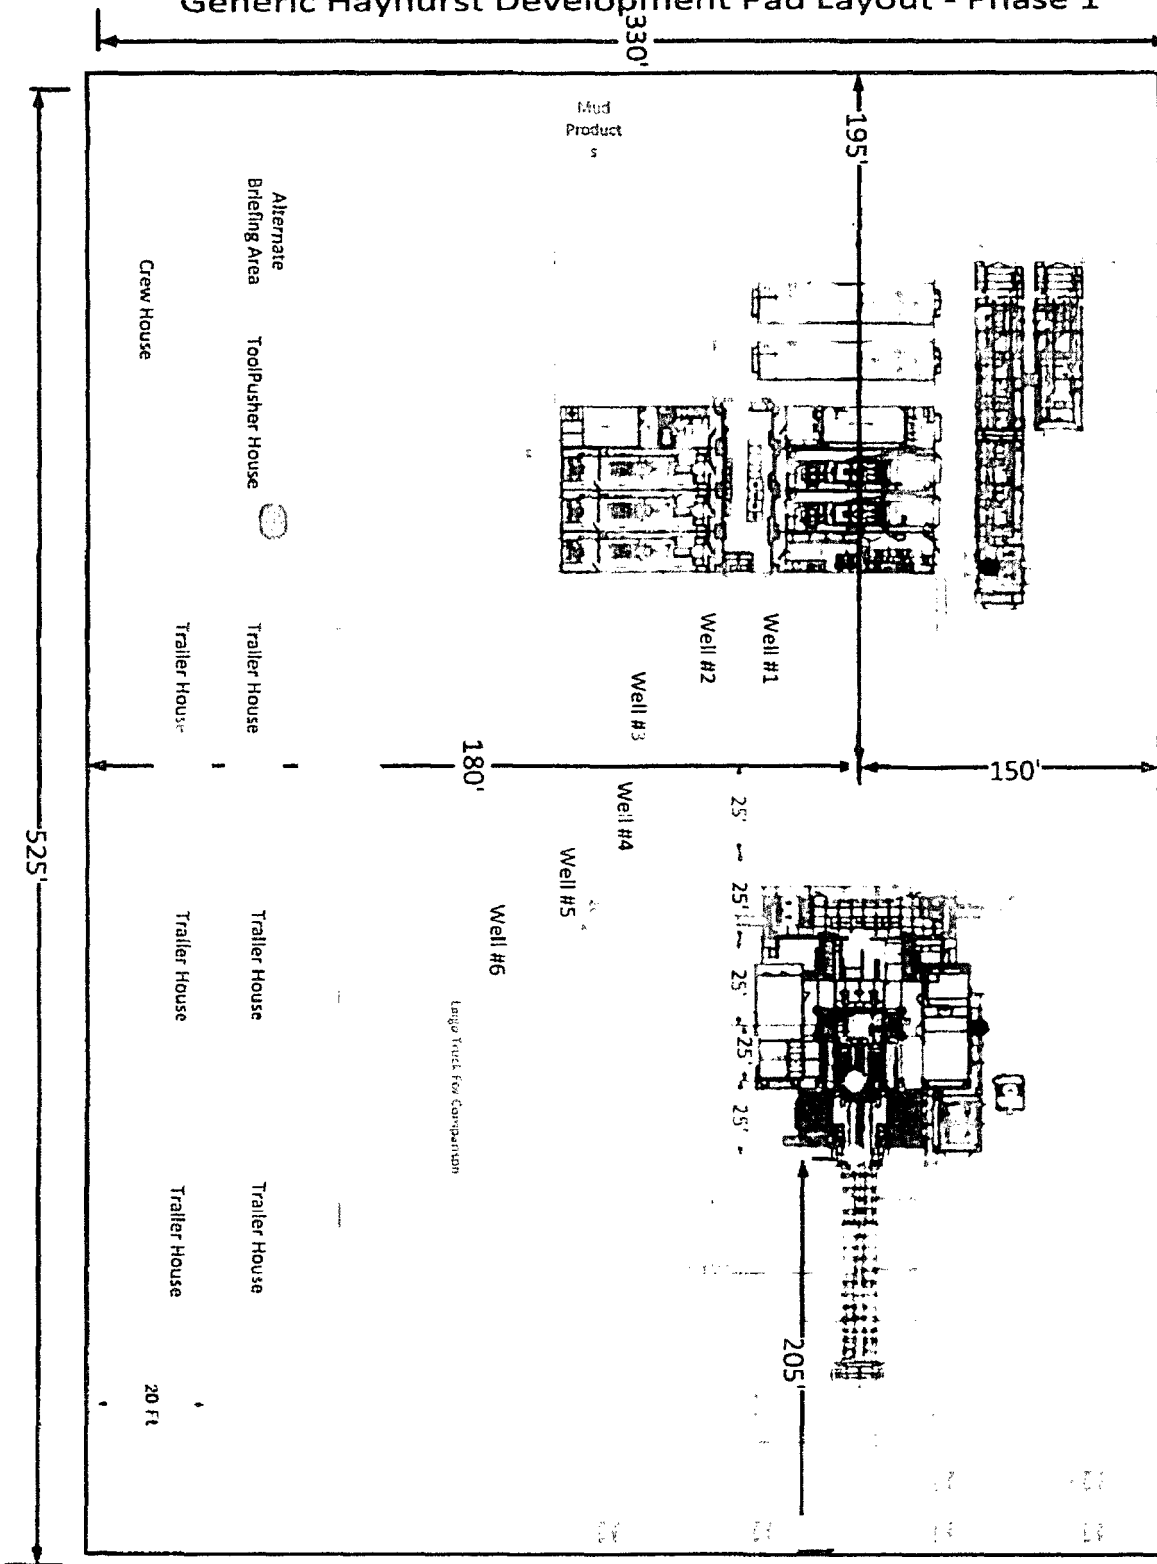

- Legend**
- H2S Monitor
 - Flag

H2S Monitor Locations

- Dog/Cellar
- Pig Floor
- Skid - Skid
- Cell Nipple

Flag Locations


- 5' x 10' Skid
- Pig Floor
- Dog House

10 Minute Escape Packs

- 1 at PLS
- 1 at Telp. Tank
- 1 at Accumulator
- 1 at Pig Floor


45 Minute Escape Packs

- 2 at Briefing Area
- 2 at Alternate Briefing Area

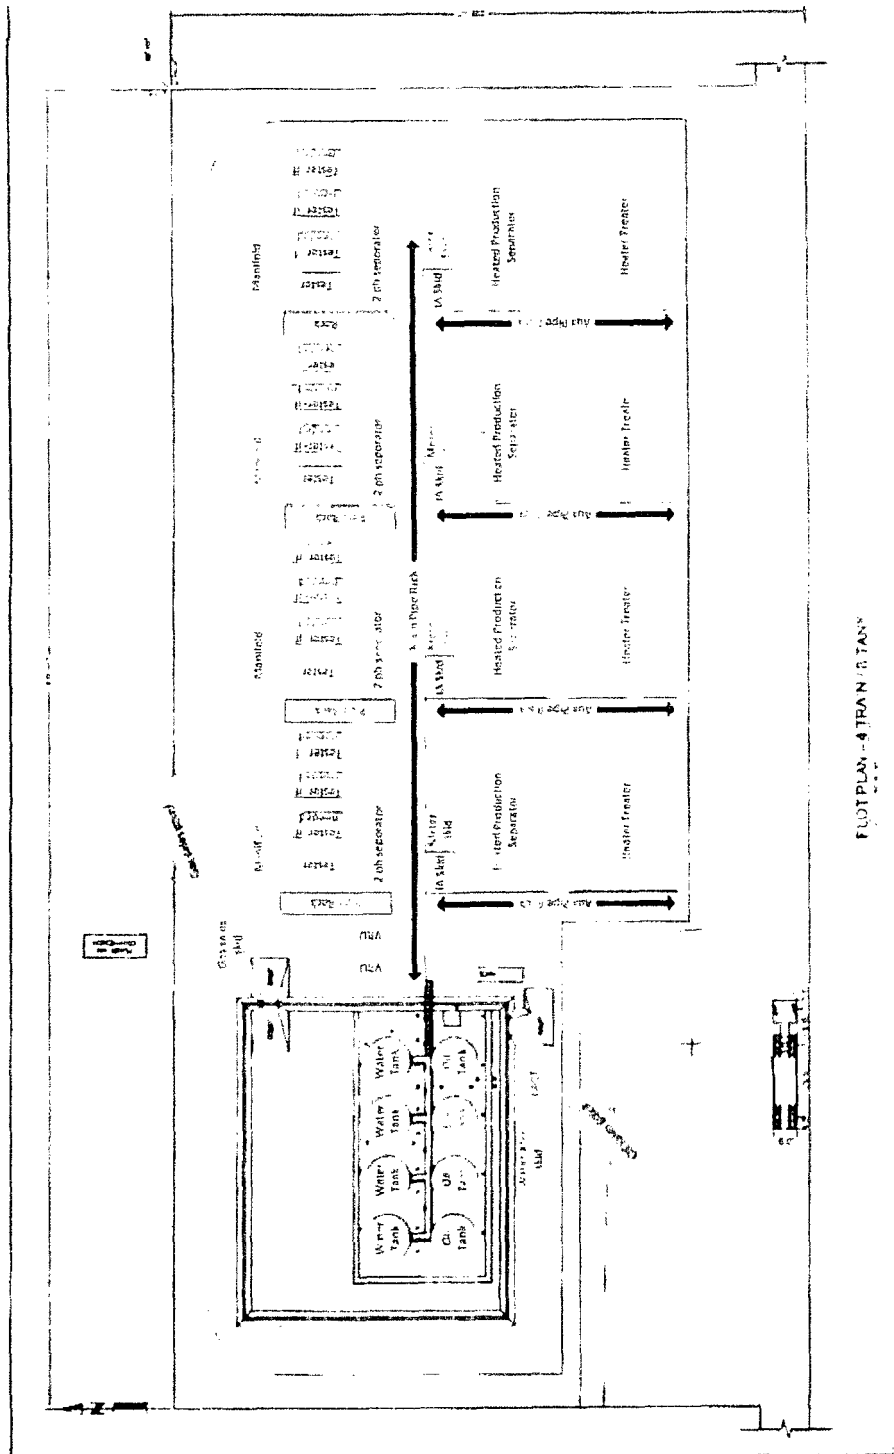

PLANT LAYOUT - 4 TRAIN 15 TANKS

EXHIBIT 4

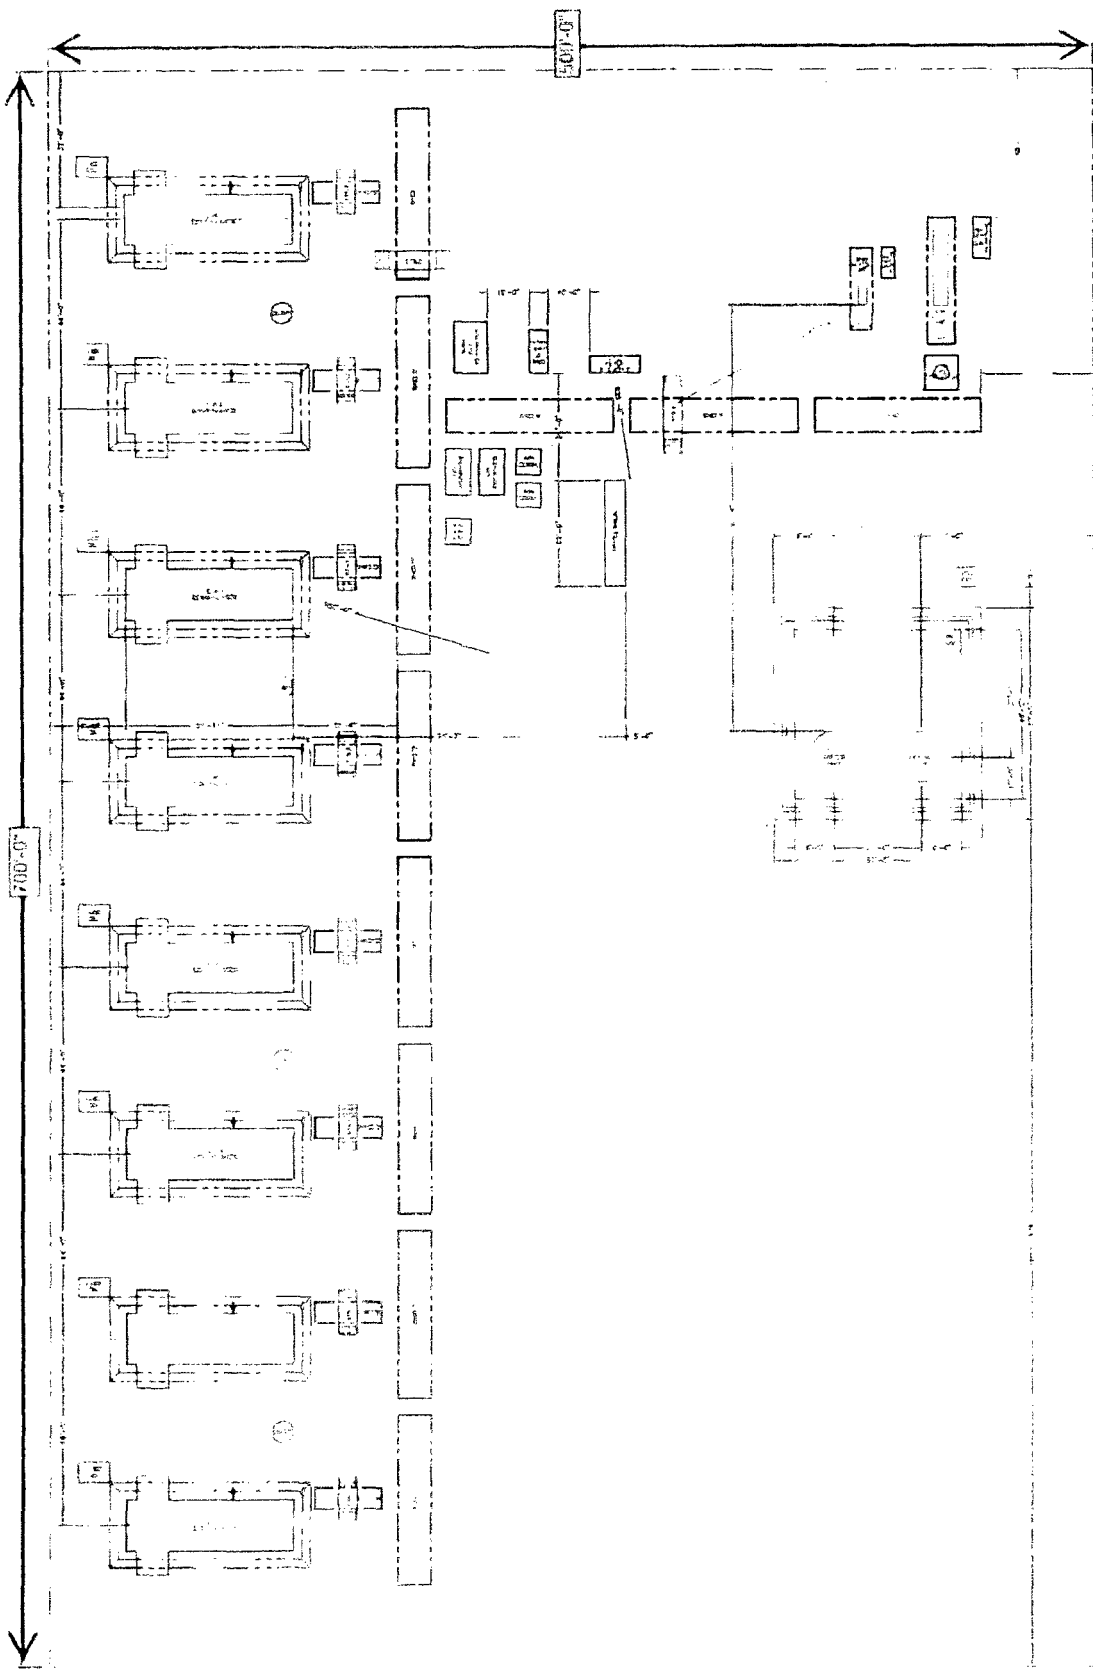

COMPRESSOR STATION - 8 COMPRESSOR LAYOUT

Chevron U.S.A. Inc.		STANDARD COMPRESSOR GAS-LIFT STATION	
FOR REVIEW		PLOT PLAN - 8 COMPRESSOR LAYOUT	
DATE: 07/14/2015		COMPRESSOR_PLOTPLAN_8TOTAL	

Surface Use Plan of Operations

Existing Roads (Exhibit 1 – see Proposed Action Appendix F, Figure F.9)

- Chevron U.S.A. Inc (Chevron) will improve or maintain existing roads in a condition the same as or better than before operations begin. Chevron will repair pot holes, clear ditches, repair the crown, etc. All existing structures on the entire access route such as cattle guards, other range improvement projects, culverts, etc. will be properly repaired or replaced if they are damaged or have deteriorated beyond practical use. Chevron will prevent and abate fugitive dust as needed, whether created by vehicular traffic, equipment operations, or wind events. BLM written approval will be acquired before application of surfactants, binding agents, or other dust suppression chemicals on roadways. Existing lease roads operated by Chevron will be maintained as needed or upon request (based on historical weather data, Chevron expects that maintenance will likely occur four to five times annually). Existing lease roads used by multiple operators will be maintained through road maintenance agreements with all parties.
- Driving Directions – From Carlsbad, NM. The location is approximately 35 miles from Carlsbad, NM. From Carlsbad, proceed south on Highway 285 (Pecos Hwy) for approximately 29 miles and turn right (west) onto Whites City Rd (CR 724). Travel west on Whites City Road for roughly 6 miles.

New or Reconstructed Access Roads – Representative Map (Exhibit 2 – see Proposed Action Appendix F, Figure F.10)

- There will be approximately 20 miles of new access road to be constructed.
- New access road will be upgraded to a crowned and ditched road and will be graveled as needed for drilling. If requested by the surface tenant, upgrading of this portion of the road will be kept to a minimum.
- All new roads (previously improved) will be used “as is” with the exception of minor blading as needed.
- Surfacing material (road base derived from caliche or river rock) will be placed on the access road during construction. All surface disturbing activities will be discussed with and agreed to with the surface tenant.
- Surface disturbance and vehicular travel will be limited to the approved access route. Any additional area will be approved in advance.
- Road width: 24 feet traveling surface
- Construction Easement: no additional construction easement will be required for new roads as they will be constructed within right-of-way corridors
- Maximum Grade: Road gradient less than 8%

CHEVRON U.S.A. Inc
Hayhurst Development Area (HDA)
Master Development Plan

- Turnouts: none required due to 24 feet travelling surface
- Ditch design: Drainage, ditch diversions and outlets shall be placed in roadway and angled away from road at approximately 45 degrees. At each diversion, straw waddles or equivalent will be utilized perpendicular flow.
- Crown design: 2%
- Erosion control: 6" rock under road; roadway water diversions (identified on each APD as applicable), low water crossings, culverts, and water bars where needed; straw waddles will be used on the downslope side of new roads where undisturbed grades away from the roadway are 5% or greater.
- Proposed culverts: Culverts and low water crossings will be installed where applicable; culvert sizing details will be included in each APD's SUP and shown on exhibit.
- Major Cuts and Fills: 2:1 slope until completed, reduce to 3:1 slope during interim reclamation
- Cattle guard(s) will be installed as needed and shown in each APD's SUP and exhibit.
- Storage Placement of Topsoil:
 - Topsoil will be stored on the upslope edge of each disturbance (unless otherwise directed by BLM) no higher than 3 feet, and will be promptly seeded to control erosion, prevent weed establishment and maintain soil microbial activity. Along pipelines and roads, topsoil will be wind-rowed, segregated and stored for later spreading across the disturbed corridor. Topsoil will be promptly seeded to control erosion, prevent weed establishment and maintain soil microbial activity.
 - In areas of high wind or water erosion, staked soil retention blankets will be used in combination with seeding to prevent topsoil erosion. Retention blankets will be a straw/coconut blend (or similar) and will be covered on the top and bottom with 100% fiber netting to reduce entanglement of small animals.
- Chevron will prevent and abate fugitive dust using water trucks as necessary (typically twice each week during drilling, completion, and construction operations and once monthly during operations), whether dust is created by vehicular traffic, equipment operations, or wind events.

Location of Existing Wells (Exhibit 3)

- 1-Mile radius map covering all wells in the HDA is attached
- A localized map will be included with each APD

Location of Existing and/or Proposed Production Facilities (Exhibit 4 – see Proposed Action Appendix F, Figures F.1 through F.8)

- Existing Facilities: No existing facilities will be used for the Proposed Action. The existing Chevron-operated facilities within the HDA are:
 - Cotton Hills 23 CTB: B-S23-T26S-R27E
 - Hayhurst 16 CTB: C-S16-T25S-R27E
 - Hayhurst 17 CTB: D-S17-T25S-R27E

CHEVRON U.S.A. Inc
Hayhurst Development Area (HDA)
Master Development Plan

- Skeen 2 CTB: C-S02-T26S-R27E
- Chevron submits this plan with the reasonable expectation that it will have the flexibility to change the locations and dimensions of any facility, pipeline, or disturbance, so long as the total disturbance remains within the boundary of the HDA EA and the total acreage of disturbance remains equal to or less than that proposed in the HDA Master Development Plan, without the necessity of revising the MDP. Any change in location from those outlined in the HDA MDP will require BLM approval through the APD or Sundry process.
- Proposed Facilities: 16 proposed CTB facilities are located across the HDA:

	Township	Range	Section	Unit Letter ¹	Lease
1	26S	27E	10	A	NMNM 121473
2	25S	27E	9	O	VB 1865 (off-lease)
3	26S	27E	8	P	NMNM 118108
4	25S	27E	35	L	NMNM 107369
5	25S	27E	17	H	NMNM 113954
6	26S	27E	12	E	NMNM 116028
7	25S	27E	35	L	NMNM 107369
8	25S	27E	31	B	NMNM 109756 (off-lease)
9	26S	27E	12	E	NMNM 116028
10	26S	27E	10	B	NMNM 121473
11	26S	27E	12	G	NMNM 116028
12	26S	27E	10	P	NMNM 121473
13	26S	27E	8	O	NMNM 118108
14	25S	27E	35	K	NMNM 107369
15	25S	27E	16	E	NMNM 113954
16	25S	27E	31	B	NMNM 109756 (off-lease)

1. Chevron submits this proposed action with the reasonable expectation that it will have the flexibility relocate facilities within the NEPA "drill island" corridors without the necessity of revising the MDP.

- Open top tanks or open containments will be netted.
- Open vent exhaust stacks will be modified to prevent birds or bats from entering, discourage perching, roosting, and nesting.
- Facilities will have a secondary containment 1.5 times the holding capacity of largest storage tank.
- All above ground structures will be painted non-reflective shale green for blending with surrounding environment.
- The permanent water disposal system will be determined prior to construction of any water transfer pipeline. Until permanent water takeaway is available, produced water will be hauled off location in trucks.

CHEVRON U.S.A. Inc
Hayhurst Development Area (HDA)
Master Development Plan

- Proposed Facilities: 7 proposed compression facilities are located across the HDA:

ID	Township	Range	Section	Unit Letter ¹
1	26S	27E	10	H
2	25S	27E	16	F
3	26S	27E	8	A
4	25S	27E	35	J
5	25S	27E	17	G
6	26S	27E	12	G
7	25S	27E	31	B

1: Chevron submits this proposed action with the reasonable expectation that it will have the flexibility relocate facilities within the NEPA "drill island" corridors without the necessity of revising the MDP.

- Proposed Facilities: 5 proposed SWD facilities are located across the HDA:

ID	Township	Range	Section	Unit Letter ¹
1	26S	27E	2	M
2	25S	27E	16	F
3	25S	27E	26	P
4	26S	27E	12	L
5	26S	27E	2	P

1: Chevron submits this proposed action with the reasonable expectation that it will have the flexibility relocate facilities within the NEPA "drill island" corridors without the necessity of revising the MDP.

- Pipelines: A number of pipelines will be required throughout the HDA:

Pipeline Service	Size (inches)	Length (miles)	Pressure (psig)	Material of Construction	ROW Width (ft) ¹
Gas lift	4	26.2	1100	Flexpipe	4
HP gas gathering ²	12	14.7	1400	Steel	8
HF water ³	12	14.3	200	HDPE	8
Produced water	12	17.8	150	HDPE	4
LP gas gathering	24	22.9	150	Steel	4
Oil gathering ⁴	12	22.9	150	Steel	4
Temp Frac water ⁵	10	TBD ⁵	200	Polyurethane	N/A

1: All ROW also require an additional 10' construction corridor per Table 3 in the Proposed Action

2: HP gas gathering ROW will include some third-party pipelines

3: HF water includes all water to be used for hydraulic fracturing, which may be fresh, brackish or recycled

4: Oil gathering pipeline will be managed by a third party

5: See next section "Location and Types of Water Supply"

- ROWs will be applied for through the BLM.
- All construction activity will be confined to the approved ROW.
- All permanent pipelines will be buried (none are surface-laid).
- Temporary water lines will be surface laid for a period no longer than one year or time allotted by BLM Realty.
- Pipeline will run parallel to existing disturbances wherever possible and will stay within approved ROW.

CHEVRON U.S.A. Inc
Hayhurst Development Area (HDA)
Master Development Plan

- Power lines: 37.3 total miles of power lines will be required across the HDA. All powerlines will be overhead (none are buried). The average span between power poles will be 250 feet and a total of 788 poles will be required. All distribution lines will operate at 12.47 kV and are designed to APLIC standards.

Location and Types of Water Supply (Exhibit 5 - see Proposed Action Appendix F, Figure F.11)

- Four ponds, designed as permanent recycling containments per NMAC 19.15.34, will be required across the HDA:

Pond ID	Section	Township	Range	Unit Letter ¹	Capacity (MBBL)
1	10	26S	27E	A	770
2	8	26S	27E	P	770
3	18	25S	27E	A	770
4	26	25S	27E	P	770

1: Chevron submits this proposed action with the reasonable expectation that it will have the flexibility to relocate facilities within the NEPA "drill island" corridors without the necessity of revising the MDP.

- Water will be obtained from a variety of sources:

Source	Location	Quality	Transport Method
Local ground water	Within 15 miles of HDA	Fresh (0-5,000 TDS)	Pipeline or Truck
Capitan Reef	Near Jal, NM	Brackish (25-40,000 TDS)	Pipeline
Rustler Aquifer	Near Orla, TX	Brackish (25-40,000 TDS)	Pipeline
Recycled Produced	Within HDA	Saline (150-210,000 TDS)	Pipeline

- Local ground water will be sourced from the following vendors:

Vendor	Address
Gregory Rockhouse Ranch, Inc	1108 W Pierce St, Carlsbad NM 88220
MMX Excavating, Inc	2373 Pecos Hwy, Carlsbad NM 88220
Wolfcamp Water Partners	4800 Bryant Irvin Ct, Fort Worth TX 76107
XRI Blue	415 W Wall St #130, Midland TX 79701

- Water well locations are as follows:

Source	Vendor	Latitude	Longitude	Data Quality
Ground Water	Gregory Rockhouse Ranch, Inc	32° 12' 6.92" N	104° 15' 15.54" W	Exact
Ground Water	Gregory Rockhouse Ranch, Inc	32° 10' 17.39" N	104° 16' 35.76" W	Exact
Ground Water	Gregory Rockhouse Ranch, Inc	32° 12' 13.95" N	104° 14' 49.47" W	Exact
Ground Water	Gregory Rockhouse Ranch, Inc	32° 10' 52.89" N	104° 17' 38.43" W	Exact
Ground Water	MMX Excavating, Inc	TBD	TBD	TBD
Capitan Reef	Chevron U.S.A. Inc	31° 58' 23.81" N	103° 12' 52.12" W	Approx

- A temporary 10" expanding pipe surface transfer line will run along established disturbance corridors, such as along access roads or on top of flowline or pipeline rights-of-way.
 - Water line will run parallel to road and will stay within 10' of access road.
 - Temporary BLM ROWs will be applied for as needed for the water transfer lines.

Construction Material

- Caliche will be used to construct well pad and roads. Caliche will be purchased from the nearest federal, state, or private permitted pit
- Caliche will be used as surface material or fill for roads and pads, or to construct containment berms or low water crossings.
- The specific source of construction material will be specified in each APD's SUP
- The proposed source of construction material will be located and purchased by construction contractor.
 - Payment shall be made by contractor prior to any removal of federal minerals material by contacting agent at (575) 234-5972.
 - Notification shall be given to BLM at (575) 234-5909 at least 3 working days prior to commencing construction of access road and/or well pad.

Methods for Handling Waste

- Drilling fluids and produced oil and water from the well during drilling and completion operations will be stored safely and disposed of properly in an NMOCD approved disposal facility.

- Garbage and trash produced during drilling and completion operations will be collected in a trash container and disposed of properly at a state approved disposal facility. All trash on and around the well site will be collected for disposal.
- Human waste and grey water will be properly contained and disposed of properly at a state approved disposal facility.
- After drilling and completion operations, trash, chemicals, salts, frac sand and other waste material will be removed and disposed of properly at a state approved disposal facility.
- The well will be drilled utilizing a closed loop system (no reserve pits will be constructed). Drill cutting will be properly disposed of into steel tanks and taken to an NMOCD approved disposal facility.
- Chevron plans to utilize the following waste disposal sites:

Nearest City	Disposal Facility	Address	Phone Number
Carlsbad		6601 Hobbs Hwy, Carlsbad, NM	(575) 393-1079
Eunice	Sundance Services	5 miles east of Eunice on Hwy 18 and Wallach Ln	(575) 390-0342
Seminole, TX	Permian Disposal	587 US Hwy 385 S	(432) 955-0322

- Proposed Facilities: 5 proposed SWD facilities are located across the HDA:

ID	Township	Range	Section	Unit Letter ¹
1	26S	27E	2	M
2	25S	27E	16	F
3	25S	27E	26	P
4	26S	27E	12	L
5	26S	27E	2	P

¹ Chevron submits this proposed action with the reasonable expectation that it will have the flexibility relocate facilities within the NEPA "drill island" corridors without the necessity of revising the MDP.

Ancillary Facilities

- Three ancillary facilities are envisioned for the HDA – a water tank facility, an electrical substation, and a central housing facility. Detailed proposals for these facilities will be included in the APD submitted prior to their construction.

Well Site Layout (Exhibit 6)

- Rig Layout (Exhibit 6)
 - Exterior well pad dimensions are 475' x 330'
 - Interior well pad dimensions from point of entry (well head) of the westernmost well are N-150', S-80', E-255', W-220'. The length to the east includes 25' spacing for next well on multi-well pad (four wells). Total disturbance area needed for construction of well pad will be 3.60 acres
 - Topsoil placement is on the upslope edge of each pad (unless otherwise directed by BLM – final placement to be included in APD's SUP) no higher than 3 feet where interim reclamation is planned to be completed upon completion of well and evaluation of best management practices.
 - Construction methods: Pads would be constructed by clearing vegetation, salvaging and storing topsoil and leveling the drilling area using cut-and-fill techniques where appropriate.

Plans for Surface Reclamation

Reclamation Objectives

- The objective of interim reclamation is to restore vegetative cover and a portion of the landform sufficient to maintain healthy, biologically active topsoil; control erosion; and minimize habitat and forage loss, visual impact, and weed infestation, during the life of the well or facilities.
- The long-term objective of final reclamation is to return the land to a condition similar to what existed prior to disturbance. This includes restoration of the landform and natural vegetative community, hydrologic systems, visual resources, and wildlife habitats. To ensure that the long-term objective will be reached through human and natural processes, actions will be taken to ensure standards are met for site stability, visual quality, hydrological functioning, and vegetative productivity.
- The BLM will be notified at least 3 days prior to commencement of any reclamation procedures.
- If circumstances allow, interim reclamation and/or final reclamation actions will be completed no later than 6 months from when the final well on the location has been completed or plugged. We will gain written permission from the BLM if more time is needed.
- Reclamation will be performed by using the following procedures:

Interim Reclamation Procedures

- Within 6 months, Chevron will contact BLM Surface Management Specialists to devise the best strategies to reduce the size of the location.
- Within 30 days of well completion, the well location and surrounding areas will be cleared of, and maintained free of, all materials, trash, and equipment not required for production. A plan will be submitted showing where interim reclamation will be

completed in order to allow for safe operations, protection of the environment outside of drilled well, and following best management practices found in the BLM "Gold Book".

- In areas planned for interim reclamation, all the surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.
- The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.
- Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.
- Before commencing construction activities, proper erosion control methods will be determined for use on the area including and outside area of topsoil placement to control erosion, runoff and siltation of the surrounding area.
- The interim reclamation will be monitored periodically to ensure that vegetation has reestablished

Final Reclamation (well pad, buried pipelines, and power lines, etc.)

- Prior to final reclamation procedures, the well pad, road, and surrounding area will be cleared of material, trash, and equipment.
- All surfacing material will be removed and returned to the original mineral pit or recycled to repair or build roads and well pads.
- All disturbed areas, including roads, pipelines, pads, production facilities, and interim reclaimed areas will be recontoured to the contour existing prior to initial construction or a contour that blends in distinguishably with the surrounding landscape. Topsoil that was spread over the interim reclamation areas will be stockpiled prior to recontouring. The topsoil will be redistributed evenly over the entire disturbed site to ensure successful revegetation.
- After all the disturbed areas have been properly prepared; the areas will be seeded with the proper BLM seed mixture, free of noxious weeds.
- Proper erosion control methods will be used on the entire area to control erosion, runoff and siltation of the surrounding area.

Surface Ownership (Exhibit 7 - see Proposed Action Appendix 6)

- All surface is owned by BLM with the exception of the following:

Land Status	Township	Range	Section	Unit Letters
State Owned	25S	27E	16	All
Private	25S	27E	20	B, C, G, H, I, and J
State Owned	25S	27E	21	A, G, H, M, N, O, and P
Private	25S	27E	21	E and F
State Owned	25S	27E	26	C, F, I, J, and P
State Owned	26S	27E	2	All
Private	26S	27E	5	I, N, O, and P
State Owned	26S	27E	12	L

- BLM Surface – a number of surface tenants occupy the surface in the HDA:

Tenant Name	Allotment	Address
Forest A Connally	78094	126 S. Donaldson Farm Rd. Loving, NM 88256
Ogden Farm & Cattle Co.	78087	159 W. Ogden, Loving, NM 88256
Joy E. Cooksey	78101	P.O. Box 45, Carlsbad, NM 88221
Forehand Ranches, Inc.	78104	P.O. Box 5373, Carlsbad, NM 88221
Johnny Laxson	78102	224 W. Ogden, Loving, NM 88256
Martha Skeen	78142	P.O. Box 696, Loving, NM 88256
Owen Carleton	78107	P.O. Box 14, Malaga, NM 88263
Philip & Kendra Stell	78103	1305 Janway, Carlsbad NM 88220

- Nearest Post Office:** Malaga Post Office; 15.4 Miles north

Other Information

- Recycle Containment Pond Design Features:
 - Four permanent recycle containment ponds will be required across the HDA. The ponds will be centralized and used across multiple leases (see Exhibit 5).
 - Permanent buried pipelines will be installed to transport water between the four ponds (see Exhibit 4). Temporary surface pipelines will be installed between the ponds and the site of hydraulic fracturing operations.
 - All wells covered by the HDA MDP will require hydraulic fracturing
 - The ponds will be designed as “multiwell fluid management pits” in compliance with NMAC 19.15.34 and will include the following design features:
 - Berms
 - Berms shall be sloped at 3:1 both internally and externally
 - Berm top will have at least 12 feet of working area and be capable of supporting light vehicle traffic
 - Berm height, thickness, and depth will be determined based on site-specific information and included in each APD and SF-299.

- Liners
 - Ponds shall be double-lined and have a method of leak detection, typically trenched HDPE pipe between liners
 - An 8 oz geotextile fabric shall be used to line the soil prior to installation of a secondary (bottom) liner
 - Primary liner should be 60-mil smooth HDPE; secondary liner should be 40-mil smooth HDPE
 - Minimum 200-mil geonet shall be installed between primary and secondary liner to maintain an interstitial space
- Fencing
 - Ponds shall have eight-foot game fencing installed around the perimeter, outside of bottom berm.
 - The fence bottom shall be keyed-in around the perimeter of the pond site and include the use of two-foot silt fencing to prevent access of smaller animals.
- Wildlife Protection
 - Typical bird deterrent options include molded decoy owls and noise-making streamers.
 - Wildlife protection measures, including those for migratory birds, shall be monitored at least monthly to ensure deterrents are effective.

CHEVRON U.S.A. Inc
Hayhurst Development Area (HDA)
Master Development Plan

Chevron Representatives

Primary point of contact:

Jennifer Van Curen

Jennifer.VanCuren@arcadis-us.com

M- 432-270-8753

Chevron Functional Contacts

<p>Project Manager Name: Sean Cheben Address: 1400 Smith Street Houston, TX 77002 Phone: (713) 372-9392 Email: scnf@chevron.com</p>	<p>Drilling Engineer Name: Roderick Milligan Address: 1400 Smith Street Houston, TX 77002 Phone: (713) 372-2011 Email: RoderickMilligan@chevron.com</p>
<p>Surface Land Representative Name: Kevin Dickerson Address: 15 Smith Road Midland Texas 79705 Phone: (432) 687-7104 Email: Kevin.Dickerson@chevron.com</p>	<p>Facility Lead Name: Tyler Weaver Address: 1400 Smith Street Houston, TX 77002 Phone: (713) 372-9689 Email: Tyler.Weaver@chevron.com</p>
<p>Geologist Name: Jeff Fabre Address: 1400 Smith Street Houston, TX 77002 Phone: (713) 372-0523 Email: JeffreyFabre@chevron.com</p>	<p>Regulatory Specialist Cindy Herrera-Murillo Address: 1616 W. Bender Blvd, Hobbs, NM 88240 Office: (575) 263-0431 Email: CHerreraMurillo@chevron.com</p>

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

Injection well type:

Injection well number:

Injection well name:

Assigned injection well API number?

Injection well API number:

Injection well new surface disturbance (acres):

Minerals protection information:

Mineral protection attachment:

Underground Injection Control (UIC) Permit?

UIC Permit attachment:

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Surface discharge PWD discharge volume (bbl/day):

Surface Discharge NPDES Permit?

Surface Discharge NPDES Permit attachment:

Surface Discharge site facilities information:

Surface discharge site facilities map:

Section 6 - Other

Would you like to utilize Other PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Other PWD discharge volume (bbl/day):

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

07/27/2017

Bond Information

Federal/Indian APD: FED

BLM Bond number: CA0329

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: