

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD-ARTESIA

FORM APPROVED
OMB No 1004-0137
Expires July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

S

5. Lease Serial No
NMLC-028990B
6 If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE - Other instructions on page 2.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

DEC 07 2007

2 Name of Operator

Yates Petroleum Corporation

OCD-ARTESIA

3a Address

105 S. 4th Str., Artesia, NM 88210

3b Phone No (include area code)

575-748-1471

4 Location of Well (Footage, Sec., T., R., M., OR Survey Description)

330'FSL & 1980'FEL of Section 24-T18S-R30E (Unit O, SWSE)

7 If Unit or CA/Agreement, Name and/or No

8 Well Name and No.

Creek AL Federal #4

9 API Well No.

30-015-20247

10. Field and Pool or Exploratory Area

Shugart Yates 7Rivers Queen Grayburg

11. County or Parish, State

Eddy County, New Mexico

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other _____
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13 Describe Proposed or Completed Operation. Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomple horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. Rig up all safety equipment. No casing recovery will be attempted.
2. Set a CIBP at 3308'. Tag the CIBP. Spot a 30 sx Class "C" cement plug from 3108'-3308'.
3. Pull stretch in the casing to determine the top of free casing, if the base of the salt is above this point perforate 50' below the top of the base of the salt and squeeze with 75 sx cement, leaving a 100' plug inside the casing. If the casing is cemented above the top of the salt, place a 25 sx cement plug inside the casing across the top of the salt.
4. Perforate squeeze holes at 830'. Squeeze with 160 sx Class "C" cement with 2% CaCl₂ from near the surface to 830'. Displace the cement down to 670'. This will establish a cement plug across the surface casing shoe and a plug above the salt section.
5. Perforate the 5-1/2" casing with 4 holes at 150' with the deepest penetrating charges available to perforate all casing strings. Tie on to the production casing and establish circulation. Pump +/-60 sx of cement to circulate cement to the surface on all strings. Do not displace the cement. This will leave a plug from 150' to surface in the production casing and all annular spaces.
6. Remove all surface equipment and weld dry hole marker per regulations.

NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

14 I hereby certify that the foregoing is true and correct
Name (Printed/Typed)

Tina Huerta

Title **Regulatory Compliance Supervisor**

Signature

Tina Huerta

Date

November 16, 2007

DEC 4 2007

**LES BABYAK
PETROLEUM ENGINEER**

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Title

Date

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

**Accepted for record
NMOCD**

APPROVED

WELL NAME: Creek AL #4 FIELD: Shugart
 LOCATION: 330' FSL & 1980' FEL of Section 24-18S-30E Eddy Co., NM
 GL: 3,617' ZERO: _____ KB: _____
 SPUD DATE: 8/29/69 COMPLETION DATE: 10/19/69
 COMMENTS: API No.: 30-015-20247

CASING PROGRAM

8-5/8" 24# J-55	780'
5.5# 14# J-55	3,476'

10" Hole

Before

8-5/8" @ 780' w/ 100 sx cmt
 (No record of cement
 Circulating or TOC)

TOPS

Top of Salt 720'
 Base of Salt 1,774'
 Yates 1,989'
 Queen 3,123'
 Penrose 3,356'

8" Hole

Queen Perfs: 3,358-3,384' (20)

5 1/2" @ 3,476 w/ 150 sx
 (No record of cement circulating
 or TOC)

TD. 3,789


**Accepted for record
 NMOCD**

Not to Scale
 10/23/07
 DC/Hill

WELL NAME: Creek AL #4 FIELD: Shugart
 LOCATION: 330' FSL & 1980' FEL of Section 24-18S-30E Eddy Co., NM
 GL: 3,617' ZERO: _____ KB: _____
 SPUD DATE: 8/29/69 COMPLETION DATE: 10/19/69
 COMMENTS: API No.: 30-015-20247

CASING PROGRAM

8-5/8" 24# J-55	780'
5.5# 14# J-55	3,476'

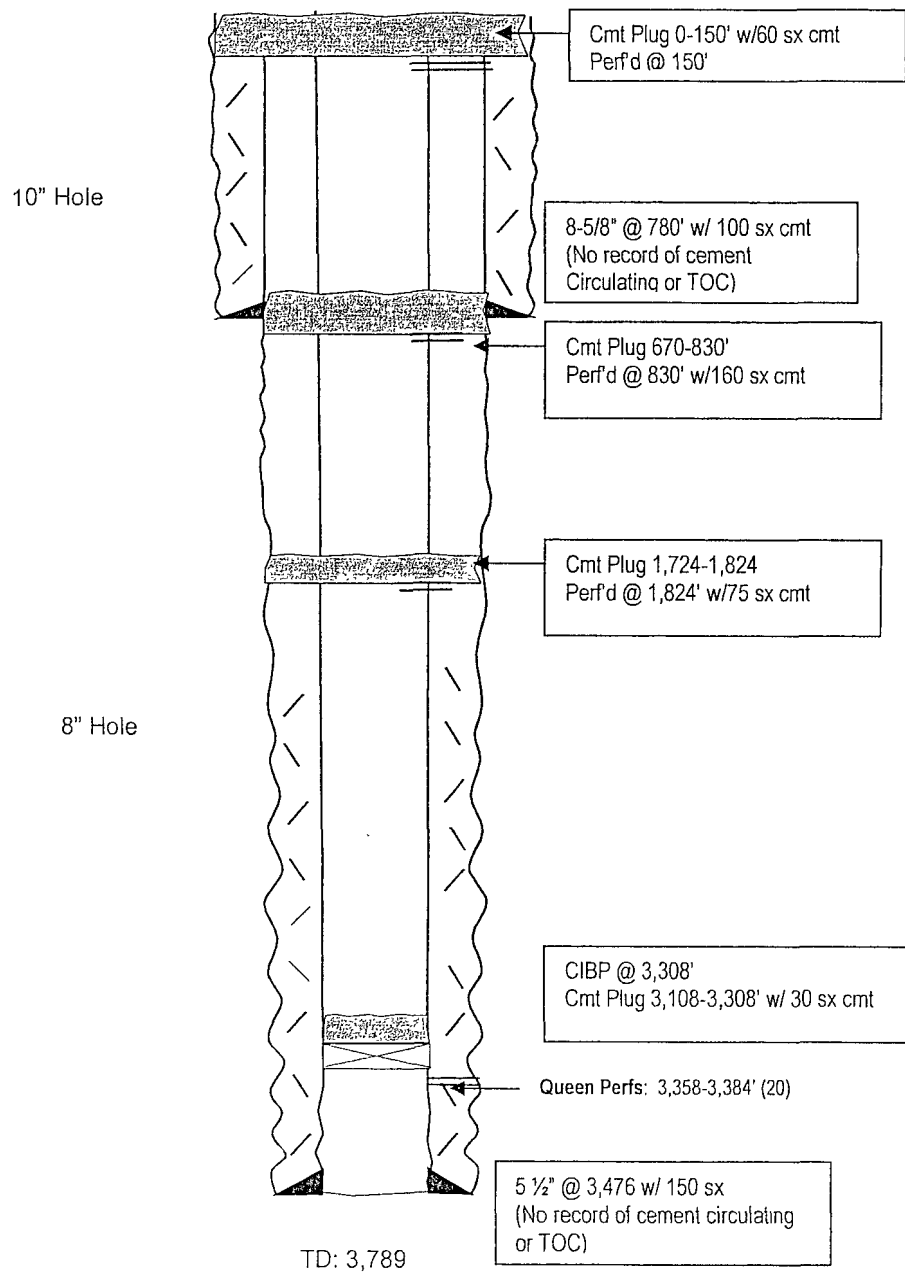

After

TOPS	
Top of Salt	720'
Base of Salt	1,774'
Yates	1,989'
Queen	3,123'
Penrose	3,356'

**Accepted for record
NMOCD**

Not to Scale
10/23/07
DC/Hill