

ATS-08-109

Form 3160-3
(April 2004)JUN 12 2008
OCD-ARTESIA

IAE - CPO

JUN 12 2008
OCD-ARTESIA
SUNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No 1004-0137
Expires March 31, 2007

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work. <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. SHL NM-15007 BEL NM-119268	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Cimarex Energy Co. of Colorado		7. If Unit or CA Agreement, Name and No Pending	
3a. Address PO Box 140907 Irving, TX 75014		8. Lease Name and Well No. Glycerin 10 Federal Com No. 2	
3b. Phone No (include area code) 972-401-3111		9. API Well No 30-015- 36409	
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At Surface 2180' FNL & 330' FEL At proposed prod. Zone 1980' FNL & 330' FWL <i>Horizontal Abo test</i>		10. Field and Pool, or Exploratory Abo Wildcat	
14. Distance in miles and direction from nearest town or post office*		11. Sec., T. R. M. or Blk and Survey or Area 10-16S-29E	
15. Distance from proposed* location to nearest property or lease line, ft (Also to nearest drig. unit line if any) 330'		12. County or Parish Eddy	
16. No of acres in lease 440		13. State NM	
17. Spacing Unit dedicated to this well S2N2 160			
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft N/A		20. BLM/BIA Bond No on File NM-2575	
19. Proposed Depth Pilot Hole 7,500' MD 11,146' TVD 7,140'			
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3,719' GR		22. Approximate date work will start* 05.01.08	
		23. Estimated duration 25-30 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|--|--|
| 1. Well plat certified by a registered surveyor | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator Certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature Zeno Farris	Name (Printed/Typed) Zeno Farris	Date 04.04.08
Title Manager Operations Administration		
Approved By (Signature) /s/ Don Peterson	Name (Printed/Typed) /s/ Don Peterson	Date JUN 11 2008
Title FIELD MANAGER	Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.S. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

* (Instructions on page 2)

APPROVAL FOR TWO YEARS**GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS
ATTACHED****ROSWELL CONTROLLED WATER BASIN****SEE ATTACHED FOR
CONDITIONS OF APPROVAL****Witness Surface Casing**

DISTRICT I

1625 N. French Dr., Hobbs, NM 88240

DISTRICT II

1301 W. Grand Avenue, Artesia, NM 88210

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102

Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

X AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-015-36409	Pool Code 97019	Pool Name Wildcat	Abo Wildcat
Property Code 37195	Property Name GLYCERIN "10" FEDERAL COM		Well Number 2
OGRID No. 162683	Operator Name CIMAREX ENERGY CO. OF COLORADO		Elevation 3719'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	10	16 S	29 E		2180	NORTH	330	EAST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	10	16 S	29 E		1980	NORTH	330	WEST	EDDY
Dedicated Acres 160	Joint or Infill	Consolidation Code P	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

		OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <u>Zeno Farris</u> 04-04-08 Signature Date Zeno Farris Printed Name	
BOTTOM HOLE LOCATION Lat - N32°56'16.9" Long - W104°04'12.6" NMSPCE- N 705092.218 E 622675.908 (NAD-83)		SURFACE LOCATION Lat - N32°56'14.90" Long - W104°03'18.60" NMSPCE- N 704899.9 E 626677.0 (NAD-83)	
NOVEMBER 2, 2007 Date Surveyed Signature & Seal of Professional Surveyor 		Certificate No. Gary L. Jones 7977 BASIN SURVEYS	

SECTION 10, TOWNSHIP 16 SOUTH, RANGE 29 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

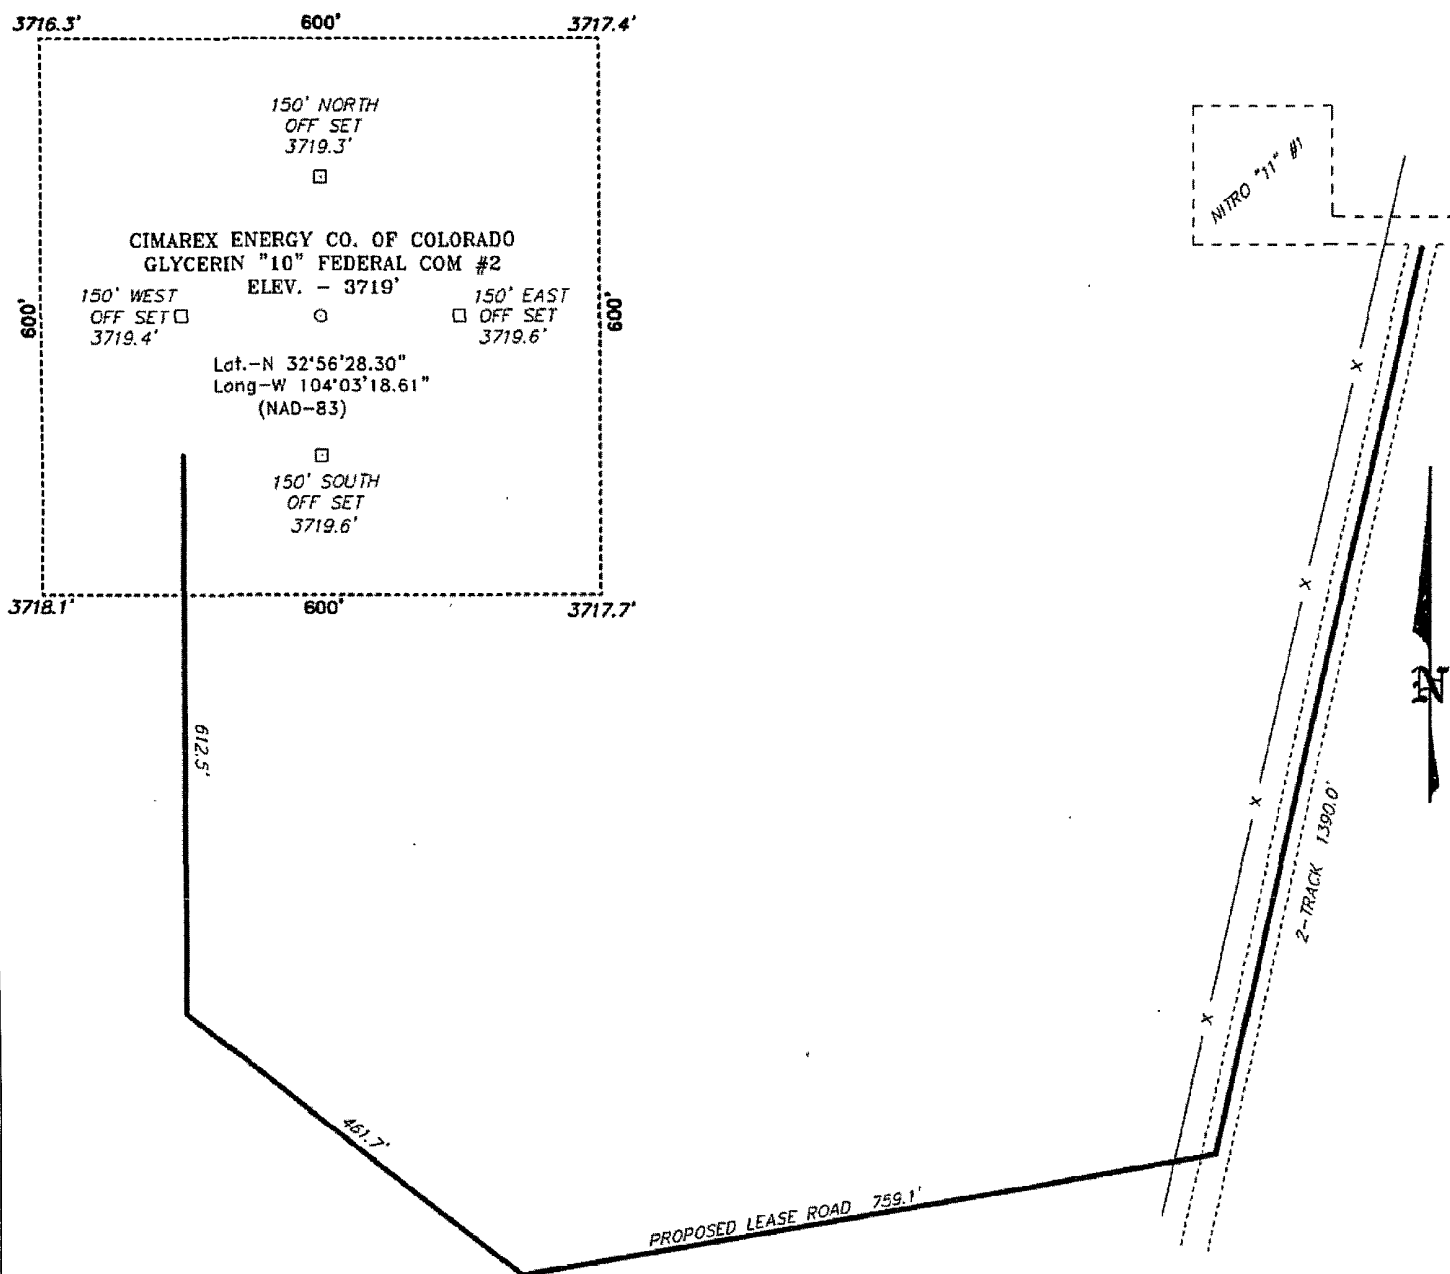

Directions to Location:

FROM JUNCTION OF US HWY 82 AND BARNIVAL DRAW ROAD, GO NORTH ON BARNIVAL DRAW FOR 6.8 MILES TO LEASE ROAD, ON LEASE ROAD CONTINUE NORTHWESTERLY 3.5 MILES TO GATE, GO SOUTHEAST 0.7 MILES THENCE SOUTHWEST 0.7 MILES TO LEASE ROAD, GO WEST 0.2 MILES TO PROPOSED LEASE ROAD.

BASIN SURVEYS P.O. BOX 1786 -HOBBS, NEW MEXICO

W.O. Number: 18718 Drawn By: J. SMALL


Date: 11-07-2007 Disk: JMS 18718W



CIMAREX ENERGY CO. OF COLORADO

REF: GLYCERIN "10" FEDERAL COM #2 / WELL PAD TOPO

THE GLYCERIN "10" FEDERAL COM #2 LOCATED 2180' FROM
THE NORTH LINE AND 330' FROM THE EAST LINE OF
SECTION 10, TOWNSHIP 16 SOUTH, RANGE 29 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

Survey Date: 11-02-2007 Sheet 1 of 1 Sheets

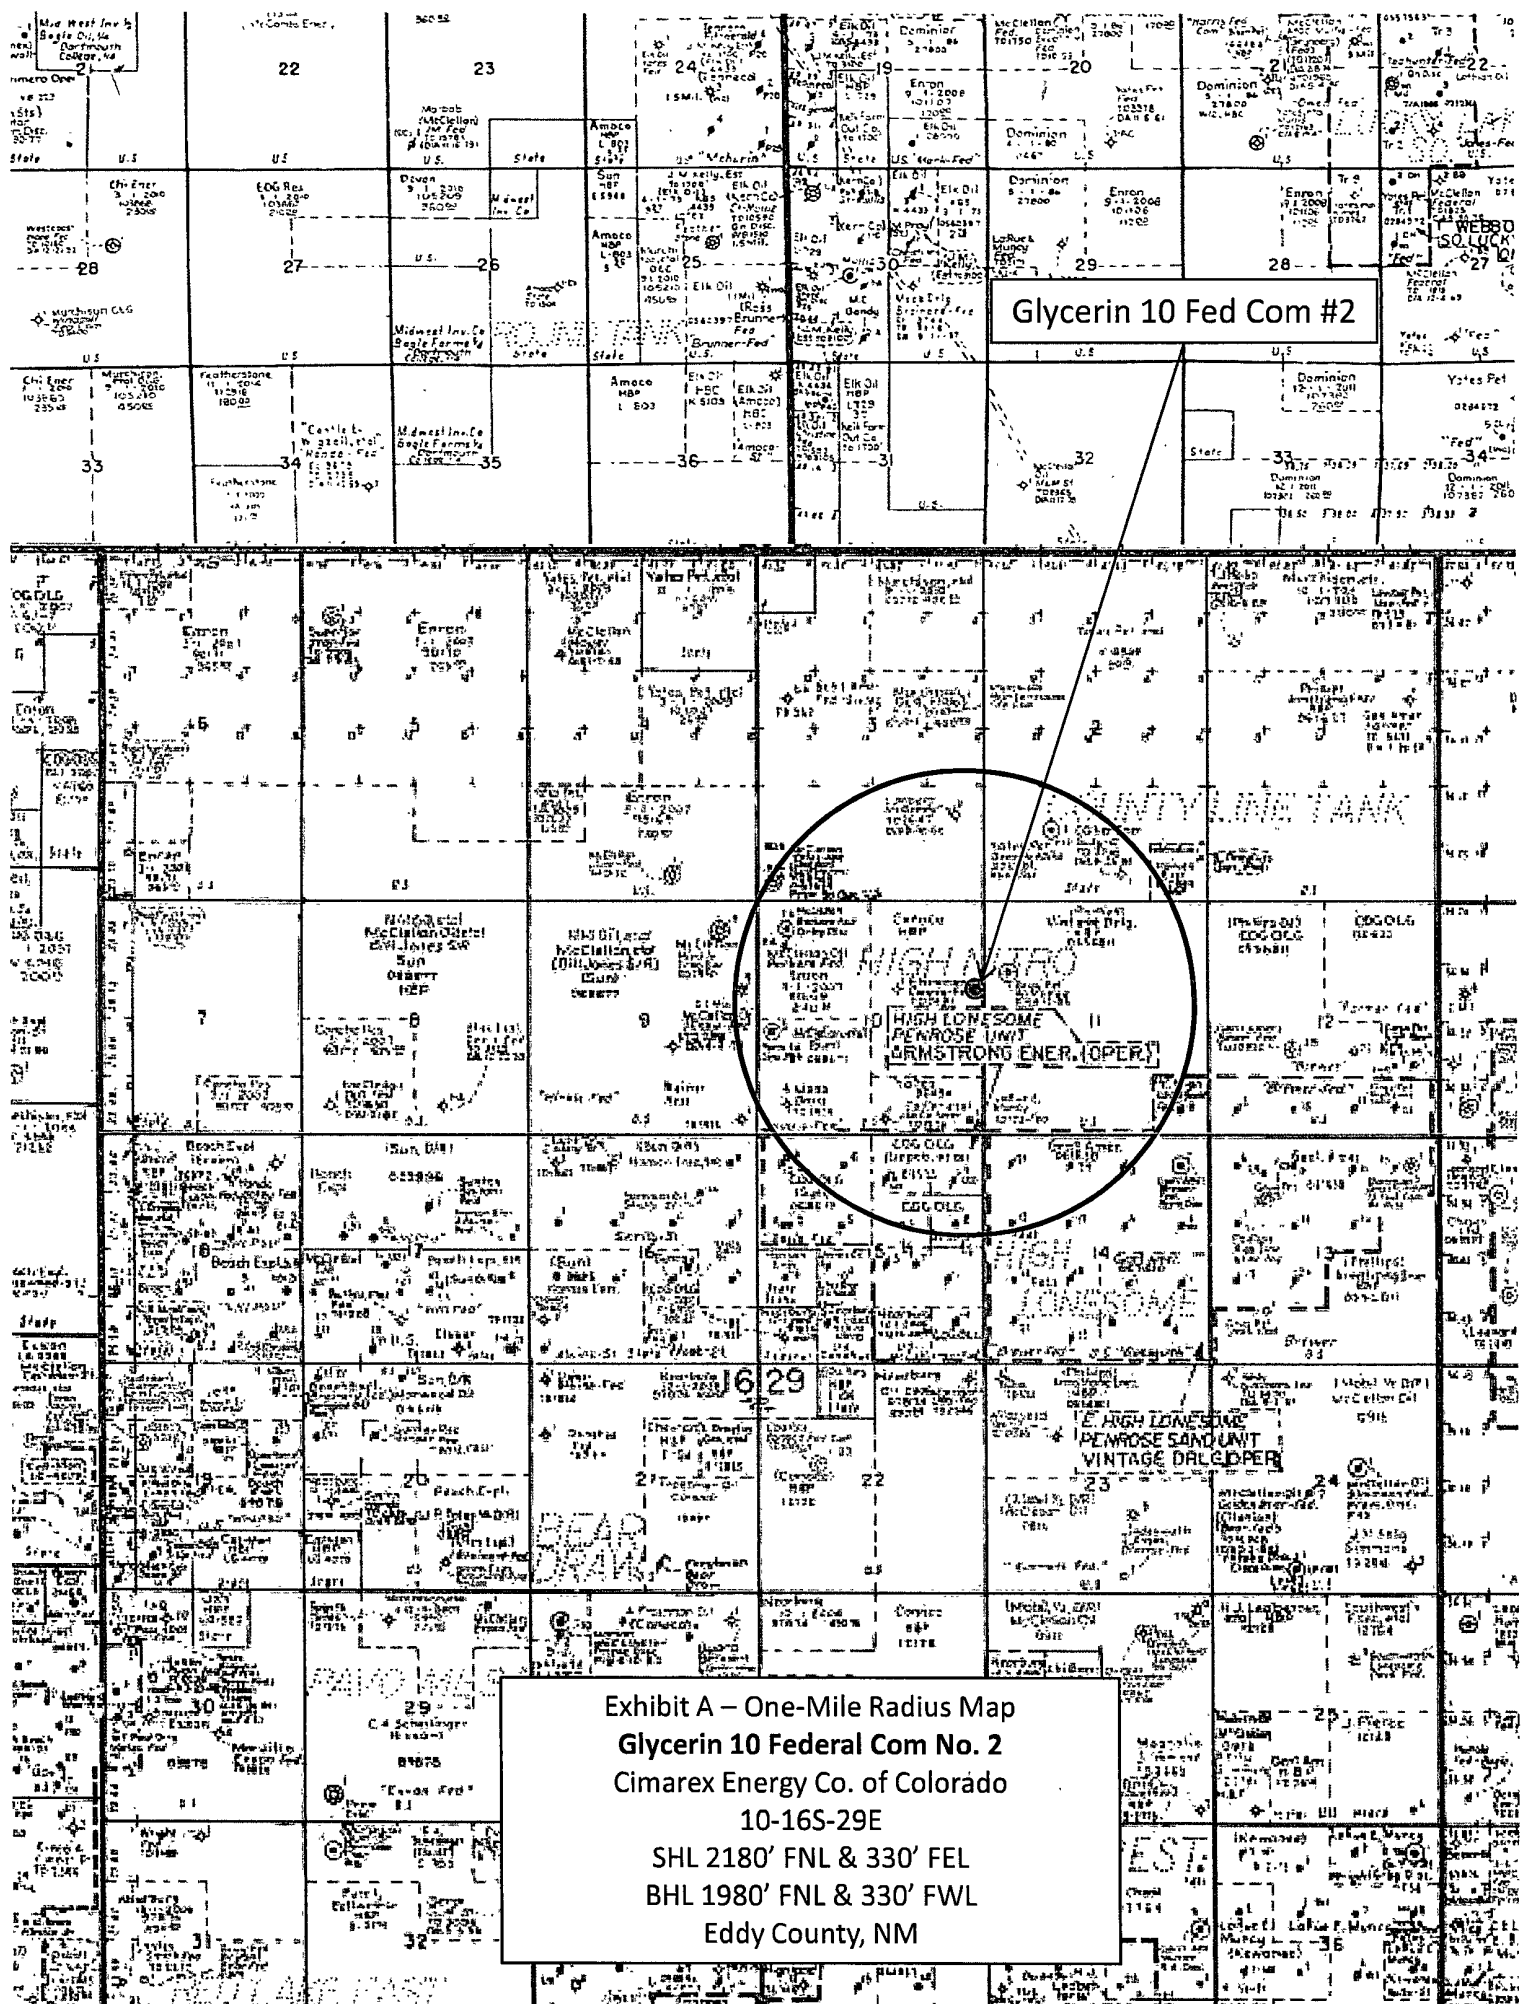

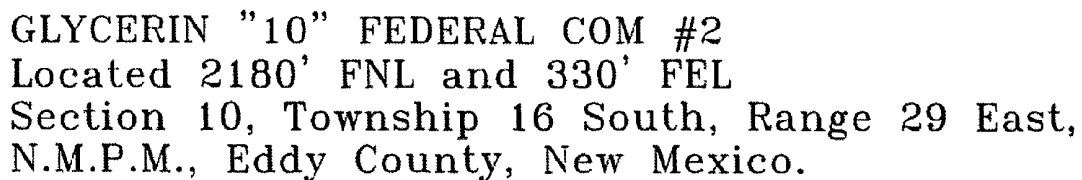

Date: 11-07-2007

CIMAREX
ENERGY CO.
OF COLORADO

Exhibit B

Application to Drill
Glycerin 10 Federal Com No. 2
 Cimarex Energy Co. of Colorado
 Unit H, Section 10
 T16S-R29E, Eddy County, NM

In response to questions asked under Section II B of Bulletin NTL-6, the following information is provided for your consideration:

- 1 Location: SHL 2180' FNL & 330' FEL
 BHL 1980' FNL & 330' FWL
- 2 Elevation above sea level: 3,719 GR
- 3 Geologic name of surface formation: Quaternary Alluvium Deposits
- 4 Drilling tools and associated equipment: Conventional rotary drilling rig using fluid as a circulating medium for solids removal.
- 5 Proposed drilling depth: Pilot Hole 7,500' MD 11,146' TVD 7,140'
- 6 Estimated tops of geological markers:
 Abo Shale 6,195'
 Lower Abo Dolomite 7,220'
 Wolfcamp 7,320'
- 7 Possible mineral bearing formation:
 Abo Oil

8 Proposed Mud Circulating System:

SEE CONS

Depth	Mud Wt	Visc	Fluid Loss	Type Mud
0' to 340' ^{400'}	8.4 - 8.6	28	NC	FW
340' ^{400'} to 2,700'	10.0	30-32	NC	Brine water
2,700' to 7,500'	8.4 - 9.5	30-32	NC	FW, brine
6,923' to 7,423'	9.0	28-32	May lose circ	Cut brine
7,424' to 11,146'	9.0	28-32	May lose circ	Cut brine

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

Proposed drilling Plan

Drill 8 3/4" hole to 7,500' (pilot hole) and cement (see page 2 - Application to Drill). Set whipstock plug @ 7,040.' Mill window from 7,025' to 7,035.' Kick off 6 1/8" lateral @ 7,030.' Drill 6 1/8" hole to MD 11,146' and TVD 7,140.' Install 4 1/2" **Peak Completion Assembly**. Use BTC from RSB Packer @ 6,923' to 7,423.' Use LTC from 7,424' to 11,146.' Liner length 4,223.' Length of lateral drill hole 4,116.'

Application to Drill
Glycerin 10 Federal Com No. 2
 Cimarex Energy Co. of Colorado
 Unit H, Section 10
 T16S-R29E, Eddy County, NM

9 Casing & Cementing Program:

SEE
COAS

String	Hole Size	Depth 400'		Casing OD	Weight	Thread	Collar	Grade
Surface	17½"	0'	to 340'	New 13½"	48#	8-R	STC	H-40
Intermediate	12¼"	0'	to 2,700'	New 9½"	40#	8-R	LTC	J-55
Pilot Hole	8¾"	0'	to 7,500'	New 7"	26#	8-R	LTC	P-110
Lateral	6⅝"	6,923'	to 7,423'	New 4½"	11.6#	8-R	BTC	P-110
Lateral	6⅝"	7,424'	to 11,146'	New 4½"	11.6#	8-R	LTC	P-110

10 Cementing:

Surface

Lead: 110 sx Premium Plus + 1% CaCl₂ + 0.125# Poly-e-flake (wt 12.5, yld 1.97)

Tail: 220 sx Premium Plus + 2% CaCl₂ (wt 14.8, yld 1.35)

TOC Surface

Intermediate

Lead: 415 sks Interfill C + 0.125# Poly-E-Flake (wt 11.9, yld 2.45)

Tail: 215 sks Premium Plus + 1% CaCl₂ (wt 14.8, yld 1.34)

TOC Surface

Pilot Hole

Lead: 270 sx Interfill H + 0.1% HR-7 + 0.125# Poly-e-flake (wt 11.9, yld 2.49)

Tail: 170 sx Super H + 0.5% Halad-344 + 0.4% CFR-3 + 1# Salt + 5# Gilsonite + 0.125# Poly-e-flake + 0.35% HR-7 (wt 13.2, yld 1.61)

TOC 2300'

Lateral

No cement needed. Peak completion assembly.

Fresh water zones will be protected by setting 13½" casing at 340' and cementing to surface. Hydrocarbon zones will be protected by setting 9½" casing at 2700' and cementing to surface, and by setting 7" casing at 7500' and cementing to 2300.'

<u>Collapse Factor</u>	<u>Burst Factor</u>	<u>Tension Factor</u>
1.125	1.125	1.6

11 Pressure control Equipment:

Exhibit "E". A 11" 5000 PSI working pressure B.O.P. consisting of one set of blind rams and one set of pipe rams and a 5000# annular type preventer. A choke manifold and 120 gallon accumulator with floor and remote operating stations and auxiliary power system. Rotating head below 6000.' A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

BOP unit will be hydraulically operated. BOP will be nipped up and operated at least once a day while drilling and the blind rams will be operated when out of hole during trips. No abnormal pressure or temperature is expected while drilling. From the base of the surface pipe through the running of production casing, the well will be equipped with a 5000 psi BOP system.

We are requesting a variance for testing the 13½" surface casing from Onshore Order No. 2, which states that all casing strings below the conductor shall be pressure tested to 0.22 psi per foot or 1500 psi, whichever is greater, but not to exceed 70% of the manufacturer's stated maximum internal yield. We are requesting to test the 13½" casing to 1000 psi using rig pumps. The BOP will be tested to 3000 psi by an independent service company.

Application to Drill
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

12 Testing, Logging and Coring Program:

- A. Mud logging 2 man unit from 6000' to TD
- B. Electric logging program: CNL / LDT / CAL / GR, DLL / CAL / GR
- C. No DSTs or cores are planned at this time.

13 Potential Hazards:

No abnormal pressures or temperatures are expected. In accordance with Onshore Order 6, Cimarex does not anticipate that there will be enough H₂S from the surface to the Abo formations to meet the BLM's minimum requirements for the submission of an "H₂S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since we have an H₂S Safety package on all wells, attached is an "H₂S Drilling Operations Plan." Adequate flare lines will be installed off the mud / gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

Estimated BHP **2300 psi** Estimated BHT **110°**

- 14 Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved.

Drilling expected to take 10-15 days

If production casing is run an additional 30 days will be required to complete and construct surface facilities.

15 Other Facets of Operations:

After running casing, cased hole gamma ray neutron collar logs will be run from total depth over possible pay intervals.

Abo pay will be perforated and stimulated.

The proposed well will be tested and potentialized as **an oil well.**




DRILLING PROGNOSIS Cimarex Energy Company

4/4/2008

Well: Glycerin 10 Fed Com #2
Location: 10-16S-29E
County, State: Eddy County, NM
Surface Location: 2180 FN, 330' FE
Bottomhole Loc: 1980 FN, 330' FW
E-Mail:
Wellhead:

Lse Serial #:
Field:
Objective:
TVD/MD: 7190 / 11800
Cementing: Halliburton
Mud:
Motors:
OH Logs: Halliburton
Rlg: Key 880
Offset Wells:

Xmas Tree
Tubing: 2 7/8" L80 EUE
Superintendent: Dee Smith
Engineer: Mark Audas

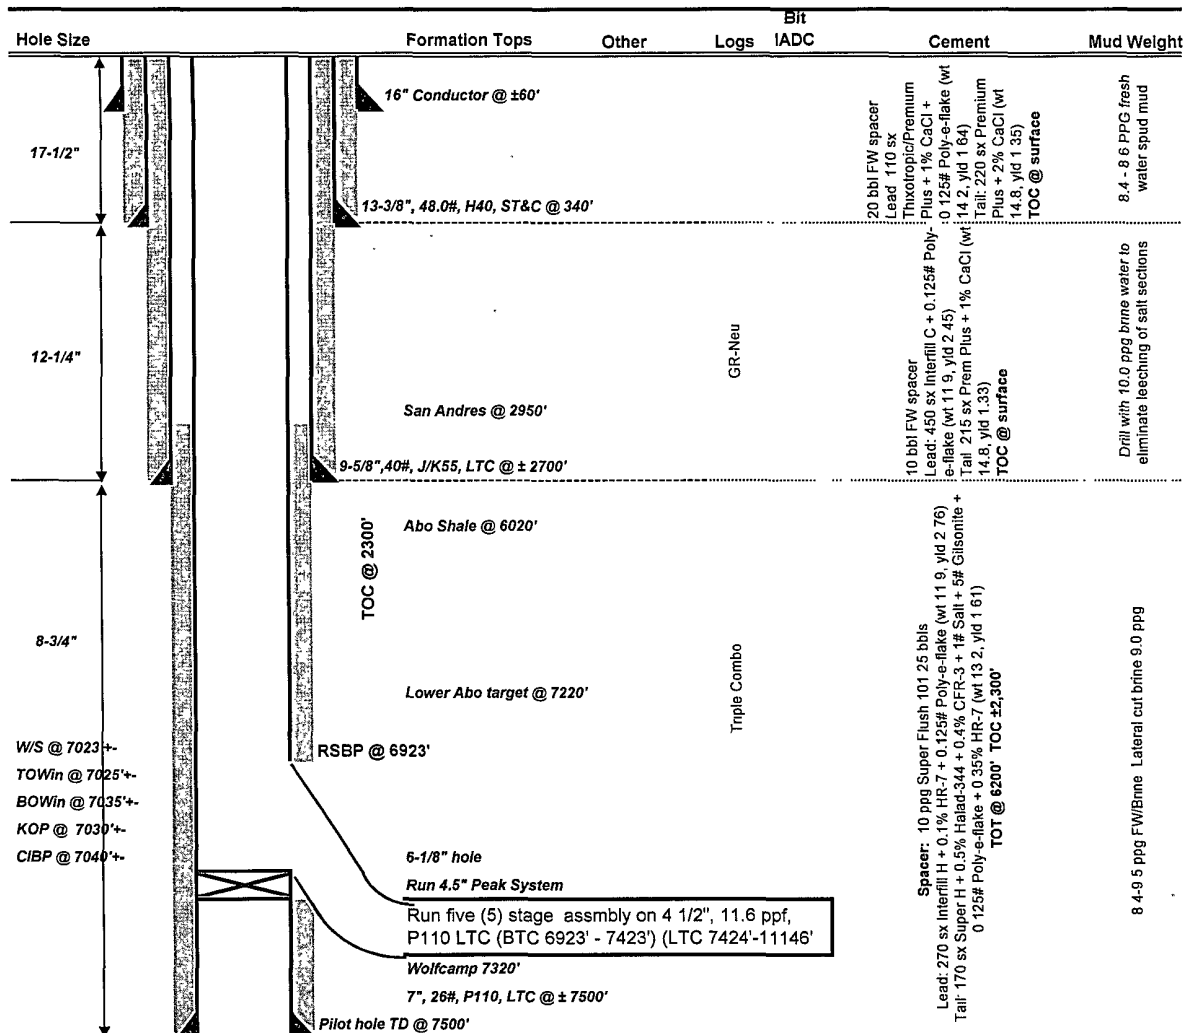

NOTES:

Install wellhead on 13-3/8" and NU BOP. Test this installation to 1000 psi w/ rig pump. Then after setting 9-5/8" in slips and installing the csg spool, NU BOP (5M) w/ rotating head and test BOP to 5M w/ test unit. Test casing.
Cement volumes for surface csg include a 100% excess in the open hole section. If drilling conditions deem necessary, fluid caliper hole and adjust volumes.
Cement volumes for intermediate csg include a 70% excess in the open hole section. If drilling conditions deem necessary, fluid caliper hole and adjust volumes.
Cement volumes for production csg include a 25% excess in the open hole section. Adjust volumes after caliper + 25% excess

ALL INVOICES ARE TO SHOW **CIMAREX ENERGY** AS OPERATOR AND USE CIMAREX ACCOUNTING CODES.



Planned Wellpath Report

Preliminary
Page 1 of 3



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Cimarex Energy Co.	Slot	No. 2 SHL
Area	Eddy County, NM	Well	No. 2
Field	(Glycerin) Sec. 10, T16S, R29E	Wellbore	No. 2 PWB
Facility	Glycerin 10 Fed Com No. 2		

REPORT SETUP INFORMATION			
Projection System	NAD83 / TM New Mexico State Planes, Eastern Zone (3001), US feet	Software System	WellArchitect® 2.0
North Reference	Grid	User	Victor Hernandez
Scale	0.999917	Report Generated	3/31/2008 at 7:40:47 AM
Convergence at slot	0.15° East	Database/Source file	WA_Midland/No. 2_PWB.xml

WELLPATH LOCATION						
	Local coordinates		Grid coordinates		Geographic coordinates	
	North[ft]	East[ft]	Easting[USft]	Northing[USft]	Latitude	Longitude
Slot Location	0.00	0.00	626677.00	704899.90	32°56'14.899"N	104°03'18.601"W
Facility Reference Pt			626677.00	704899.90	32°56'14.899"N	104°03'18.601"W
Field Reference Pt			626677.00	704899.90	32°56'14.899"N	104°03'18.601"W

WELLPATH DATUM			
Calculation method	Minimum curvature	Rig on No. 2 SHL (RT) to Facility Vertical Datum	18.00ft
Horizontal Reference Pt	Facility Center	Rig on No. 2 SHL (RT) to Mean Sea Level	3737.00ft
Vertical Reference Pt	Rig on No. 2 SHL (RT)	Facility Vertical Datum to Mud Line (Facility)	0.00ft
MD Reference Pt	Rig on No. 2 SHL (RT)	Section Origin	N 0.00, E 0.00 ft
Field Vertical Reference	Mean Sea Level	Section Azimuth	272.75°

BAKER
HUGHES
INTEQ



Planned Wellpath Report

Preliminary
Page 2 of 3



INTEQ

REFERENCE WELLPATH IDENTIFICATION			
Operator	Cimarex Energy Co.	Slot	No. 2 SHL
Area	Eddy County, NM	Well	No. 2
Field	(Glycerin) Sec. 10, T16S, R29E	Wellbore	No. 2 PWB
Facility	Glycerin 10 Fed Com No. 2		

WELLPATH DATA (48 stations) † = interpolated/extrapolated station

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
0.00	0.000	272.752	0.00	0.00	0.00	0.00	0.00	Tie On
6195.00†	0.000	272.752	6195.00	0.00	0.00	0.00	0.00	ABO SHALE
7030.00	0.000	272.752	7030.00	0.00	0.00	0.00	0.00	KOP
7130.00†	30.000	272.752	7125.49	25.59	1.23	-25.56	30.00	
7230.00†	60.000	272.752	7195.40	95.49	4.58	-95.38	30.00	
7310.59†	84.176	272.752	7220.00	171.60	8.24	-171.41	30.00	LOWER ABO DOLOMITE
7330.00†	90.000	272.752	7220.99	190.99	9.17	-190.77	30.00	
7334.06	91.217	272.752	7220.94	195.04	9.36	-194.82	30.00	EOC
7430.00†	91.217	272.752	7218.91	290.96	13.97	-290.63	0.00	
7530.00†	91.217	272.752	7216.78	390.94	18.77	-390.49	0.00	
7630.00†	91.217	272.752	7214.66	490.92	23.57	-490.35	0.00	
7730.00†	91.217	272.752	7212.54	590.90	28.37	-590.21	0.00	
7830.00†	91.217	272.752	7210.41	690.87	33.17	-690.08	0.00	
7930.00†	91.217	272.752	7208.29	790.85	37.97	-789.94	0.00	
8030.00†	91.217	272.752	7206.16	890.83	42.77	-889.80	0.00	
8130.00†	91.217	272.752	7204.04	990.81	47.57	-989.66	0.00	
8230.00†	91.217	272.752	7201.92	1090.78	52.37	-1089.53	0.00	
8330.00†	91.217	272.752	7199.79	1190.76	57.17	-1189.39	0.00	
8430.00†	91.217	272.752	7197.67	1290.74	61.97	-1289.25	0.00	
8530.00†	91.217	272.752	7195.55	1390.72	66.77	-1389.11	0.00	
8630.00†	91.217	272.752	7193.42	1490.69	71.57	-1488.97	0.00	
8730.00†	91.217	272.752	7191.30	1590.67	76.37	-1588.84	0.00	
8830.00†	91.217	272.752	7189.18	1690.65	81.17	-1688.70	0.00	
8930.00†	91.217	272.752	7187.05	1790.63	85.97	-1788.56	0.00	
9030.00†	91.217	272.752	7184.93	1890.60	90.77	-1888.42	0.00	
9130.00†	91.217	272.752	7182.81	1990.58	95.57	-1988.29	0.00	
9230.00†	91.217	272.752	7180.68	2090.56	100.37	-2088.15	0.00	
9330.00†	91.217	272.752	7178.56	2190.54	105.17	-2188.01	0.00	
9430.00†	91.217	272.752	7176.44	2290.51	109.97	-2287.87	0.00	
9530.00†	91.217	272.752	7174.31	2390.49	114.77	-2387.73	0.00	
9630.00†	91.217	272.752	7172.19	2490.47	119.57	-2487.60	0.00	
9730.00†	91.217	272.752	7170.07	2590.45	124.37	-2587.46	0.00	
9830.00†	91.217	272.752	7167.94	2690.42	129.17	-2687.32	0.00	
9930.00†	91.217	272.752	7165.82	2790.40	133.97	-2787.18	0.00	
10030.00†	91.217	272.752	7163.70	2890.38	138.77	-2887.04	0.00	
10130.00†	91.217	272.752	7161.57	2990.36	143.57	-2986.91	0.00	
10230.00†	91.217	272.752	7159.45	3090.33	148.37	-3086.77	0.00	
10330.00†	91.217	272.752	7157.33	3190.31	153.17	-3186.63	0.00	
10430.00†	91.217	272.752	7155.20	3290.29	157.97	-3286.49	0.00	
10530.00†	91.217	272.752	7153.08	3390.27	162.77	-3386.36	0.00	
10630.00†	91.217	272.752	7150.96	3490.24	167.57	-3486.22	0.00	
10730.00†	91.217	272.752	7148.83	3590.22	172.37	-3586.08	0.00	
10830.00†	91.217	272.752	7146.71	3690.20	177.17	-3685.94	0.00	
10930.00†	91.217	272.752	7144.59	3790.17	181.97	-3785.80	0.00	
11030.00†	91.217	272.752	7142.46	3890.15	186.77	-3885.67	0.00	

INTEQ



Planned Wellpath Report

Preliminary
Page 3 of 3



INTEQ

REFERENCE WELLPATH IDENTIFICATION

Operator	Cimarex Energy Co.	Slot	No. 2 SHL
Area	Eddy County, NM	Well	No. 2
Field	(Glycerin) Sec. 10, T16S, R29E	Wellbore	No. 2 PWB
Facility	Glycerin 10 Fed Com No. 2		

WELLPATH DATA (48 stations) † = interpolated/extrapolated station

MD [ft]	Inclination [°]	Azimuth [°]	TVD [ft]	Vert Sect [ft]	North [ft]	East [ft]	DLS [°/100ft]	Comments
11101.52†	91.217	272.752	7140.94	3961.66	190.20	-3957.09	0.00	LOWER ABO DOLOMITE
11130.00†	91.217	272.752	7140.34	3990.13	191.57	-3985.53	0.00	
11145.92	91.217	272.752	7140.00†	4006.05	192.33	-4001.43	0.00	No. 2H BHL

TARGETS

Name	MD [ft]	TVD [ft]	North [ft]	East [ft]	Grid East [srv ft]	Grid North [srv ft]	Latitude	Longitude	Shape
1) No. 2 BHL	11145.92	7140.00	192.33	-4001.43	622675.91	705092.22	32°56'16.904"N	104°04'05.545"W	point

SURVEY PROGRAM Ref Wellbore: No. 2H PWB Ref Wellpath: Preliminary

Start MD [ft]	End MD [ft]	Positional Uncertainty Model	Log Name/Comment	Wellbore
18.00	11145.92	NaviTrak (Standard)		No. 2 PWB

BAKER
HUGHES

INTEQ



Cimarex Energy Co.

Location: Eddy County, NM
Field: (Glycerin) Sec. 10, T16S, R29E
Facility: Glycerin 10 Fed Com No. 2

Slot: No. 2 SHL
Well: No. 2
Wellbore: No. 2 PWB

Plot reference wellpath is Preliminary

True vertical depths are referenced to Rig on No. 2H SHL (RT)

Measured depths are referenced to Rig on No. 2H SHL (RT)

Rig on No. 2H SHL (RT) to Mean Sea Level: 3737 feet

Mean Sea Level to Mud line (Facility: Glycerin 10 Fed Com No. 2H): -3719 feet

Distances are in feet referenced to Facility Center

Grid System: NAD83 / T11 New Mexico State Planes, Eastern Zone (3011) US feet

North Reference: Grid north

Scale: True distance

Depths are in feet



Created by: Victor Hernandez on 3/31/2008



INTEQ

Well Profile Data

Design Comment	MD (ft)	Inc (°)	Az (°)	TVD (ft)	Local N (ft)	Local E (ft)	DLS (°/100ft)	VS (ft)
Tie On	0.00	0.000	272.752	0.00	0.00	0.00	0.00	0.00
KOP	7030.00	0.000	272.752	7030.00	0.00	0.00	0.00	0.00
EOC	7334.06	91.217	272.752	7220.94	9.36	-194.82	30.00	195.04
No. 2 BHL	11145.92	91.217	272.752	7140.00	192.33	-4001.43	0.00	4006.05

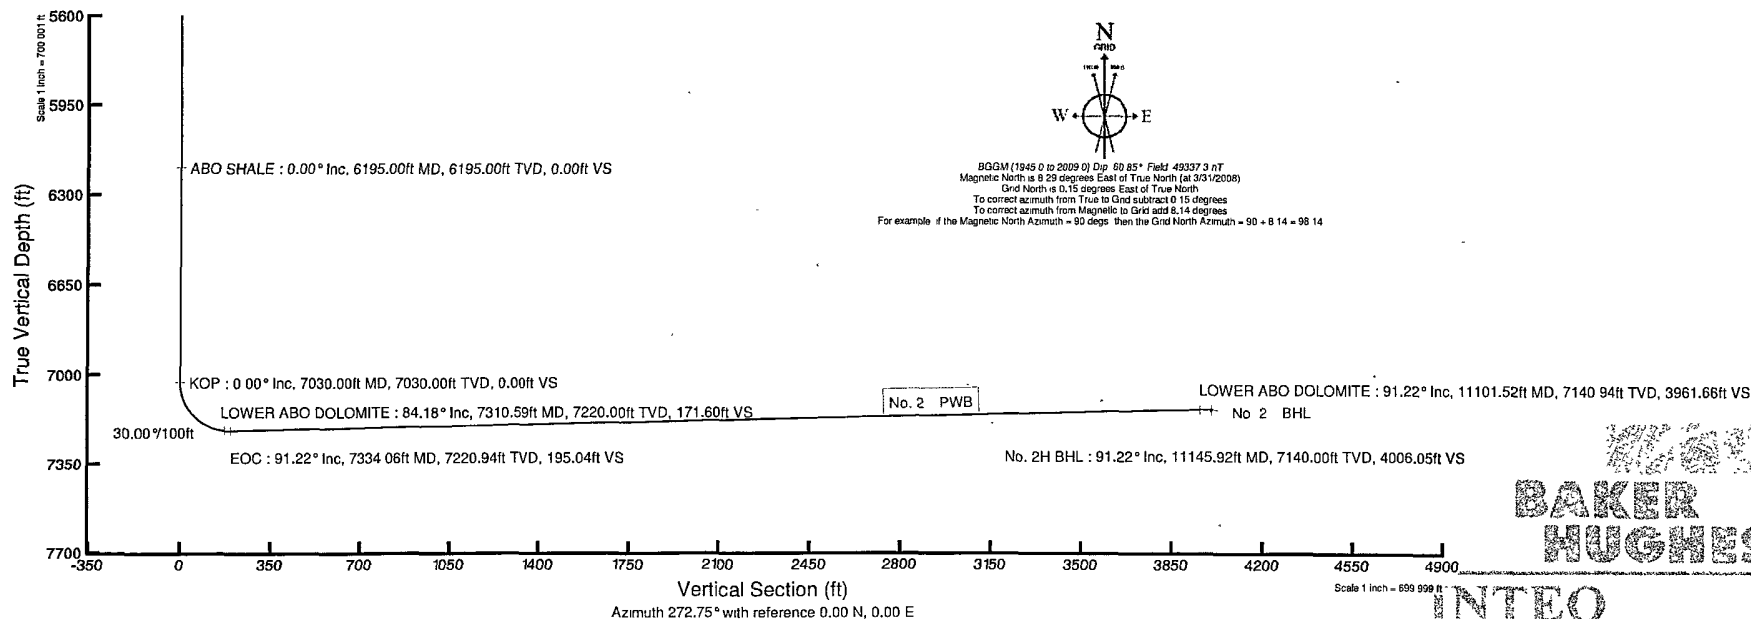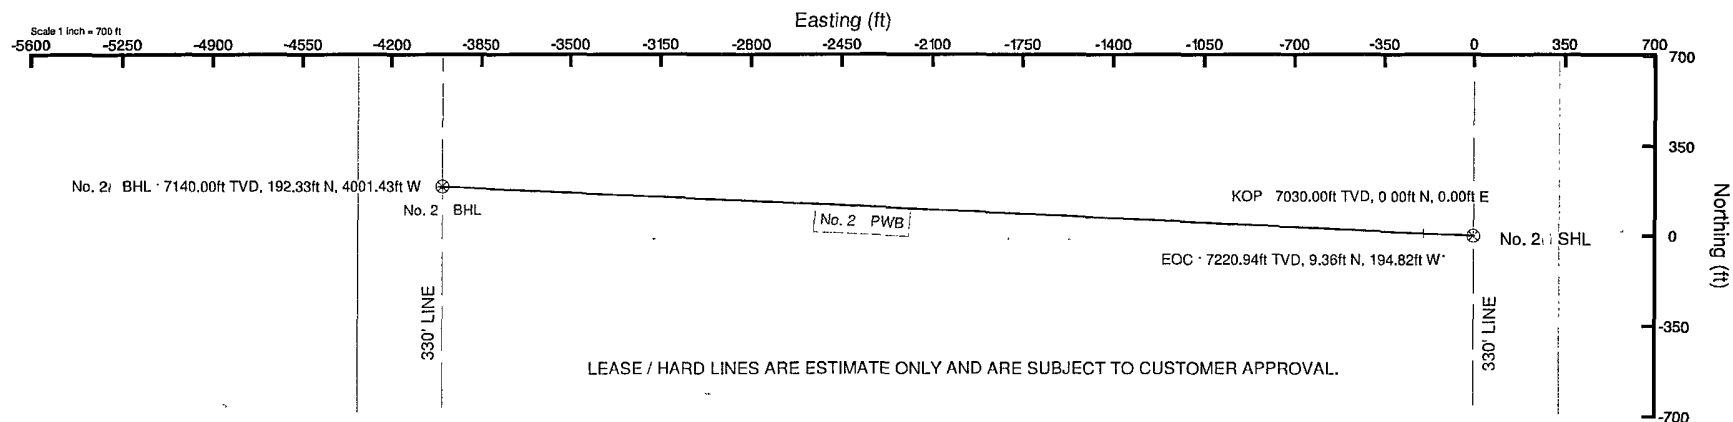

PROPOSED WELLPATH REPORT (CSV version)

Prepared by Baker Hughes INTEQ
Software System: WellArchitect®2.0

REFERENCE WELLPATH IDENTIFICATION

Operator Cimarex Energy Co.
Area Eddy County, NM
Field (Glycerin) Sec. 10, T16S, R29E
Facility Glycerin 10 Fed Com No. 2
Slot No. 2 SHL
Well No. 2
Wellbore No. 2 PWB
Wellpath Preliminary
Sidetrack (none)

REPORT SETUP INFORMATION

Projection : NAD83 / TM New Mexico State Planes, Eastern Zone (3001), US feet
North Refe Grid
Scale 0.999917
Convergen 0.15° East
Software S WellArchitect®
User Victor Hernandez
Report Ge 3/31/2008 at 7:37:57 AM
DataBase/ WA_Midland/ev1415.xml

WELLPATH	Local North	Local East	Grid East	Grid North	Latitude	Longitude
	[ft]	[ft]	[ft]	[ft]		
Slot Location	0	0	626677	704899.9	32°56'14.8"	104°03'18.601"W
Facility Ref			626677	704899.9	32°56'14.8"	104°03'18.601"W
Field Refer			626677	704899.9	32°56'14.8"	104°03'18.601"W

WELLPATH DATUM

Calculation Minimum curvature
Horizontal Facility Center
Vertical Re Rig on No. 2 SHL (RT)
MD Refere Rig on No. 2 SHL (RT)
Field Vertic Mean Sea Level
Rig on No. 18.00ft
Rig on No. 3737.00ft
Facility Ver 0.00ft
Section Ori 0.00ft
Section Ori 0.00ft
Section Azi 272.75°

WELLPATH DATA	Wellbore: No. 2 PWB	Wellpath: Preliminary	† = interpolated/extrapolate				
MD	Inclination	Azimuth	TVD	Vert Sect	North	East	DLS
[ft]	[°]	[°]	[ft]	[ft]	[ft]	[ft]	[°/100ft]
	0	0	272.752	0	0	0	0
†	100	0	272.752	100	0	0	0
†	200	0	272.752	200	0	0	0
†	300	0	272.752	300	0	0	0

†	400	0	272.752	400	0	0	0	0
†	500	0	272.752	500	0	0	0	0
†	600	0	272.752	600	0	0	0	0
†	700	0	272.752	700	0	0	0	0
†	800	0	272.752	800	0	0	0	0
†	900	0	272.752	900	0	0	0	0
†	1000	0	272.752	1000	0	0	0	0
†	1100	0	272.752	1100	0	0	0	0
†	1200	0	272.752	1200	0	0	0	0
†	1300	0	272.752	1300	0	0	0	0
†	1400	0	272.752	1400	0	0	0	0
†	1500	0	272.752	1500	0	0	0	0
†	1600	0	272.752	1600	0	0	0	0
†	1700	0	272.752	1700	0	0	0	0
†	1800	0	272.752	1800	0	0	0	0
†	1900	0	272.752	1900	0	0	0	0
†	2000	0	272.752	2000	0	0	0	0
†	2100	0	272.752	2100	0	0	0	0
†	2200	0	272.752	2200	0	0	0	0
†	2300	0	272.752	2300	0	0	0	0
†	2400	0	272.752	2400	0	0	0	0
†	2500	0	272.752	2500	0	0	0	0
†	2600	0	272.752	2600	0	0	0	0
†	2700	0	272.752	2700	0	0	0	0
†	2800	0	272.752	2800	0	0	0	0
†	2900	0	272.752	2900	0	0	0	0
†	3000	0	272.752	3000	0	0	0	0
†	3100	0	272.752	3100	0	0	0	0
†	3200	0	272.752	3200	0	0	0	0
†	3300	0	272.752	3300	0	0	0	0
†	3400	0	272.752	3400	0	0	0	0
†	3500	0	272.752	3500	0	0	0	0
†	3600	0	272.752	3600	0	0	0	0
†	3700	0	272.752	3700	0	0	0	0
†	3800	0	272.752	3800	0	0	0	0
†	3900	0	272.752	3900	0	0	0	0
†	4000	0	272.752	4000	0	0	0	0
†	4100	0	272.752	4100	0	0	0	0
†	4200	0	272.752	4200	0	0	0	0
†	4300	0	272.752	4300	0	0	0	0
†	4400	0	272.752	4400	0	0	0	0
†	4500	0	272.752	4500	0	0	0	0
†	4600	0	272.752	4600	0	0	0	0
†	4700	0	272.752	4700	0	0	0	0
†	4800	0	272.752	4800	0	0	0	0
†	4900	0	272.752	4900	0	0	0	0
†	5000	0	272.752	5000	0	0	0	0
†	5100	0	272.752	5100	0	0	0	0
†	5200	0	272.752	5200	0	0	0	0
†	5300	0	272.752	5300	0	0	0	0
†	5400	0	272.752	5400	0	0	0	0
†	5500	0	272.752	5500	0	0	0	0

†	5600	0	272.752	5600	0	0	0	0
†	5700	0	272.752	5700	0	0	0	0
†	5800	0	272.752	5800	0	0	0	0
†	5900	0	272.752	5900	0	0	0	0
†	6000	0	272.752	6000	0	0	0	0
†	6100	0	272.752	6100	0	0	0	0
†	6195	0	272.752	6195	0	0	0	0
†	6200	0	272.752	6200	0	0	0	0
†	6300	0	272.752	6300	0	0	0	0
†	6400	0	272.752	6400	0	0	0	0
†	6500	0	272.752	6500	0	0	0	0
†	6600	0	272.752	6600	0	0	0	0
†	6700	0	272.752	6700	0	0	0	0
†	6800	0	272.752	6800	0	0	0	0
†	6900	0	272.752	6900	0	0	0	0
†	7000	0	272.752	7000	0	0	0	0
	7030	0	272.752	7030	0	0	0	0
†	7100	21	272.752	7098.44	12.69	0.61	-12.67	30
†	7200	51	272.752	7178.42	70.79	3.4	-70.71	30
†	7300	81	272.752	7218.63	161.11	7.74	-160.92	30
†	7310.59	84.176	272.752	7220	171.6	8.24	-171.41	30
	7334.06	91.217	272.752	7220.94	195.04	9.36	-194.82	30
†	7400	91.217	272.752	7219.54	260.97	12.53	-260.67	0
†	7500	91.217	272.752	7217.42	360.95	17.33	-360.53	0
†	7600	91.217	272.752	7215.3	460.93	22.13	-460.39	0
†	7700	91.217	272.752	7213.17	560.9	26.93	-560.26	0
†	7800	91.217	272.752	7211.05	660.88	31.73	-660.12	0
†	7900	91.217	272.752	7208.93	760.86	36.53	-759.98	0
†	8000	91.217	272.752	7206.8	860.84	41.33	-859.84	0
†	8100	91.217	272.752	7204.68	960.81	46.13	-959.7	0
†	8200	91.217	272.752	7202.56	1060.79	50.93	-1059.57	0
†	8300	91.217	272.752	7200.43	1160.77	55.73	-1159.43	0
†	8400	91.217	272.752	7198.31	1260.75	60.53	-1259.29	0
†	8500	91.217	272.752	7196.18	1360.72	65.33	-1359.15	0
†	8600	91.217	272.752	7194.06	1460.7	70.13	-1459.02	0
†	8700	91.217	272.752	7191.94	1560.68	74.93	-1558.88	0
†	8800	91.217	272.752	7189.81	1660.66	79.73	-1658.74	0
†	8900	91.217	272.752	7187.69	1760.63	84.53	-1758.6	0
†	9000	91.217	272.752	7185.57	1860.61	89.33	-1858.46	0
†	9100	91.217	272.752	7183.44	1960.59	94.13	-1958.33	0
†	9200	91.217	272.752	7181.32	2060.56	98.93	-2058.19	0
†	9300	91.217	272.752	7179.2	2160.54	103.73	-2158.05	0
†	9400	91.217	272.752	7177.07	2260.52	108.53	-2257.91	0
†	9500	91.217	272.752	7174.95	2360.5	113.33	-2357.78	0
†	9600	91.217	272.752	7172.83	2460.47	118.13	-2457.64	0
†	9700	91.217	272.752	7170.7	2560.45	122.93	-2557.5	0
†	9800	91.217	272.752	7168.58	2660.43	127.73	-2657.36	0
†	9900	91.217	272.752	7166.46	2760.41	132.53	-2757.22	0
†	10000	91.217	272.752	7164.33	2860.38	137.33	-2857.09	0
†	10100	91.217	272.752	7162.21	2960.36	142.13	-2956.95	0
†	10200	91.217	272.752	7160.09	3060.34	146.93	-3056.81	0
†	10300	91.217	272.752	7157.96	3160.32	151.73	-3156.67	0

†	10400	91.217	272.752	7155.84	3260.29	156.53	-3256.53	0
†	10500	91.217	272.752	7153.72	3360.27	161.33	-3356.4	0
†	10600	91.217	272.752	7151.59	3460.25	166.13	-3456.26	0
†	10700	91.217	272.752	7149.47	3560.23	170.93	-3556.12	0
†	10800	91.217	272.752	7147.35	3660.2	175.73	-3655.98	0
†	10900	91.217	272.752	7145.22	3760.18	180.53	-3755.85	0
†	11000	91.217	272.752	7143.1	3860.16	185.33	-3855.71	0
†	11100	91.217	272.752	7140.98	3960.14	190.13	-3955.57	0
†	11101.52	91.217	272.752	7140.94	3961.66	190.2	-3957.09	0
	11145.92	91.217	272.752	7140	4006.05	192.33	-4001.43	0

T A R G E T S

Name	MD [ft]	TVD [ft]	North [ft]	East [ft]	Grid East [srv ft]	Grid North [srv ft]	Latitude	Longitude
(1) No. 2 B	11145.92	7140	192.33	-4001.43	622675.9	705092.2	32°56'16.9"	104°04'05.0"

SURVEY PROGRAM Ref Wellbore: No. 2 PWB Ref Wellpath: Preliminary

Start MD [ft]	End MD [ft]	Pos Unc	M Log Name/ Wellbore
18	11145.92	NaviTrak (Standard)	No. 2 PWB

Patterson Rig 74

Cimarex Energy Co. of Colorado


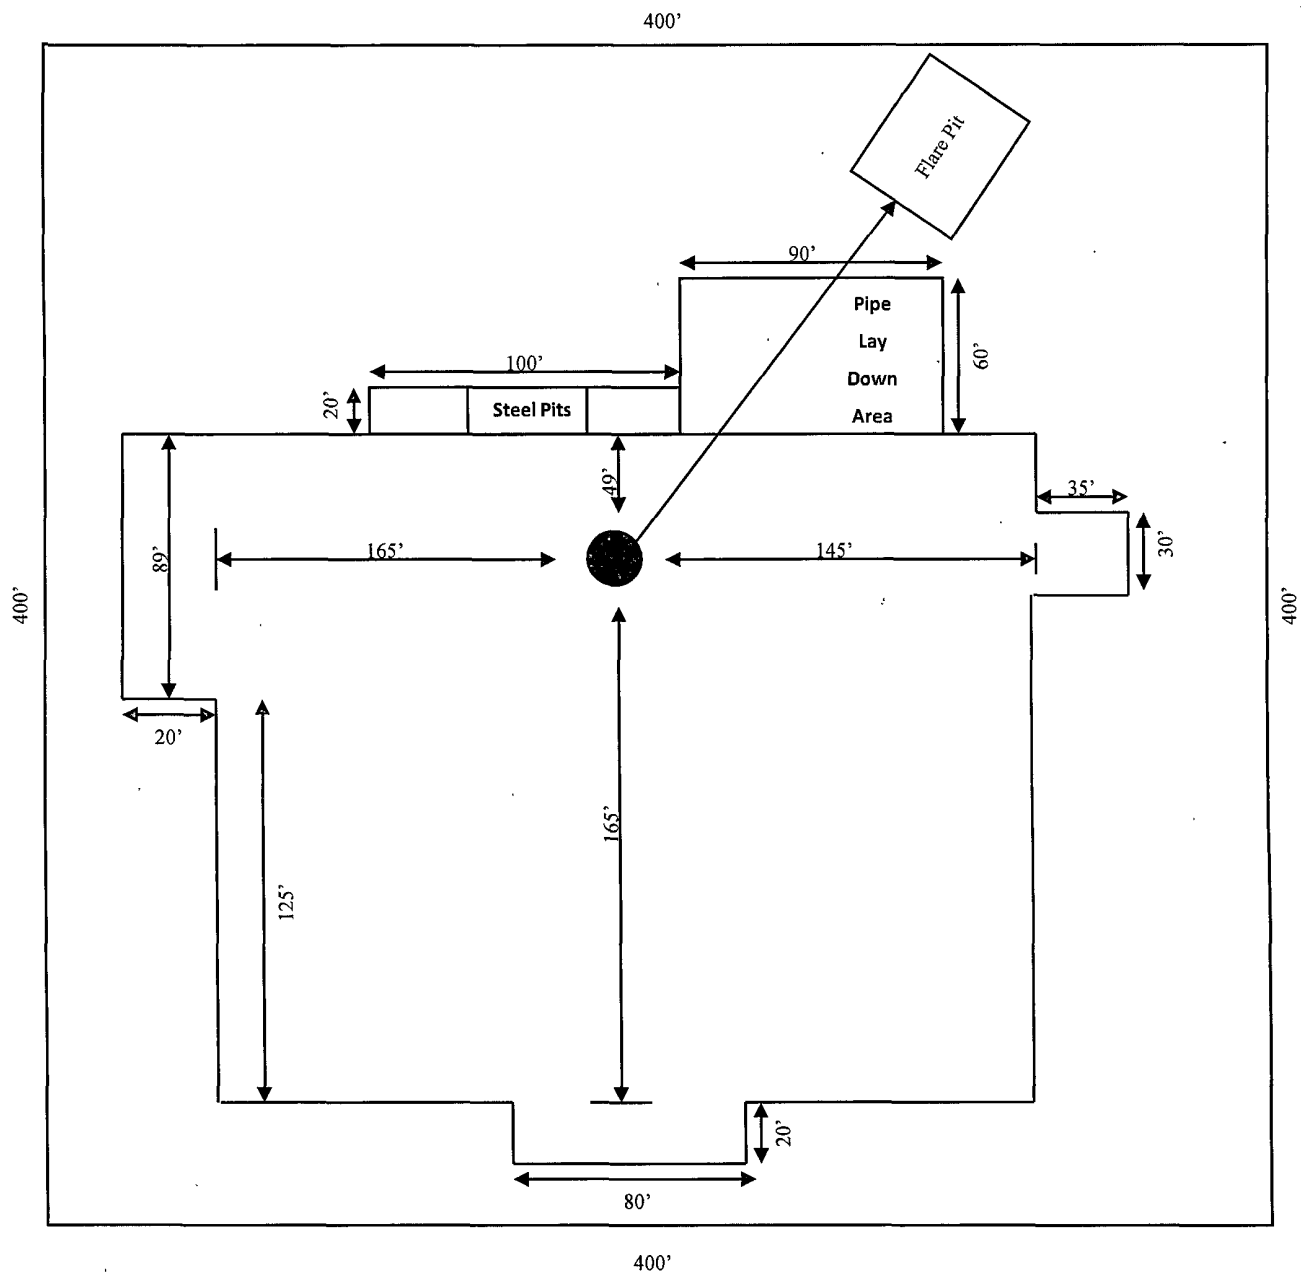


Exhibit D – Rig Layout
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
10-16S-29E
SHL 2180' FNL & 330' FEL
BHL 1980' FNL & 330' FWL
Eddy County, NM

SR & A

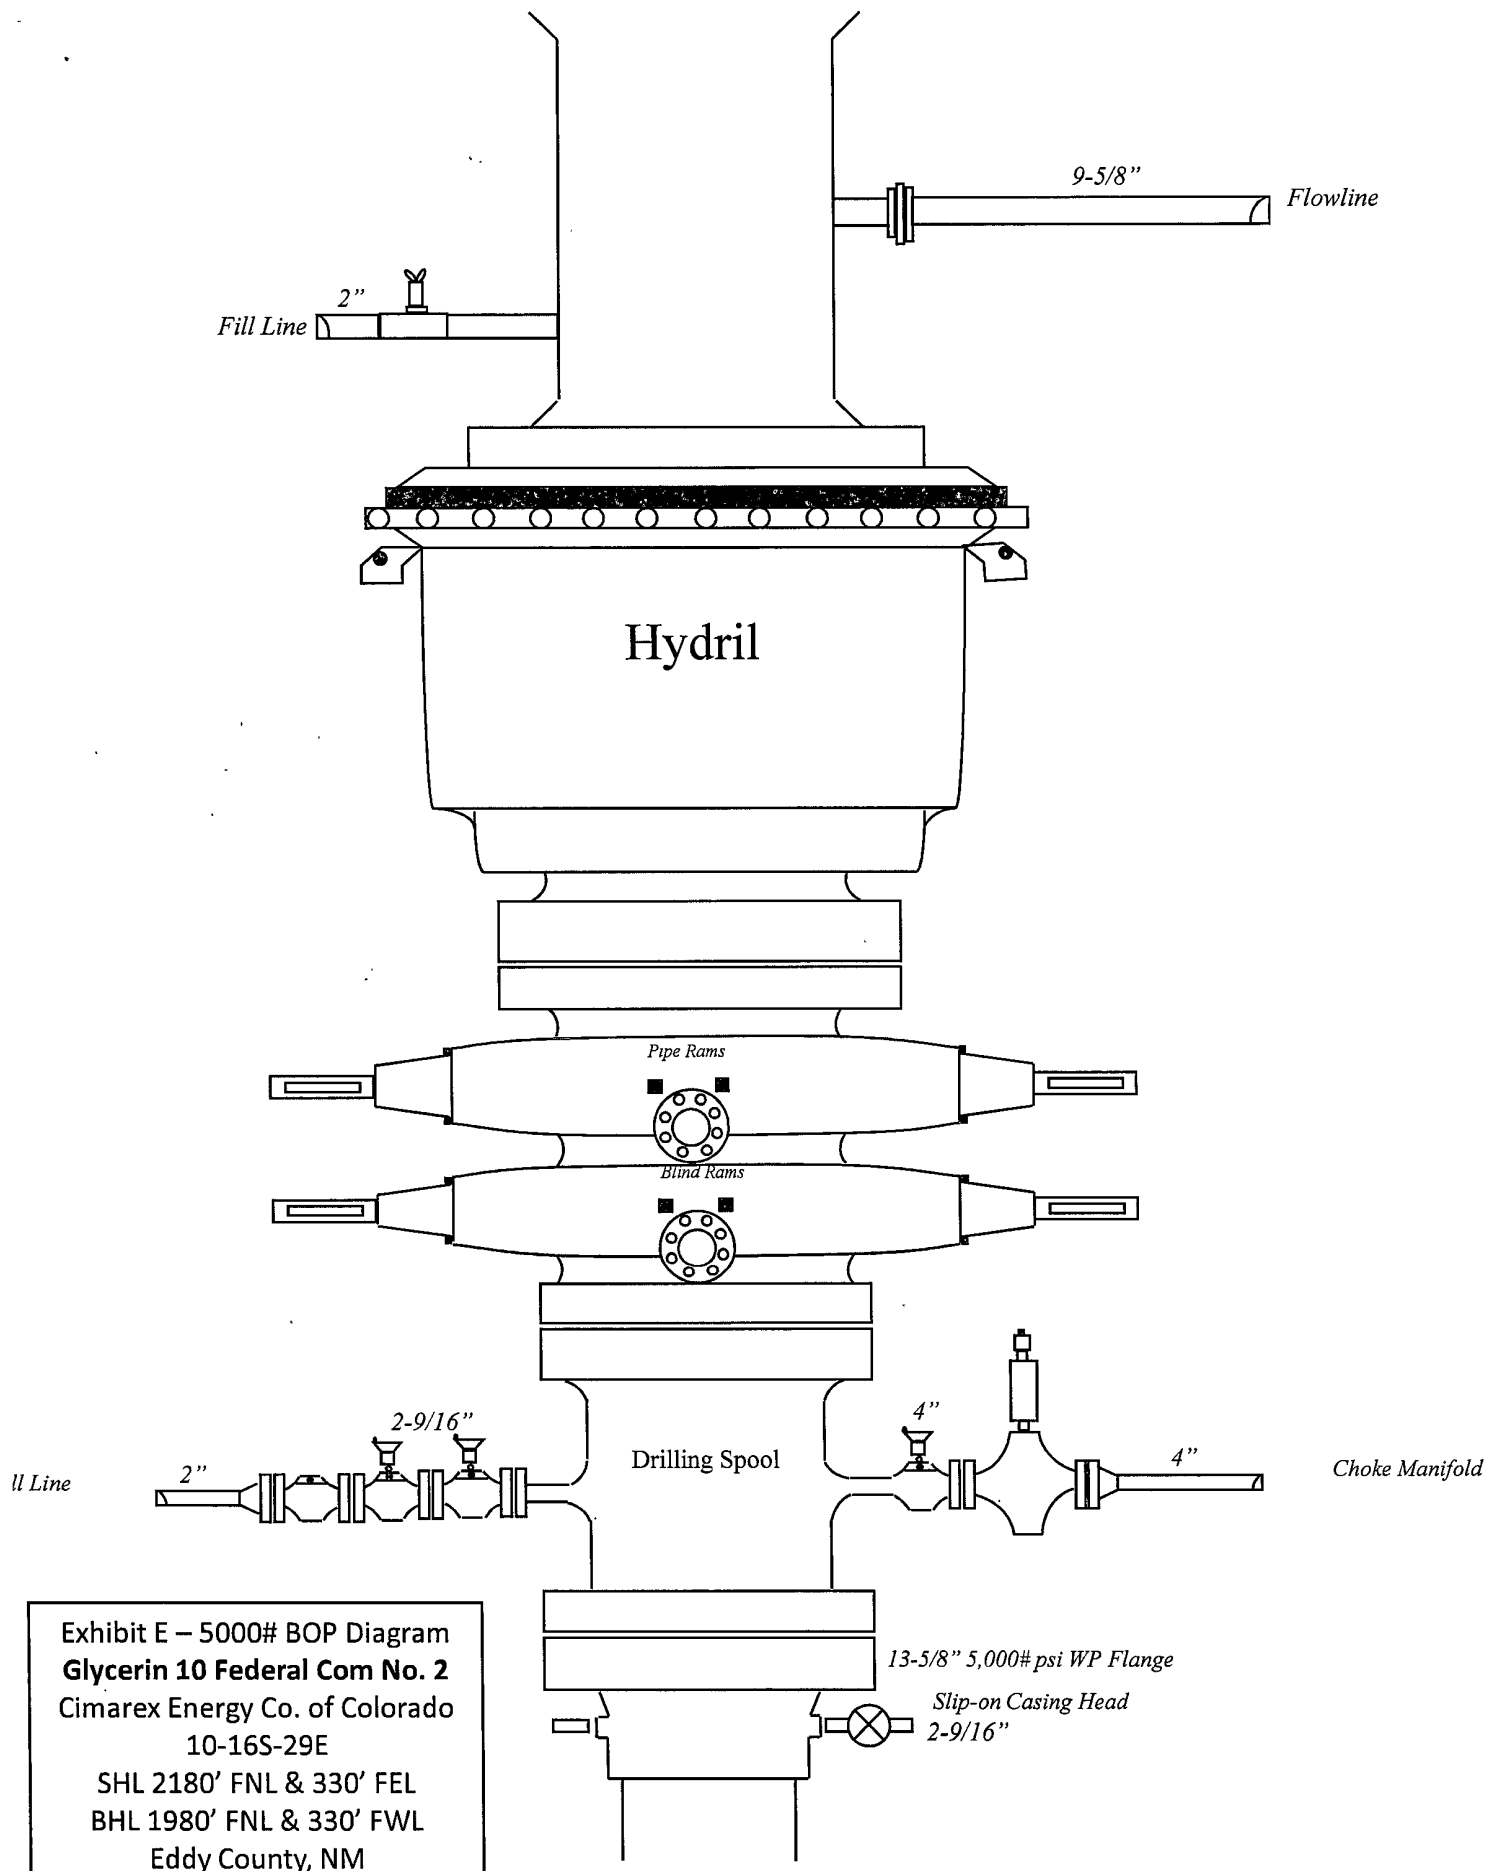

**DRILLING OPERATIONS
CHOKE MANIFOLD
SM SERVICE**

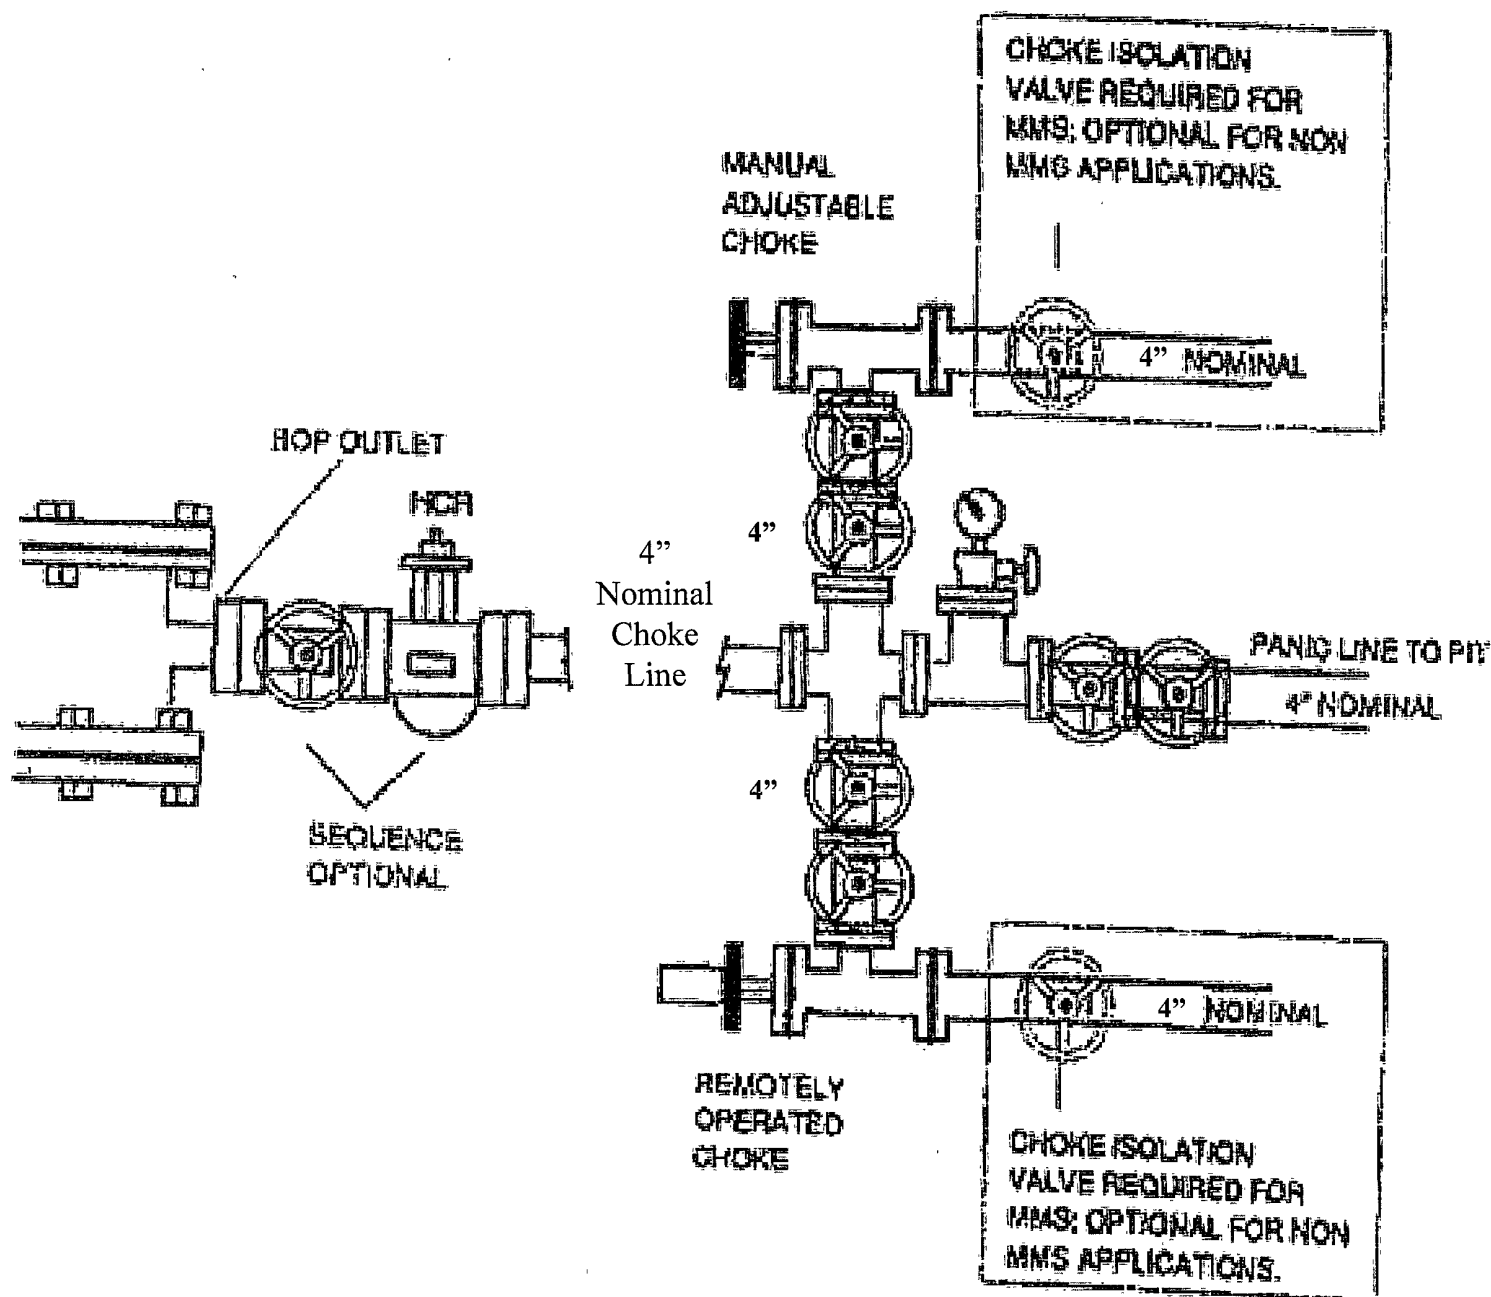


Exhibit E-1 – Choke Manifold Diagram
Glycerin 10 Federal Com No. 2
 Cimarex Energy Co. of Colorado
 10-16S-29E
 SHL 2180' FNL & 330' FEL
 BHL 1980' FNL & 330' FWL
 Eddy County, NM

Hydrogen Sulfide Drilling Operations Plan
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

- 1 All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
- 2 H₂S Detection and Alarm Systems:
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of flow line (mud pit) and on derrick floor or doghouse.
- 3 Windsock and/or wind streamers:
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
- 4 Condition Flags and Signs:
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag indicates normal safe condition. Yellow flag indicates potential pressure and danger. Red flag indicates danger (H₂S present in dangerous concentration). Only emergency personnel admitted to location.
- 5 Well control equipment:
 - A. See exhibit "E"
- 6 Communication:
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
- 7 Drillstem Testing:

No DSTs or cores are planned at this time.
- 8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
- 9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

H₂S Contingency Plan
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- ★ Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- ★ Evacuate any public places encompassed by the 100 ppm ROE.
- ★ Be equipped with H₂S monitors and air packs in order to control the release.
- ★ Use the "buddy system" to ensure no injuries occur during the response.
- ★ Take precautions to avoid personal injury during this operation.
- ★ Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- ★ Have received training in the:
 - ◆ Detection of H₂S, and
 - ◆ Measures for protection against the gas,
 - ◆ Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air=1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air=1	2 ppm	N/A	1000 ppm

Contacting Authorities

Cimarex Energy Co. of Colorado's personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Cimarex Energy Co. of Colorado's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

H₂S Contingency Plan Emergency Contacts
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

<u>Company Office</u>			
Cimarex Energy Co. of Colorado		800-969-4789	
Co. Office and After-Hours Menu			
<u>Key Personnel</u>			
Name	Title	Office	Mobile
Doug Park	Drilling Manager	972-443-6463	972-333-1407
Dee Smith	Drilling Super	972-443-6491	972-882-1010
Jim Evans	Drilling Super	972-443-6451	972-465-6564
Dorsey Rogers	Field Super		505-200-6105
Roy Shirley	Field Super		432-634-2136
<hr/>			
<u>Artesia</u>			
Ambulance		911	
State Police		575-746-2703	
City Police		575-746-2703	
Sheriff's Office		575-746-9888	
Fire Department		575-746-2701	
Local Emergency Planning Committee		575-746-2122	
New Mexico Oil Conservation Division		575-748-1283	
<hr/>			
<u>Carlsbad</u>			
Ambulance		911	
State Police		575-885-3137	
City Police		575-885-2111	
Sheriff's Office		575-887-7551	
Fire Department		575-887-3798	
Local Emergency Planning Committee		575-887-6544	
US Bureau of Land Management		575-887-6544	
<hr/>			
<u>Santa Fe</u>			
New Mexico Emergency Response Commission (Santa Fe)		505-476-9600	
New Mexico Emergency Response Commission (Santa Fe) 24 Hrs		505-827-9126	
New Mexico State Emergency Operations Center		505-476-9635	
<hr/>			
<u>National</u>			
National Emergency Response Center (Washington, D.C.)		800-424-8802	
<hr/>			
<u>Medical</u>			
Flight for Life - 4000 24th St.; Lubbock, TX		806-743-9911	
Aerocare - R3, Box 49F; Lubbock, TX		806-747-8923	
Med Flight Air Amb - 2301 Yale Blvd S.E., #D3; Albuquerque, NM		505-842-4433	
SB Air Med Service - 2505 Clark Carr Loop S.E.; Albuquerque, NM		505-842-4949	
<hr/>			
<u>Other</u>			
Boots & Coots IWC		800-256-9688	or 281-931-8884
Cudd Pressure Control		432-699-0139	or 432-563-3356
Halliburton		575-746-2757	
B.J. Services		575-746-3569	
<hr/>			

Surface Use Plan
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

- 1 Existing Roads: Area maps, Exhibit "B" is a reproduction of Eddy Co. General Highway Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing roads and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
 - A. Exhibit "A" shows the proposed well site as staked.
 - B. From junction of US Hwy 82 and Barnival Draw Rd, go North on Barnival Draw for 6.8 miles to lease road. On lease road, continue Northwesterly 3.5 miles to gate. Go Southeast 0.7 miles, thence Southwest 0.7 miles to lease road. Go West 0.2 miles to proposed lease road.
- 2 Planned Access Roads: 3223.3' of access road is proposed, 1270.5' of which will be on-lease. BLM ROW will be acquired.
- 3 Location of Existing Wells in a One-Mile Radius - Exhibit A
 - A. Water wells - None known
 - B. Disposal wells - None known
 - C. Drilling wells - None known
 - D. Producing wells - As shown on Exhibit "A"
 - E. Abandoned wells - As shown on Exhibit "A"
- 4 If on completion this well is a producer, Cimarex Energy Co. of Colorado will furnish maps and/or plats showing on site facilities or off site facilities if needed. This will be accompanied by a Sundry Notice.
- 5 Location and Type of Water Supply:

Water will be purchased locally from a commercial source and trucked over the access roads or piped in flexible lines laid on top of the ground.
- 6 Source of Construction Material:

If possible, construction will be obtained from the excavation of drill site. If additional material is needed, it will be purchased from a local source and transported over the access route as shown on Exhibit "C".

Surface Use Plan
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

7 Methods of Handling Waste Material:

- A. Drill cuttings will be separated by a series of solids removal equipment and stored in steel containment pits and then hauled to a state-approved disposal facility.
- B. All trash, junk and other waste material will be contained in trash cages or bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by supplier including broken sacks.
- D. Sewage from living quarters will drain into holding tanks and be cleaned out periodically. A Porta-John will be provided for the rig crews. This equipment will be properly maintained during the drilling operations and removed upon completion of the well.
- E. Drilling fluids will be contained in steel pits in a closed circulating system. Fluids will be cleaned and reused. Water produced during testing will be contained in the steel pits and disposed of at a state approved disposal facility. Any oil or condensate produced will be stored in test tanks until sold and hauled from the site.

8 Ancillary Facilities:

- A. No camps or airstrips to be constructed.

9 Well Site Layout:

- A. Exhibit "D" shows location and rig layout.
- C. Mud pits in the closed circulating system will be steel pits and the cuttings will be stored in steel containment pits.
- D. Cuttings will be stored in steel pits until they are hauled to a state-approved disposal facility.
- E. If the well is a producer, those areas of the location not essential to production facilities will be reclaimed and seeded per BLM requirements.

10 Plans for Restoration of Surface:

Rehabilitation of the location will start in a timely manner after all drilling operations cease. The type of reclamation will depend on whether the well is a producer or a dry hole.

Drainage systems, if any, will be reshaped to the original configuration with provisions made to alleviate erosion. These may need to be modified in certain circumstances to prevent inundation of the location's pad and surface facilities. After the area has been shaped and contoured, topsoil from the spoil pile will be placed over the disturbed area to the extent possible. Revegetation procedures will comply with BLM standards.

If the well is a dry hole, the pad and road area will be recountoured to match the existing terrain. Topsoil will be spread to the extent possible. Revegetation will comply with BLM standards.

Should the well be a producer, the previously noted procedures will apply to those areas which are not required for production facilities.

Surface Use Plan
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

11 Other Information

- A. Topography consists of a sloping plane with loose tan sands. Vegetation is mainly yucca, mesquite and shin oak.
- B. The wellsite is on surface owned by the Bureau of Land Management. The land is used mainly for farming, cattle ranching, recreational use, and oil and gas production.
- C. An Archaeological survey will be conducted on the location and proposed roads, and this report will be filed with the Bureau of Land Management in the Carlsbad BLM office.
- D. There are no know dwellings within 1½ miles of this location.

Operator Certification Statement
Glycerin 10 Federal Com No. 2
Cimarex Energy Co. of Colorado
Unit H, Section 10
T16S-R29E, Eddy County, NM

Operator's Representative

Cimarex Energy Co. of Colorado
P.O. Box 140907
Irving, TX 75014
Office Phone: (972) 443-6489
Zeno Farris

CERTIFICATION: I hereby certify that the statements and plans made in this APD are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by Cimarex Energy Co. of Colorado and/or its contractors/subcontractors and is in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME: Zeno Farris
Zeno Farris
DATE: April 4, 2008
TITLE: Manager Operations Administration

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Cimarex Energy Co of Colorado
LEASE NO.:	NMNM119268
WELL NAME & NO.:	Glycerin 10 Federal Com No 2
SURFACE HOLE FOOTAGE:	2180' FNL & 330' FEL
BOTTOM HOLE FOOTAGE:	1980' FNL & 330' FWL
LOCATION:	Section 10, T. 16 S., R 29 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Hydrology
- ☒ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☒ **Road Section Diagram**
- ☒ **Drilling**
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☒ **Interim Reclamation**
- ☐ **Final Abandonment/Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Mitigation Measures: The mitigation measures include the Pecos District Conditions of Approval, the standard stipulation for permanent resource roads, and some basic mitigation for playas. In order to better protect the playas in the area the cuttings and fluids will need to be hauled off location to an approved disposal facility. Also the well pad locations themselves need to have berms placed around the tank batteries as well as the pads. This will help to prevent any contaminants from running off the pad location into the nearby playas.

Glycerin 10 Federal Com. # 2: Closed Loop V-Door North

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (505) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

Closed Loop System V-Door North

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

C. FEDERAL MINERAL MATERIALS PIT

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.

Payment shall be made to the BLM prior to removal of any additional federal mineral materials from any site other than the reserve pit. Call the Carlsbad Field Office at (505) 234-5972.

D. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

E. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.


Ditching

Ditching shall be required on both sides of the road.

Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

Standard Turnout – Plan View

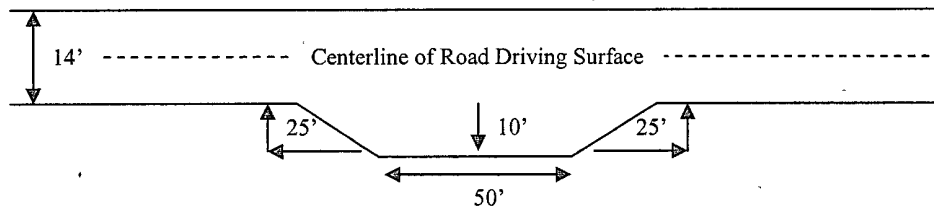


Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and inslaping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

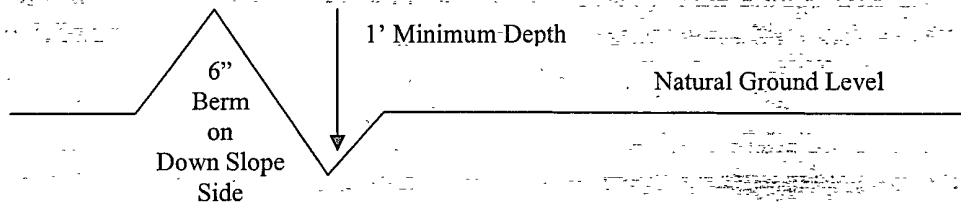

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Culvert Installations

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

Fence Requirement


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

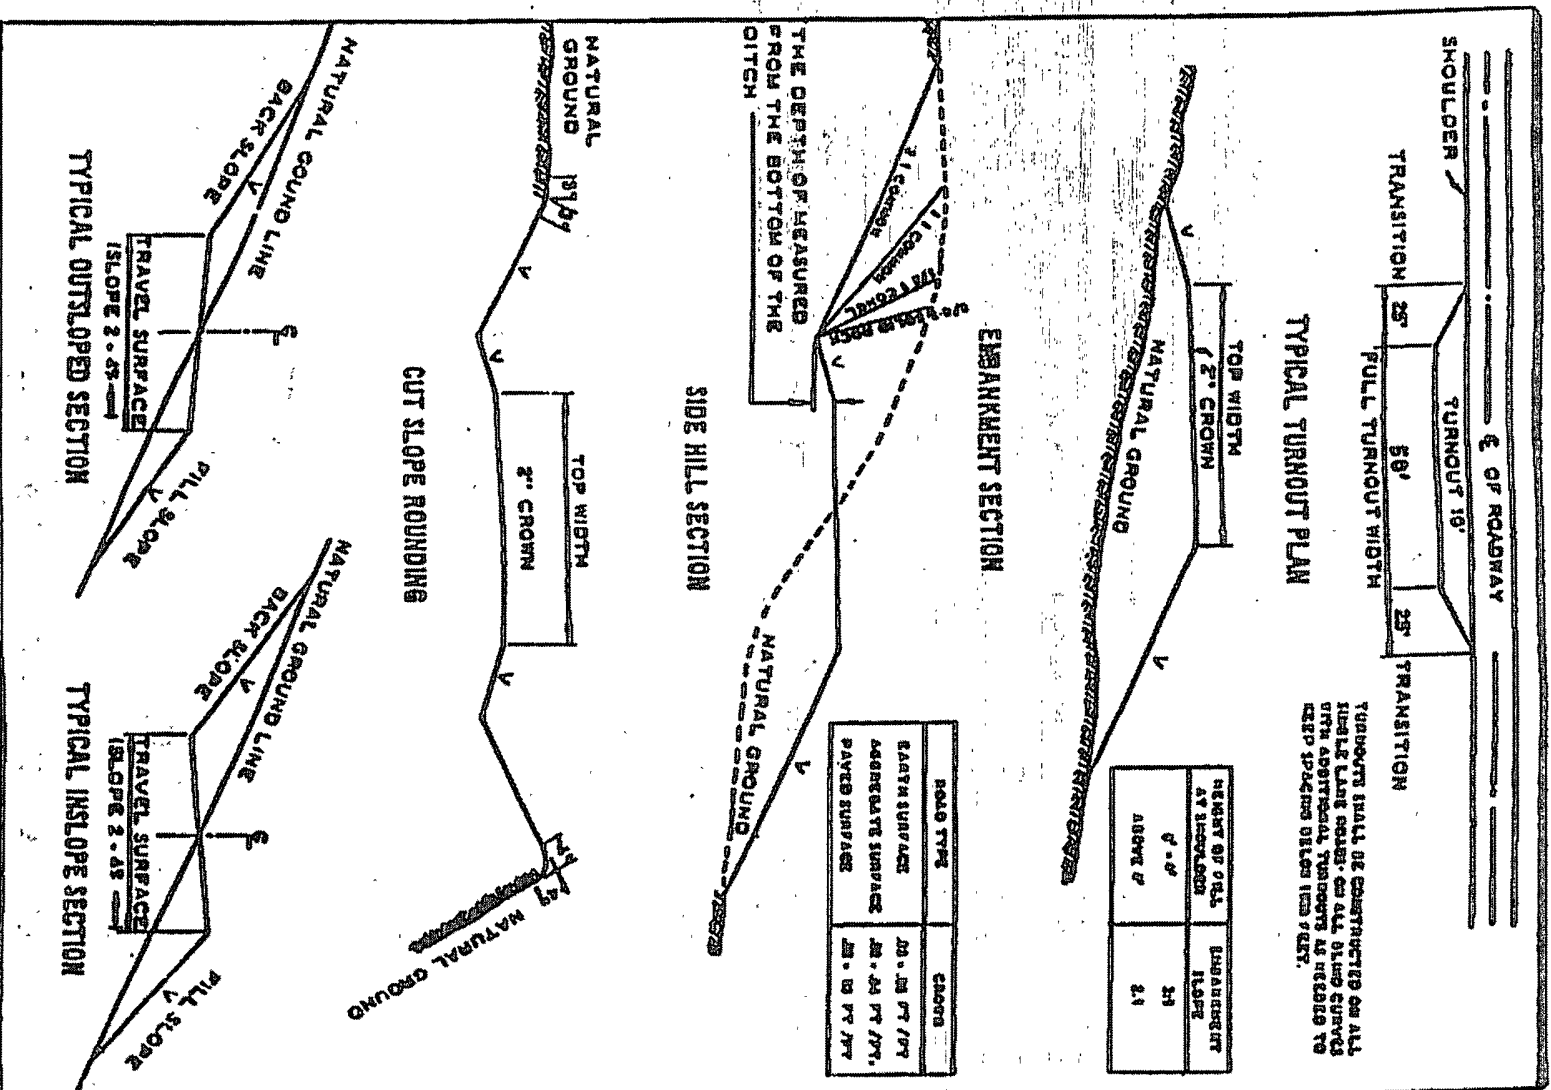

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified a minimum of **4 hours** in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOP/BOPE tests

☒ Chaves and Roosevelt Counties, T16S Eddy County
Call the Roswell Field Office, 2909 West Second St., Roswell, NM 88201
(575) 627-0205 and (575) 361-2822.

1. **Hydrogen Sulfide has been reported as a hazard in the area but there are no measured amounts recorded. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If Hydrogen Sulfide is encountered, please report measured amounts and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.

B. CASING

Changes to the approved APD casing and cement program require submitting a sundry and receiving approval prior to work.

Centralizers required on surface casing as per Onshore Order 2.III.B.1.f

H2S reported in area

Possible lost circulation in Grayburg, San Andres Formations

Possible high pressure gas bursts from the Wolfcamp Formation – applicable to pilot hole

1. The 13-3/8 inch surface casing shall be set at approximately 400 feet and cemented to the surface. If salt is encountered at a depth less than 400 feet, surface casing should be set 25 feet above the top of the salt. Fresh water mud shall be used to setting depth.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement).
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

- ☒ Cement to surface. If cement does not circulate see B.1.a-e above.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing

Formation below the 9-5/8" shoe to be tested according to Onshore order 2.III.B.1.i

3. The minimum required fill of cement behind the 7 inch pilot hole casing is:

- ☒ Cement should tie-back at least 200 feet into previous casing string. **Operator shall provide method of verification.**

Formation below the kick off point to be tested according to Onshore Order 2.III.B.1.i.

Tag cement at bottom of pilot hole and report on subsequent report. NOTE: Pilot hole will require proper plug when well is plugged.

4. The minimum required fill of cement behind the 4-1/2 inch production casing is:

- ☒ **Not required as operator is using Peak Iso-Pak liner. Seal on Peak Systems Iso-Pack liner is to be tested per Onshore Oil and Gas Order 2.III.B.1.b. Please call BLM for witness of seal test.**

5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. The appropriate BLM office shall be notified a minimum of **4 hours** in advance for a representative to witness the tests.
 - a. The tests shall be done by an independent service company.
 - b. The results of the test shall be reported to the appropriate BLM office.
 - c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.
 - e. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the **Wolfcamp** Formation **if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days**. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.
 - f. A variance to test only the surface casing to the reduced pressure of **1000 psi** with the rig pumps is approved. **The BOP/BOPE will be tested to 3000 psi by an independent service company.**

D. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

E. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

LB 5/12/08

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Containment Structures

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color
Shale Green, Munsell Soil Color Chart # 5Y 4/2

IX. INTERIM RECLAMATION & RESERVE PIT CLOSURE

A. INTERIM RECLAMATION

If the well is a producer, interim reclamation shall be conducted on the well site in accordance with the orders of the Authorized Officer. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

At the time the well pad is to be reclaimed, operators should work with BLM surface management specialists to devise the best strategies to reduce the size of the location. Any reductions should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

Seed Mixture 1, for Loamy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains lovegrass (<i>Eragrostis intermedia</i>)	0.5
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sideoats grama (<i>Bouteloua curtipendula</i>)	5.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

X. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS

Upon abandonment of the well and/or when the access road is no longer in service the Authorized Officer shall issue instructions and/or orders for surface reclamation and restoration of all disturbed areas.

On private surface/federal mineral estate land the reclamation procedures on the road and well pad shall be accomplished in accordance with the private surface land owner agreement.

COPY

United States Department of the Interior
Bureau of Land Management
Carlsbad Field Office

Refer To: 3160-3

April 12, 2008

To: AFM, Lands & Minerals, CFO

From: Geologist, CFO

Subject: Geologic Review of Application for Permit to Drill

Operator: Cimarex Energy Company of Colorado

Well Name and Number: Glycerin 10 Federal Com. No. 2

Location: 2180' FNL & 330' FEL (SHL)
1980' FNL & 330' FWL (BHL)

Section: 10, T. 16 S., R. 29 E., NMPM

County: Eddy

State: NM

Lease No.: NM-15007

Date APD Rec'd: 04/08/08

1. Surface Elevation **3,719'** Surface Geology **Quaternary Aeolian**

2. Geologic Marker Tops (from reports on surrounding wells):

<u>Geologic Marker</u>	<u>Depth</u>
Yates	377'
Seven Rivers	517'
Queen	1142'
San Andres	1841'
Glorieta	3285'
Tubb	4592'
Abo	5352'
Wolfcamp	6748'
Cisco	7563'
Canyon	8174'
Strawn	8546'
Atoka	8849'
Morrow	9098'

Marker tops taken from the Crow Flats 3 Federal No. 1 located in the SW $\frac{1}{4}$ SW $\frac{1}{4}$, sec. 3, T. 16 S., R. 28 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Top of Salt	242'
Base of Salt	722'

Marker beds taken from the log of the Beavertail No. 1 well located in the SW $\frac{1}{4}$ SE $\frac{1}{4}$, sec. 36 T. 16 S., R. 28 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Top of Salt	345'
Base of Salt	765'
Yates	820'
Queen	1728'
Grayburg	2120'
Premier	2250'

Marker beds taken from the log of the Continental Federal No. 1 well located in the NE $\frac{1}{4}$ NE $\frac{1}{4}$, sec. 28 T. 16 S., R. 29 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Queen	1710'
San Andres	2480'
Abo	5646'
Wolfcamp	7190'
Atoka	9978'
Mississippian	10,433'

Marker beds taken from the log of the Conoco 22 Federal No. 1 well located in the SE $\frac{1}{4}$ NW $\frac{1}{4}$, sec. 22 T. 16 S., R. 29 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Yates	714'
Seven Rivers	873'
Queen	1452'
Queen Penrose	1689'

Marker beds taken from the log of the High Lonesome Federal No. 4 well located in the NW $\frac{1}{4}$ NE $\frac{1}{4}$, sec. 18 T. 16 S., R. 29 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Salt	394'
Seven Rivers	1140'
Queen	1754'
San Andres	2020'

Marker beds taken from the log of the High Lonesome Queen Federal No. 1 well located in the SE $\frac{1}{4}$ SE $\frac{1}{4}$, sec. 10 T. 16 S., R. 29 E., NMPM

<u>Geologic Marker</u>	<u>Depth</u>
Top of Salt	490'
Base of Salt	935'
Yates	1097'
Queen	1867'
San Andres	2673'

Marker beds taken from the log of the Farmer Federal No. 2 well located in the NE $\frac{1}{4}$ SE $\frac{1}{4}$, sec. 12 T. 16 S., R. 29 E., NMPM

3. Fresh Water Information: Fresh water for stock is obtained from the Quaternary Alluviums and the Artesia Group. The data on the State Engineers list is very questionable in this area because the base of the Artesia Group is approximately 2,200 ft for this section. The depths listed on the Engineers list and listed as Artesia Group is in tens of feet which actually puts the interval in the Triassic redbeds.

According to the IWR for the Smith 2 well located in the NW $\frac{1}{4}$ SW $\frac{1}{4}$, sec. 31 the top of the salt occurs at an approximate depth of 245 ft. The IWR for the Continental No. 1 well located in the NE $\frac{1}{4}$ NE $\frac{1}{4}$, sec. 28 T. 16 S., R. 29 E., NMPM shows the top of the salt at 345 feet. The IWR for the Farmer Federal No. 2 shows the top of the salt at 490 feet.

Deepest Expected Fresh Water: above 490'

Does Surface Casing cover all anticipated usable fresh water zones? No

If no, set surface casing to approximately 400 feet within the Rustler Formation. Top of San Andres is expected to be approximately 2,670 feet.

Controlled Water Basin: Yes

Capitan Carlsbad Roswell X Lea No basin

Remarks: The top of the Rustler Formation is approximately 300 feet and the top of the salt section may be as shallow as 394 feet. If the salt is encountered at a depth less than 400 feet, surface casing should be set in the Rustler Formation approximately 25 feet above the top of the salt and the operator should then switch over to drilling with brine.

4. Geologic Hazards? Yes

H₂S ☒

Karst

Abnormal Pressures

Other ☒

Remarks: Although H₂S has been reported in the area there are no measured amounts of H₂S available. The operator has acknowledged that there is a potential H₂S hazard for this well. If any H₂S is encountered, report the findings to the BLM including the amount of H₂S and what formation is producing this gas. Possible loss of circulation in the Grayburg and San Andres Formations. There is a low potential for the occurrence of karst type feature in the area. This is an Abo horizontal well and the Wolfcamp Formation will be penetrated by the pilot hole. The estimated bottom hole pressure is expected to be approximately 4,600psi. with estimated pressures at the surface possibly reaching 2,950psi.

5. Other Mineral Deposits: Possible Halite and other associated salts in the Rustler Formation and the Salado and Castile Groups.

6. Potash:

Secretary's

Oil-Potash Area

R-111-P Area

Not Applicable ☒

7. Reference Geologic APD Review Report for: Lease No.

Well Name & No.:

Location:

8. Other References:

New Mexico State Engineer's Water Well Listings;

Eddy County H₂S List;


Nicholson, A., Jr., and Clebsch, A., Jr., 1961, Geology and Ground-Water Conditions of Southern Lea County, New Mexico; Ground-Water Report No. 6, New Mexico Bureau of Mines and Mineral Resources, Campus Station, Socorro, New Mexico.

Hudson, J.D., and Borton, R.L., 1983, Ground-Water levels in New Mexico, 1976-1980, Basic Data Report, New Mexico State Engineer's Office.

Oil and Gas Historical well files

9. No active mining claims are located in this vicinity.

Geologist Signature:



Date: 04/12/08