

Submit 3 Copies To Appropriate District Office
District I
1625 W. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 19, 2008

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SEP 16 2009

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-005-62642
1. Type of Well: Oil Well ☐ Gas Well ☒ Other		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Yates Petroleum Corporation		6. State Oil & Gas Lease No. LG-4920
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210		7. Lease Name or Unit Agreement Name Ibis XU State Com
4. Well Location Unit Letter G : 1650 feet from the North line and 1980 feet from the East line Section 25 Township 9S Range 26E NMPM Chaves County		8. Well Number 3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3814'GR		9. OGRID Number 025575
		10. Pool name or Wildcat Foor Ranch; Pre-Permian

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

**Notify OCD 24 hrs. prior
To any work done.**

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU WSU. Rig up safety equipment as needed. No casing recovery will be attempted.
 2. Set a CIBP at 5860' and top with 35' cement. This puts a plug over the Ordovician perforations.
 3. Set a CIBP at 5210' and top with 35' cement. This puts a plug over the Wolfcamp perforations.
 4. Perforate and spot a 35 sx Class "C" cement plug from 4494'-4594'. This puts 100' plug across the top of the Abo, inside and outside casing. WOC and tag plug.
 5. Perforate and spot a 35 sx Class "C" cement plug from 2259'-2359'. This puts 100' plug across the top of the Glorieta, inside and outside casing. WOC and tag plug.
 6. Spot a 25 sx Class "C" cement plug from 1135'-1235'. This puts 100' plug across the surface casing shoe. WOC and tag plug.
 7. Spot a 15 sx Class "C" cement plug from 60' up to the surface.
 8. Remove all surface equipment, weld dry hole marker and clean location as per regulations.
- NOTE: Yates Petroleum Corporation will use steel pits and no earth pits

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE September 14, 2009

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168


For State Use Only

APPROVED BY: Dr. J. Hankin TITLE Approval Granted providing work is complete by 12/17/09 DATE 9/17/09

Conditions of Approval (if any):

WELLNAME: Ibis "XU" State Com #3 FIELD: FOOR RANCH Wolfcamp
 LOCATION: 1650' FNL + 1980' FEL Sec 25, T9S, R26E Chaves Co, NM
 GL: 3817' ZERO: _____ AGL: _____ KB: 3826
 SPUD DATE: _____ COMPLETION DATE: 11/15/88
 COMMENTS: _____

CASING PROGRAM	
SIZE/WT/GR/CONN	DEPTH SET
8 3/8", 24.0 #/ft, J-55, STC	1,185
5 1/2", 16.50 #/ft, J-55, STC	6,232

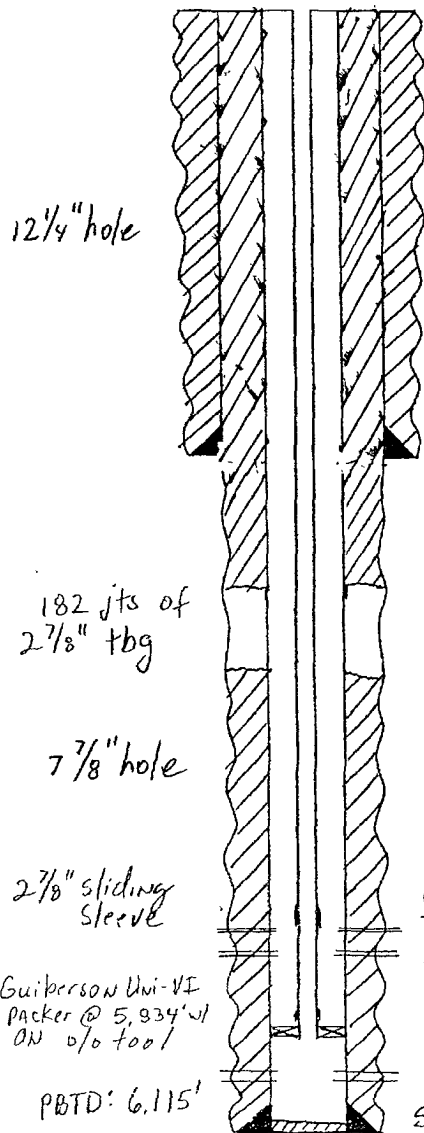

BEFORE

8 3/8" @ 1,185' CMTD W/ 650 SACKS, CMT CIRC TO SURFACE

DV Tool @ 2,186' CMTD W/ 360 SACKS (Circ.)
 TOC: 4806' (CBL)

Fm. tops	
San Andres:	1188'
Glorieta	2309'
Yeso	2378'
Abo	4544'
WC	5212'
Penn clastic	5832'
Cisco	5731'
OrdO	5905'
PreCamb,	6121'

Wolfcamp
 5,260' - 5,270' w/ 2 j spf "A"
 5,302' - 5,314' w/ 2 j spf "B"

Guiberson Uni-VI
 Packer @ 5,934' w/
 ON o/p tool

PBTD: 6,115'

Ordovician
 5,910' - 5,972' w/ 30 holes 11/12/88
 5 1/2" @ 6,232' CMTD W/ 350 SACKS


TD: 6,232'

- SKETCH NOT TO SCALE -

DATE: 11/20/00 JLP

WELLNAME: Ibis "XU" State Com #3 FIELD: FOOK RANCH Wolfcamp
 LOCATION: 1650' FNL & 1980' FEL Sec 25, T9S, R26E Chaves Co, NM
 GL 3817' ZERO: _____ AGL: _____ KB: 3826
 SPUD DATE: _____ COMPLETION DATE: 11/15/88
 COMMENTS: _____

CASING PROGRAM	
SIZE/WT/GR/CONN	DEPTH SET
8 3/8", 24.0 #/ft, J-SS, STIC	1,185
5 1/2", 16.50 #/ft, J-SS, STIC	6,232

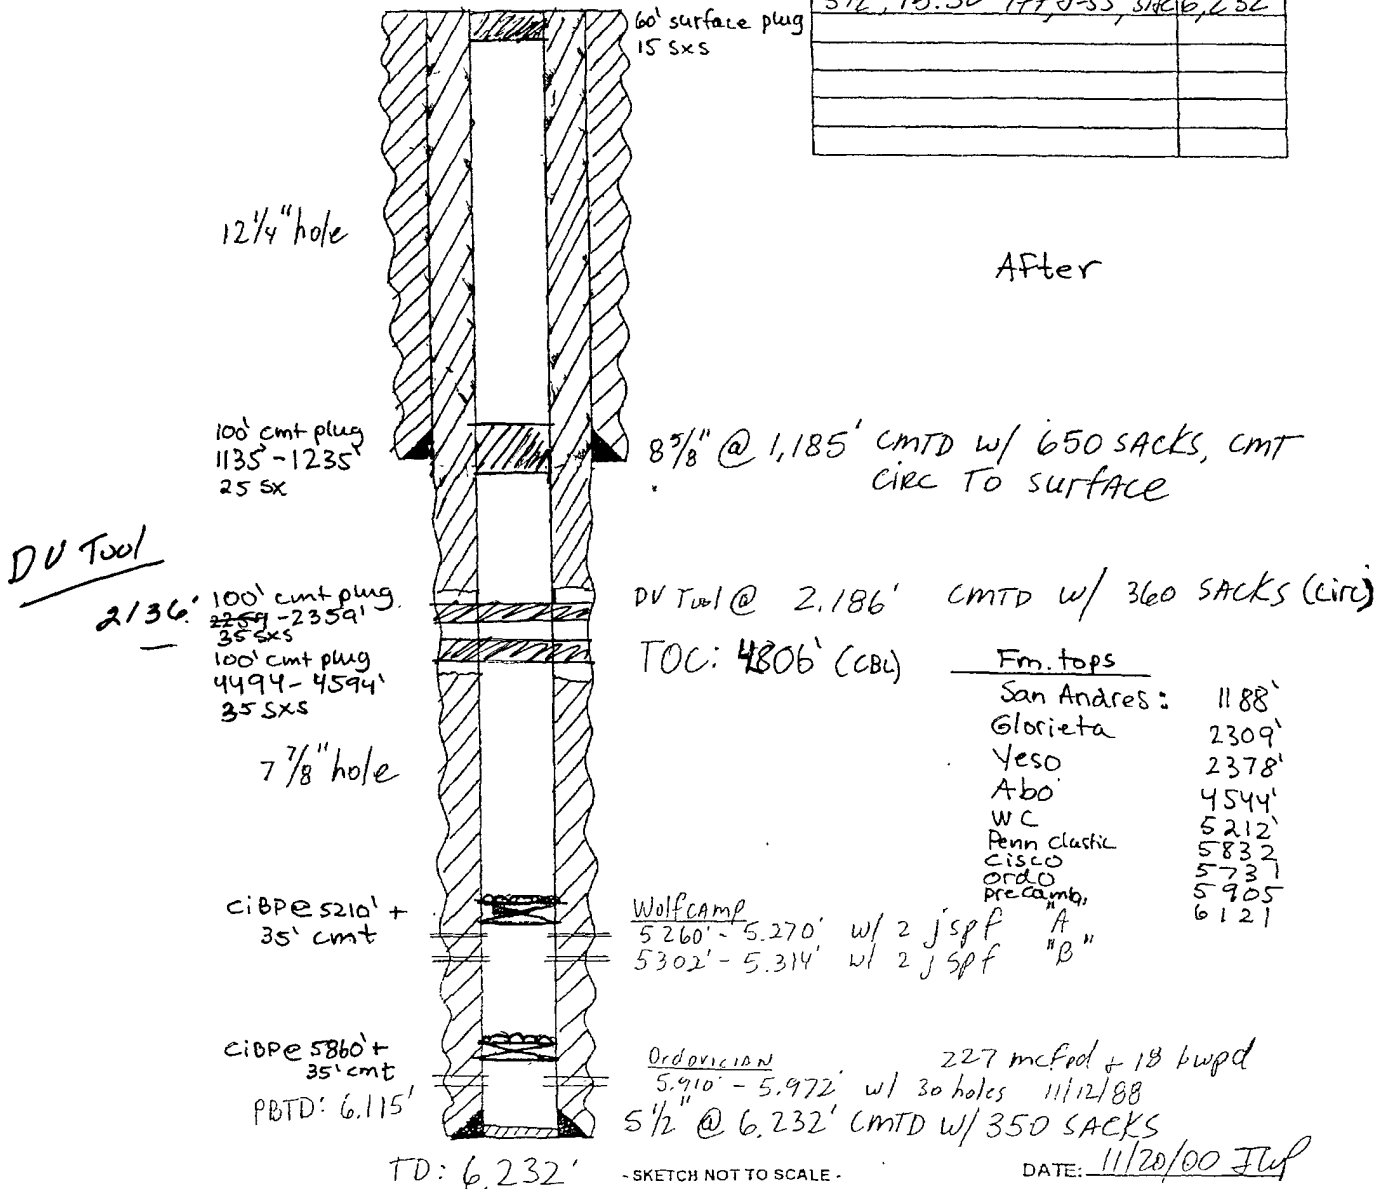

- SKETCH NOT TO SCALE -